

**The Belmont and Sutton
Muslim Assembly (BASMA)**

**Sutton Ambulance Station,
Dorset Road, SM2 6JH**

**Delivery & Servicing
Management Plan**

November 2025

Caneparo Associates Limited
21 Little Portland Street
London W1W 8BT
Tel: 020 3617 8200

www.caneparoassociates.com

Registered in England: 9930032

Contents

1	INTRODUCTION	1
	Aims & Objectives.....	1
	Targets.....	2
	Benefits.....	2
	DSMP Structure	2
2	THE SITE AND LOCAL HIGHWAY NETWORK	4
	The Site.....	4
	Local Highway Network	5
3	SERVICING ARRANGEMENTS.....	6
	Proposed Servicing Strategy.....	6
	Goods-In-Manager	6
	Servicing Movements.....	6
	Servicing Hours.....	7
	Vehicle Routing	7
4	WASTE STRATEGY	9
5	MEASURES & INITIATIVES	11
	Highway Safety and Pedestrian Management	11
	General Initiatives	11
	Waste and Recycling Initiatives.....	11
6	MONITORING & REVIEW OF THE PLAN.....	13
7	CONCLUSION.....	14

1 INTRODUCTION

1.1 This Delivery & Servicing Management Plan ('DSMP') has been prepared by Caneparo Associates on behalf of The Belmont and Sutton Muslim Assembly (BASMA) ('the Applicant') to provide a delivery and servicing plan with regard to the proposals at Sutton Ambulance Station, SM2 6JH (the 'site'), located within the London Borough of Sutton ('LBS').

1.2 A description of the proposed development is as follows:

w"Change of use from Use Class Sui Generis (ambulance station) to Mixed Use Classes F.1 (place of worship) and F.2 (community hub) including the erection of a single storey side and rear extension."

1.3 This DSMP sets out how deliveries, servicing and waste collection associated with the Development will be managed and controlled. It has been prepared with consideration of national, strategic and local planning policy.

1.4 This DSMP has been prepared in accordance with the 'Delivery and Servicing Plan Guide' 2020 TfL guidance, with regard to compliance with British Standard BS5906:2005 Waste management in buildings – Code of practice and Building Regulations 2000, Part H6.

Aims & Objectives

1.5 The principal aim of the DSMP is to manage deliveries and servicing (including waste collection) to and from the Development, in order to ensure that servicing activity is undertaken successfully, efficiently, sustainably and without conflict between vehicles and / or vulnerable road users.

1.6 The DSMP includes measures to ensure servicing and waste collection is undertaken efficiently and successfully.

1.7 The DSMP will enable future deliveries, where possible and necessary, to be reduced, re-timed and re-routed. Deliveries by smaller vehicles will always be a priority, as will delivering outside of weekday peak hours.

Targets

1.8 The following targets will be set for this DSMP:

- To ensure safe and suitable access is maintained at all times to the waste to maintain safe and suitable access for waste collection operatives; and,
- To target all deliveries and servicing activity to be undertaken on-site using the parking area.
- To ensure the waste storage area is clear from obstruction to ensure a smooth collection procedure.
- To ensure safe and suitable access is maintained at all times to the waste storage to maintain safe and suitable access for waste collection operatives.

Benefits

1.9 The DSMP aims to bring about a continual improvement in the way deliveries and servicing is undertaken by reducing its effect on the environment and local highway. It also brings about a number of benefits to the organisations and users of the Development, including the following:

- Opportunities to consolidate deliveries, saving time and money.
- Improvements to safety by reducing the number of deliveries and focussing delivery activity to specified locations on-street.
- Reducing harmful emissions through the use of greener and smaller vehicles.
- Improving the scheduling of deliveries to reduce non-attendances, unsuccessful deliveries or idling vehicles waiting to access the loading facilities.
- Reducing the potential for having to wait/load/unload illegally.
- Reducing congestion and environmental impacts, conversely resulting in improved air quality.
- Improving amenity for users of the Development and the local area through reduced noise, emissions and intrusion from vehicles.

DSMP Structure

1.10 The remainder of the DSMP is set out as follows:

- Section 2 – describes the site and local highway network;
- Section 3 - sets out the Development's servicing arrangements;

- Section 4 – sets out the waste storage and collection arrangements;
- Section 5 - covers the measures and initiatives of the DSMP;
- Section 6 - details the monitoring and review of the DSMP; and
- Section 7 – provides a conclusion.

2 THE SITE AND LOCAL HIGHWAY NETWORK

The Site

- 2.1 The existing site comprises of the disused Sutton Ambulance Station, Access to the site for pedestrians, cyclists and vehicles is from Dorset Road which is located along the southern frontage of the site.
- 2.2 The site location in relation to the surrounding transport network is illustrated in **Figure 2.1** below.

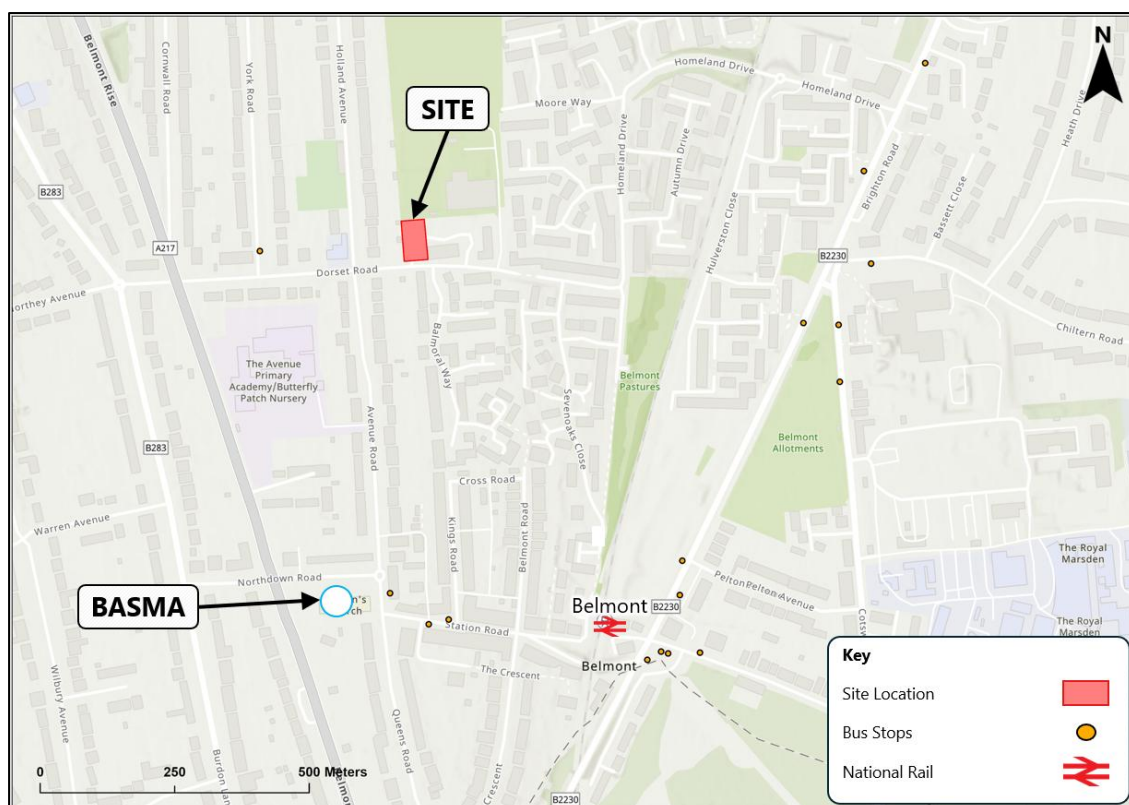


Figure 2.1: Site Location Plan

Source: ArcGIS Pro 2025

- 2.3 At present the Belmont and Sutton Muslim Assembly ('BASMA') use St John's Community Hall on Northdown Road, SM2 6DY. The existing space used by BASMA is located approximately a 470m / 6-minute walk to the south of the site.
- 2.4 The surrounding area is predominantly residential in nature. The east, south and west of the site is bounded by residential houses whilst to the north is the Sutton Bowling Club. As with the existing BASMA site at St John's Community Hall, the proposed development will primarily serve the local residential catchment and therefore generate mostly localised trips.

Local Highway Network

Dorset Road

- 2.5 Dorset Road is located at the southern boundary of the site and operates in a broadly east-west orientation. Dorset Road provides one lane for general traffic in each direction and measures circa 7.5m in width near the site frontage. Approximately 160m west of the site there is a cycle gate, which only permits through access onto Brasted Close for cyclists and emergency vehicles (via a gated access). In addition, there is a raised table junction 50m west from the site. Traffic along Dorset Road is subject to a 30mph speed limit and is provided with street lighting along its entire length.

Controlled Parking Zone

- 2.6 Dorset Road is not part of a Controlled Parking Zone and therefore allows on-street parking. In addition, goods vehicles in excess of 5t and buses are not permitted to stop on the road overnight between the hours of 18:30-08:00 on all days of the week.

3 SERVICING ARRANGEMENTS

Proposed Servicing Strategy

- 3.1 Servicing activity for the place of worship / community centre is anticipated to be limited to a small number of deliveries per month, typically using staff or volunteer vehicles as necessary.
- 3.2 Staff / volunteers or couriers bringing goods to the site will be able to stop within the site using one of the car parking bays to deliver goods to the site. Larger deliveries e.g. flat pack furniture deliveries may require the use of Dorset Road – this will be very rare, i.e. limited to just a few times per year.

Goods-In-Manager

- 3.3 The Site Management Team (SMT) will take responsibility for the facilities management and operation of the Development. The SMT will identify a 'Goods-In Manager' responsible for vehicle servicing at the Development to ensure that vehicles load and unload in line with the delivery arrangements set out above. The Goods-In-Manager contact details will be included within the final version of the DSP:

Goods-In-Manager

Name: TBC

Company: TBC

Contact Details: TBC

Address: TBC

Servicing Movements

- 3.4 There is expected to be a very low number of deliveries at the site, up to a maximum of 2 per week.
- 3.5 In addition, it is expected that the majority of deliveries will be performed either by staff / volunteers who will be visiting the site regardless (e.g. a staff member could stop at a supermarket to get tea and coffee supplies on their way to pray) or by couriers undertaking delivery routes in

the Belmont area already and therefore will not be creating new trips, e.g. a Royal Mail courier may first deliver a parcel to a house on Sutton Road and then stop at the site.

- 3.6 Servicing will be managed on-site through the implementation of a Final Delivery & Servicing Management Plan following any award of planning permission, anticipated to be secured by way of planning condition.

Servicing Hours

- 3.7 The SMT will encourage deliveries to any scheduled deliveries to take place outside of the peak hours between 08:00-09:00 and 17:00-18:00 – thus avoiding pedestrian and vehicular peaks in the area.

Vehicle Routing

- 3.8 Delivery and servicing teams will be advised to utilise major local roads when reaching the Development, limiting the use of narrower sections of highway.
- 3.9 It is anticipated that vehicles will arrive / depart from the A217 which is located to the west of the Site, using the following routes.
- Access Route: Belmont Rise (A217) – Dorset Road – On-site Car Park.
 - Egress Route: On-site Car Park – Dorset Road – Belmont Rise (A217).

Delivery Vehicle Types

- 3.10 Deliveries to the proposed development will primarily be by staff / volunteer cars and other small vehicles on account of the type of goods typically delivered, such as e-commerce deliveries and postal mail.
- 3.11 Examples of the types of vehicles that will form the majority of servicing for the development are included at **Figure 3.2** below.
- 3.12 Where infrequent larger vehicles are required e.g. for flat pack furniture delivery, it is envisaged these will make use of suitable kerbside space on Sutton Road adjacent to the site; examples of these vehicles are shown at **Figure 3.3** below.

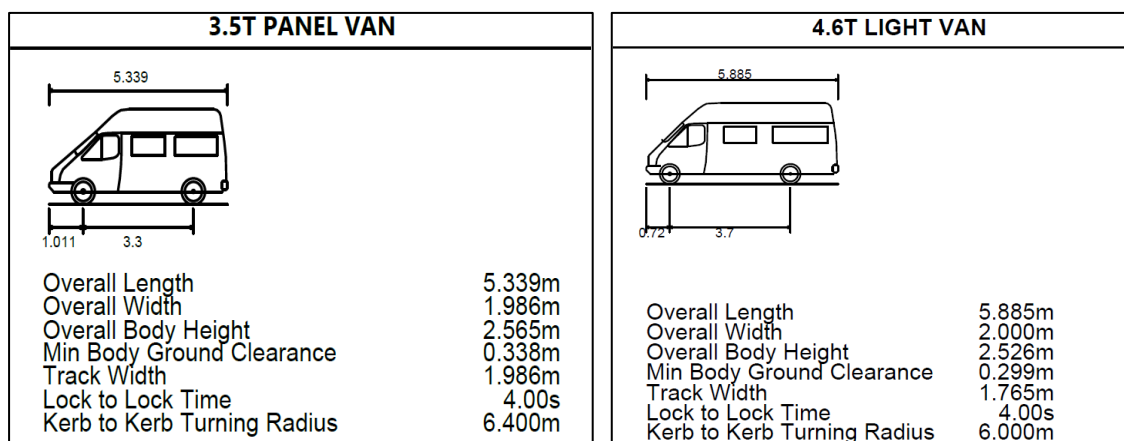


Figure 3.2: Examples of Typical Daily Servicing Vehicles

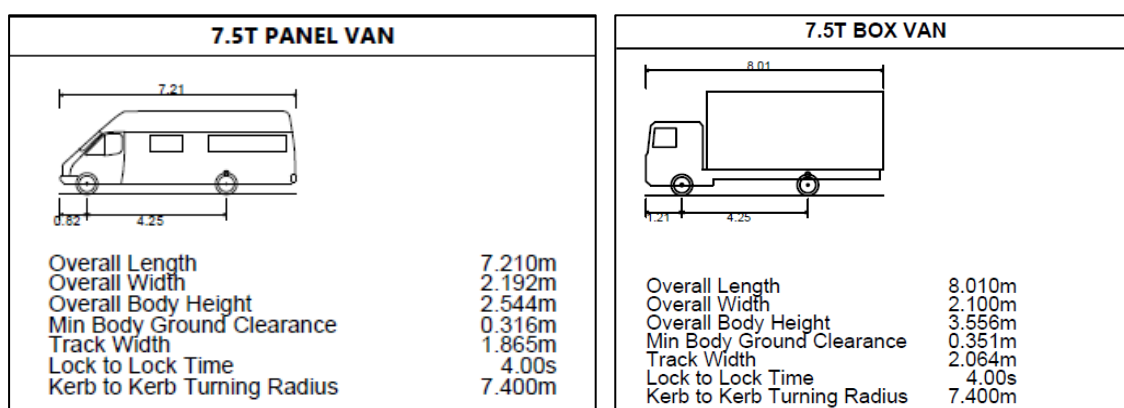


Figure 3.3: Examples of Infrequent Larger Servicing Vehicles

4 WASTE STRATEGY

4.1 The proposed strategy relies upon the creation of new waste stores within the northwest corner of the site.

4.2 Waste/recycling volume is very limited for a place of worship / community centre and will be stored within a secure and covered store at ground level. To store the waste, the following containers will be provided:

- 1 x 1,100L Eurobin for general waste;
- 1 x 1,100L Eurobin for dry mixed recycling; and,
- 2 x 140L Eurobin for food waste.

4.3 The layout of the waste stores is illustrated in **Figure 4.1** below.

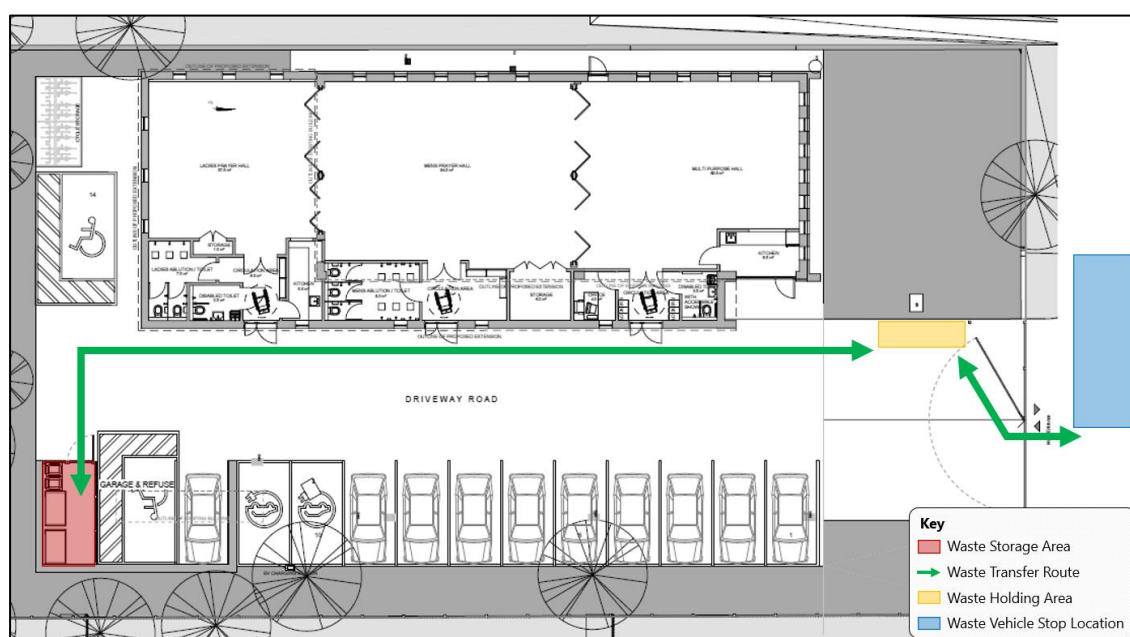


Figure 4.1: Proposed Waste Storage Layout

Source: Atelier UWA 2025

4.4 The design and layout of the waste stores will accord with the requirements of British Standards BS5906:2005.

4.5 Waste will be stored externally in the northwestern corner of the site. On a collection day, a community leader / volunteer from the site will move the relevant bins to the waste holding area, which is within 10m of the waste collection.



- 4.6 Once a collection has been completed, a community leader / volunteer will move the bin back to the waste storage area in a timely manner.
- 4.7 Waste will be stored externally at any time and waste will not be permitted to be stored on the public highway which is not necessary as a consequence of the proposed collection strategy.

5 MEASURES & INITIATIVES

- 5.1 A Site Management Team (SMT) will oversee the operations of servicing and waste activity at the site. This will be a member of the development operators' team and will frequently be on-site to ensure cleanliness and order is maintained on-site.

Highway Safety and Pedestrian Management

- 5.2 The protection of pedestrians in and around the vehicle activity space is a key priority of the DSMP. The SMT will ensure that all regular development operator managed suppliers and drivers are aware of the importance of due care and consideration when within the site vehicle activity area to prevent conflict between manoeuvring vehicles and pedestrians.
- 5.3 The site will be monitored continuously by the SMT via CCTV to ensure that all vehicles adhere to the DSMP measures, and pedestrian safety is not compromised.

General Initiatives

- 5.4 In order to meet the Objectives of the DSMP, the following initiatives will be adopted:
- The SMT will be aware of anticipated deliveries, including information such as likely arrival days, times, location and estimated duration of stay.
 - Suppliers / drivers will be informed that vehicle engines must be switched off whilst goods are being loaded / unloaded (i.e. when their vehicle is stationary).
 - The SMT will be responsible for maintaining a logbook, including a record of any accidents or near misses and, if necessary / appropriate, will act accordingly so as to avoid the potential for future problems.
 - The SMT will investigate the potential for consolidation of deliveries / suppliers to reduce the number of deliveries made to the development.
 - The SMT will be responsible for the smooth and efficient operation of the DSMP for the site.

Waste and Recycling Initiatives

- 5.5 The following initiatives and measures will be in place for waste and recycling.
- The SMT will be responsible for ensuring that waste is stored appropriately and, subsequently, made available in good time at the bin presentation area prior to collection;



- The SMT will make community leaders aware of the waste and recycling regime for the site, including where waste is stored, how it is segregated between general and recyclable waste and when the collections occur;
- Waste containers will not be left outside of the agreed waste storage areas;
- The SMT will encourage delivery drivers take away their packaging to minimise the accumulation of waste;
- The waste storage area will be kept clear from obstruction and in good order as far as is reasonably practicable. The waste store will be inspected on a regular basis and cleaned when necessary; and
- The SMT will be responsible for ensuring that waste is stored appropriately and is available in good time prior to collection.

6 MONITORING & REVIEW OF THE PLAN

- 6.1 The SMT will maintain a record of servicing activity across the site where possible. A periodic record will be kept such that an annual review can be undertaken of servicing activity to understand any issues and / or opportunities to improve the way in which servicing is undertaken.
- 6.2 The following information will be recorded for reoccurring deliveries to the site or indeed larger more infrequent deliveries:
- Day
 - Date
 - Delivery slot(s) booked
 - Type of vehicle
 - Goods carried
 - Time of arrival
 - Time of departure
 - Any other comments
- 6.3 The SMT will constantly monitor / review the success of the DSMP and, if considered necessary / appropriate, will propose changes to the document that will need to be approved by LBS.
- 6.4 The SMT will review any comments received from community leaders, couriers, retailers and / or third parties regarding servicing and waste collection activity.

7 CONCLUSION

- 7.1 Overall, the DSMP will ensure the successful operation of servicing activity and waste collection on a day-to-day basis.
- 7.2 The document will ensure that conflicts with pedestrians and other vehicles will be minimised and that the servicing of the site will not affect the free flow or environmental condition of the public highway.
- 7.3 The DSMP will also ensure waste collection is managed appropriately to avoid any impact on the amenity of surrounding premises.