

**The Belmont and Sutton
Muslim Assembly (BASMA)**

**Sutton Ambulance Station,
Dorset Road, SM2 6JH**

Transport Statement

December 2025

Caneparo Associates Limited
21 Little Portland Street
London W1W 8BT
Tel: 020 3617 8200

www.caneparoassociates.com

Registered in England: 9930032



Contents

1	INTRODUCTION	1
2	EXISTING SITUATION	2
	The Site and Surrounding Area	2
	Local Highway Network	3
	Parking Surveys	3
	Accessibility	4
	Travel Surveys	9
3	PLANNING POLICY	13
	National Transport Policy	13
	Regional Transport Policy	15
	Local Transport Policy	18
	Policy Summary	20
4	DEVELOPMENT PROPOSAL	21
	Access Arrangements	21
	Parking	21
	Servicing and Waste Collection	22
	Site Operations	22
5	TRIP GENERATION AND PARKING ANALYSIS	25
	Existing Trip Generation	25
	Proposed Trip Generation	25
	Parking Demand	26
	Conclusion	27
6	SUMMARY AND CONCLUSION	28
	Summary	28
	Conclusion	29

Appendices

Appendix A	-	Architect's Layout Plans
Appendix B	-	LBS Pre-Application Advice
Appendix C	-	Parking Beat Survey
Appendix D	-	Travel Survey Data
Appendix E	-	Weekly Schedule

1 INTRODUCTION

1.1 Caneparo Associates is appointed by The Belmont and Sutton Muslim Assembly (BASMA) ('the Applicant') to provide traffic and transportation advice with regard to the proposals at Sutton Ambulance Station, SM2 6JH ('the site') in the London Borough of Sutton ('LBS').

1.2 The proposal comprises the redevelopment of the site to provide a circa 294.5 sqm GIA multi-purpose community centre (the 'BASMA Community Centre') which will be used as a place of worship and as the hub for a range of activities such as sports, gardening and a youth club. The proposals will be accompanied by car & cycle parking in addition to waste storage.

1.3 A copy of the proposed layout plan is included at **Appendix A**, with the description of development as follows:

"Change of use from Use Class Sui Generis (ambulance station) to Mixed Use Classes F.1 (place of worship) and F.2 (community hub) including the erection of a single storey side and rear extension."

1.4 It should be noted that this report benefits from pre-application advice received from LBS on the 28th August 2025, and the points raised have been responded to accordingly, including parking surveys undertaken as requested. The pre-application advice is included at **Appendix B**.

1.5 This report considers the effects of the proposed development in terms of trip generation, access, parking, servicing, and waste storage and collection. It concludes that the proposal is acceptable in traffic and transport terms.

1.6 The remainder of the report is set out as follows;

- Section 2 summarises the existing site conditions and its accessibility;
- Section 3 provides relevant planning policy;
- Section 4 describes the development proposal;
- Section 5 includes the trip generation and parking analysis; and,
- Section 6 summarises and concludes.

2 EXISTING SITUATION

The Site and Surrounding Area

- 2.1 The site is located on the northern side of Dorset Road, with Belmont Station located circa 680m / 8-9 minutes' walk to the southeast of the site. A site location plan is shown in **Figure 2.1** below.

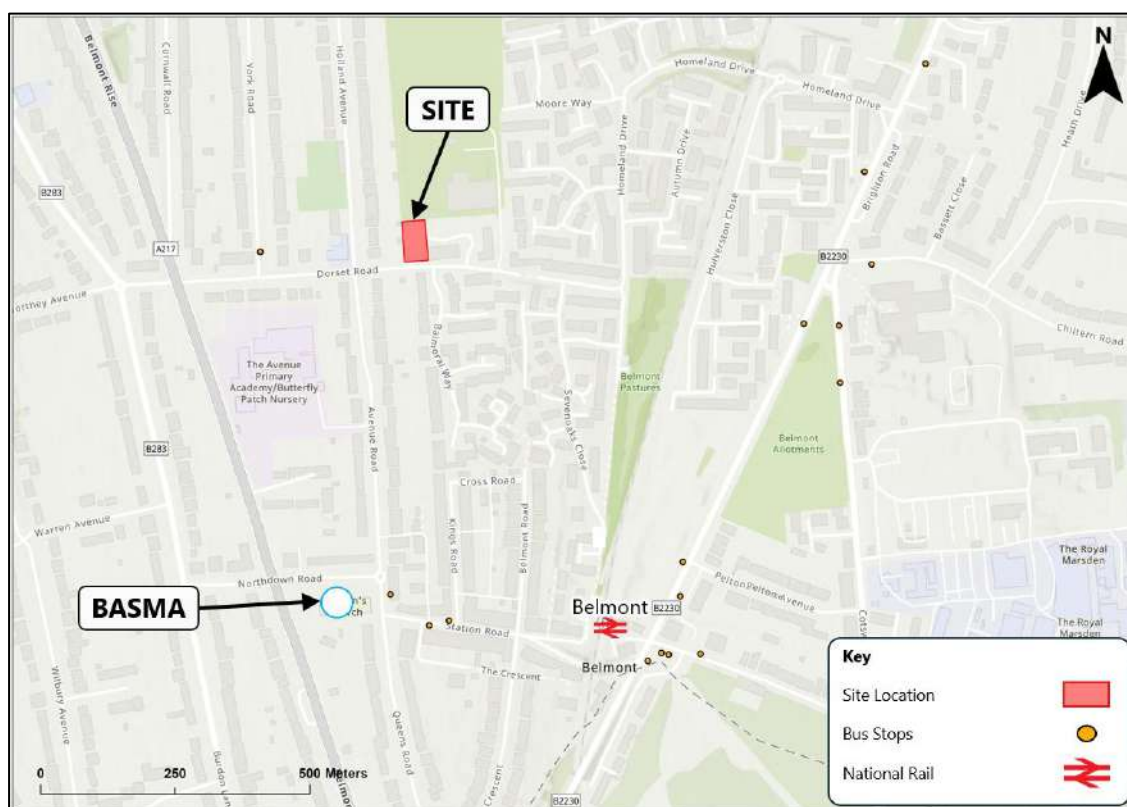


Figure 2.1: Site Location Plan

Source: ArcGIS Pro 2025

- 2.2 The existing site comprises of the disused Sutton Ambulance Station. Access to the site for pedestrians, cyclists and vehicles is from Dorset Road which is located along the southern frontage of the site.
- 2.3 At present the Belmont and Sutton Muslim Assembly ('BASMA') use St John's Community Hall on Northdown Road, SM2 6DY. The existing space used by BASMA is located approximately a 470m / 6-minute walk to the south of the site.
- 2.4 The surrounding area is predominantly residential in nature. The east, south and west of the site is bounded by residential houses whilst to the north is the Sutton Bowling Club. As with the existing BASMA site at St John's Community Hall, the proposed development will primarily serve the local residential catchment and therefore generate mostly localised trips.

Local Highway Network

Dorset Road

- 2.5 Dorset Road is located at the southern boundary of the site and operates in a broadly east-west orientation. Dorset Road provides one lane for general traffic in each direction and measures circa 7.5m in width near the site frontage. Approximately 160m west of the site there is a cycle gate, which only permits through access onto Brasted Close for cyclists and emergency vehicles (via a gated access). In addition, there is a raised table junction 50m west from the site. Traffic along Dorset Road is subject to a 30mph speed limit and is provided with street lighting along its entire length.

Controlled Parking Zone

- 2.6 Dorset Road is not part of a Controlled Parking Zone and therefore allows on-street parking. In addition, goods vehicles in excess of 5t and buses are not permitted to stop on the road overnight between the hours of 18:30-08:00 on all days of the week.

Parking Surveys

- 2.7 A parking survey has been undertaken by Innowise Works to review the existing parking utilisation on the streets surrounding the site at different days and times across the week. Parking beat surveys were undertaken on the following days / times:
- Wednesday 1st October 2025 at 00:30.
 - Thursday 2nd October 2025 at 00:30.
 - Friday 3rd October 2025 at 10:00, 12:00 and 13:00.
- 2.8 The above therefore covers the busiest day associated with Friday prayers at the site, along with two overnight on two neutral weekdays.
- 2.9 For the daytime surveys, solely unrestricted parking was included whilst for the nighttime surveys single yellow line was included since the single yellow lines locally only restrict parking between 08:00-17:00 from Monday to Friday and between 09:00-14:30 on Saturdays.
- 2.10 The survey covered a 400m walking distance of the site which was provided to LBS ahead of surveys being undertaken, and a summary of the results included in **Table 2.1** below, while the full survey output data is included at **Appendix C**.

Table 2.1: Parking Survey Summary

Time Period	Calculated Capacity	Cars Parked	Observed Spaces	Parking Utilisation
Wednesday 1 st October – 00:30	292	70	222	24.0%
Thursday 2 nd October – 00:30	292	74	218	25.3%
Friday 3 rd October – 10:00	269	125	144	46.5%
Friday 3 rd October – 12:00	269	133	136	49.4%
Friday 3 rd October – 13:00	269	134	135	49.8%
<i>Neutral Weekday Overnight – Average</i>	<i>292</i>	<i>72</i>	<i>220</i>	<i>24.7%</i>
<i>Friday 3rd October – Average</i>	<i>269</i>	<i>131</i>	<i>138</i>	<i>48.6%</i>

- 2.11 The table above demonstrates that on average overnight parking occupancy on neutral weekdays was 24.7% across the surveyed times, with approximately 72 cars parked on-street. It is noted that the vast majority of houses in the vicinity of the site are provided with 1 or more off-street car parking spaces, which means that on-street demand is limited.
- 2.12 Across the day during Friday, there is an average parking utilisation of 48.6% which peaks at 13:00 when the utilisation reaches 49.8%. At 13:00 on Friday 3rd October, there were 134 cars parked on-street, with 135 observed spaces.
- 2.13 It is noted that the 400m parking survey scope includes some parking which may be used by users of the existing BASMA centre on Friday 3rd October.
- 2.14 The survey also shows that there is a significant amount of spare available parking capacity on-street overnight in the local area on neutral weekdays, with a very low average parking utilisation of 24.7% observed.
- 2.15 The effect of the site on parking utilisation in the local area is discussed further in Section 5.

Accessibility

- 2.16 The site is accessible by non-car modes being within walking and cycling distance of public transport services. As such, there is a range of opportunities for visitors of the site to use modes other than the private car.

Active Modes

Walking

- 2.17 At the frontage of the site, Dorset Road has pavement circa 1.5m in width, which accommodates pedestrian movement to and from the site. Approximately 50m / 1-minute walk west from the site access is a raised table junction with decreased lane width adjacent to the junction to encourage vehicle drivers to lower their speed at this junction, therefore creating a safer pedestrian environment.
- 2.18 Transport for London's (TfL's) Healthy Streets research states that 'if every Londoner walked or cycled for 20 minutes a day, it would save the NHS £1.7bn in treatment costs over the next 25 years', therefore the range of facilities within the 20-minute walking and cycling zone of the site will encourage future users of the site to achieve this target.
- 2.19 The 20-minute walking zone is shown at **Figure 2.2** which covers a large residential surrounding catchment from which the vast majority of visitors are likely to travel in the future.



Figure 2.2: 20-minute Walking Isochrone

Source: ArcGIS Pro 2025

2.20

Table 2.2 below presents a list of public transport and local amenities within walking distance of the site, with walking speeds of 80m per minute assumed. All distances are measured from the centre of the site.

Table 2.2: Approximate Distances to Public Transport / Local Amenities			
Amenity	Location	Distance (metres)	Approximate Walking Time
Public Transport Opportunities			
Bus Stops	York Road / Dorset Road	220m	3 minutes
	Belmont / Station Road (Westbound)	530m	7 minutes
	Belmont / Station Road (Eastbound)	550m	7 minutes
	Belmont Station / Station Road (Stop A)	770m	10 minutes
	Belmont Station / Station Road (Stop A)	800m	10 minutes
National Rail	Belmont Station	680m	8-9 minutes
	Cheam Station	1.5km	19 minutes
Local Amenities			
Downs Lawn Tennis Club	Holland Avenue	210m	3 minutes
Sutton Bowling Club	Bowling Way	370m	5 minutes
Hopscotch Day Nursery	Avenue Road	420m	5 minutes
St John's Community Hall (current location of BASMA)	Northdown Road	490m	6 minutes
Belmont GP Centre	Hardegray Close	570m	7 minutes
Jesmund Nursing Home	York Road	720m	9 minutes
Pine Dental	Station Approach	770m	10 minutes
Overton Park	Overton Road	820m	10 minutes
Hashmees Convenience Store	Rookley Close	970m	12 minutes
Shanklin Community Hall including Children's Centre	Rookley Close	1km	12-13 minutes
Belmont Park	Brighton Road	1km	12-13 minutes
Cheam Fields Sports Club	Devon Road	1.2km	15 minutes
Mulgrave Road Pharmacy	Upper Mulgrave Road	1.3km	16 minutes
Royal Marsden Hospital	Downs Road	1.3km	16 minutes
Overton Grange School	Stanley Road	1.5km	19 minutes

Cycling

2.21

Within the Healthy Streets guidance, TfL defines a 20-minute cycle as a suitable distance for visitors to travel to / from the site by bicycle. A 20-minute cycling isochrone around the site has been included in **Figure 2.3** below along with the local TfL cycleway network.

2.22 Within a 20-minute cycling distance from the site, several areas including Croydon, Wallington, Morden, Mitcham, Epsom and Sutton – in addition to many public transport nodes.

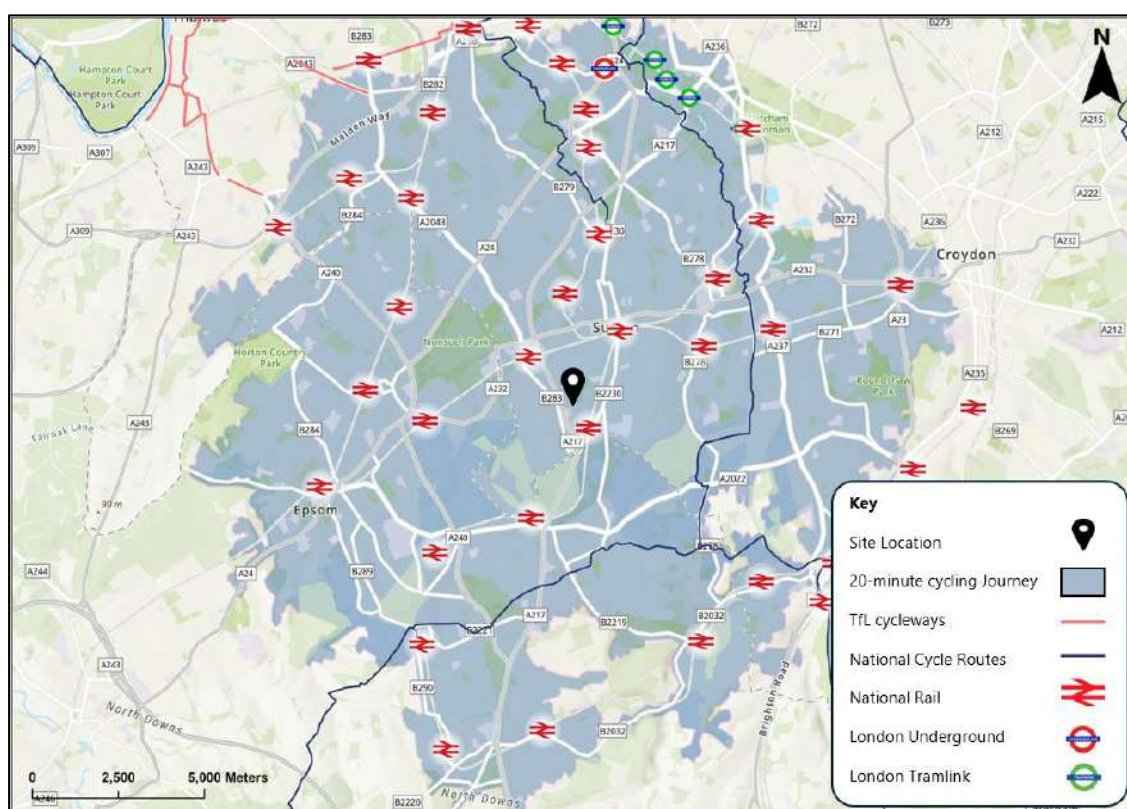


Figure 2.3: 20-minute Cycle Isochrone

Source: ArcGIS Pro 2025

2.23 The closest marked cycle route to the site is National Cycle Route (NCR) 20, approximately 3.2km (13-minute cycle) east of the site. NCR 20 connects London to Brighton starting in the north at the River Thames in Wandsworth. NCR 22 is also accessible, approximately 3.5km (14-minute cycle) south of the site, with this route operating from Banstead via Dorking, Guildford, Farnham and Portsmouth to Brockenhurst in the New Forest via Dorking, Guildford, Farnham and Portsmouth.

2.24 Along with official cycle routing, the site is close to several quiet streets and roads, which offer further connections for cyclists. Approximately 180m / 1-minute cycle west of the site there is a cycle gate, which only permits through access onto Brasted Close for cyclists and emergency vehicles (via a gated access). The presence of this cycle gate limits vehicle traffic in the local area, therefore making local roads safer for cyclists.

Public Transport

Public Transport Accessibility Level (PTAL) Rating

- 2.25 Public Transport Accessibility Levels (PTALs) are a theoretical measure of the accessibility of a given point to the public transport network, taking into account walk access time and service availability.
- 2.26 The PTAL is categorised in six levels, 1 to 6 where 6 represents an excellent level of accessibility and 1 a poor level of accessibility. It is then further sub-sectioned into 'a' and 'b', with 'a' being at the lower end of the spectrum and 'b' at the higher.
- 2.27 The PTAL rating of the centre of the site is 1a, suggesting the site has a 'very poor' level of accessibility to public transport. It is noted that the PTAL calculation report does not include the S2 and S4 bus services despite their good proximity to the site – whilst the distance to Belmont National Rail Station is also overstated by circa 185m or an additional 2-minute walk.
- 2.28 It is important to note that the proposals are intended to serve the local residential, with numerous properties within a 20-minute walking distance (as illustrated at **Figure 2.2** above). On this basis, it is considered that public transport accessibility has limited relevance, since as with the existing BASMA centre, the majority of trips are expected to be undertaken on foot.

Bus Services

- 2.29 The nearest bus stops to the site are located approximately 220m (3-minute walk) west, 530-550m (7-minute walk) south and 820m (10-minute walk) southeast. These bus stops provide services S2, S4 and 280 respectively.
- 2.30 It is noted routes S2 and S4 also operating as 'hail and ride' between stops, with it possible to access route S2 from the junction of Dorset Road and York Road (circa 190m / 2-minute walk from the site) and route S4 from the junction of Dorset Road and Holland Avenue (circa 90m / 1-minute walk from the site).
- 2.31 The Belmont Station / Brighton Road bus stop provides sheltered seating and timetable information. The York Road / Dorset Road bus stop comprises a flagpole with timetable information. The Belmont / Station Road (eastbound and westbound) bus stops provide a bus flag. The Belmont Station / Station Road bus stops 'A' and 'B' comprise sheltered seating with timetable information.

2.32 Bus services in the vicinity of the site are summarised in **Table 2.3** below.

Table 2.3: Summary of Bus Services				
No.	Route	Frequency (Every 'X' Minutes)		
		Mon-Fri	Saturday	Sunday
280	St George's Hospital – Tooting Broadway Station – Mitcham Tram Stop – Sutton Police Station- Sutton Hospital - Belmont/Brighton Road	8-12	8-12	11-13
S2	Epsom – Ewell – Cheam – Belmont – Sutton – St Helier Hospital – Rose Hill – St Helier Station	19-20	20-21	29-30
S4	Waddon Marsh Sainsbury's – Therapia Lane Tram Stop – Beddington / Asda – St Elphege's School - Sutton/Marshall's Road	20-21	19-20	30-32

2.33 It is also pertinent to note that the entirety of the London Bus network can be used by disabled users, owing to all buses containing a ramp and being low-floor accessible vehicles. In addition, all London buses are equipped with the 'iBus' system which provides audio / visual updates to passengers regarding route and stop information.

National Rail Services

2.34 The closest station to the site is Belmont National Rail Station which is located circa 680m southeast of the site (8-9 minutes' walk). Belmont National Rail Station is operated by Southern with the station offering access to 4 services per hour during the AM peak hour, with the being 2 services per hour to Epsom Downs and 2 services per hour to London Victoria. Trains to London Victoria take approximately 56 minutes.

2.35 Belmont National Rail Station has step free access to all platforms. There is tactile paving on all platforms and ramps available for alighting the train. The station also has cycle parking for up to 10 cycles.

Travel Surveys

Modal Split Data

2.36 Travel surveys have been conducted by BASMA in April 2025 for Friday Prayers to determine the modal split for Friday Prayer users at the current site, which operates out of St John's Community Hall.

2.37 It is noted that St John's Community Hall which is located just circa 480m / 6-minute walk south of the site and as such, it is considered that the surveyed modal split could be used as a baseline for the expected travel patterns of users at the proposed site.

2.38 The modal split for the existing BASMA location is detailed in **Table 2.4** below, with surveyed data attached **Appendix D**.

Table 2.4: Modal Split – Friday Prayers	
Mode	Census 2011 Modal Split (%)
Underground	0.0%
Train	0.0%
Bus	1.7%
Taxi	0.8%
Motorcycle	0.0%
Drive Alone	11.7%
Car Share (Driver)	20.0%
Car Share (Passenger)	14.2%
Bicycle	1.7%
On Foot	50.0%
Total	100.0%

2.39 The modal split surveys show that the majority of travel to the existing site is made using active or sustainable modes (53.4% of trips). In addition, there is a significant amount of car sharing already taking place, with 34.2% of surveyed visitors to the site either being the driver or a passenger in a car share.

Postcode Data

2.40 Residential postcode data was also collected in the survey, which has been plotted in **Figure 2.4** below. This shows that the vast majority of people live within a 20-minute walk of the site. It is noted that two respondents located near Brixton and Kensal Green have been excluded from the ArcGIS map.

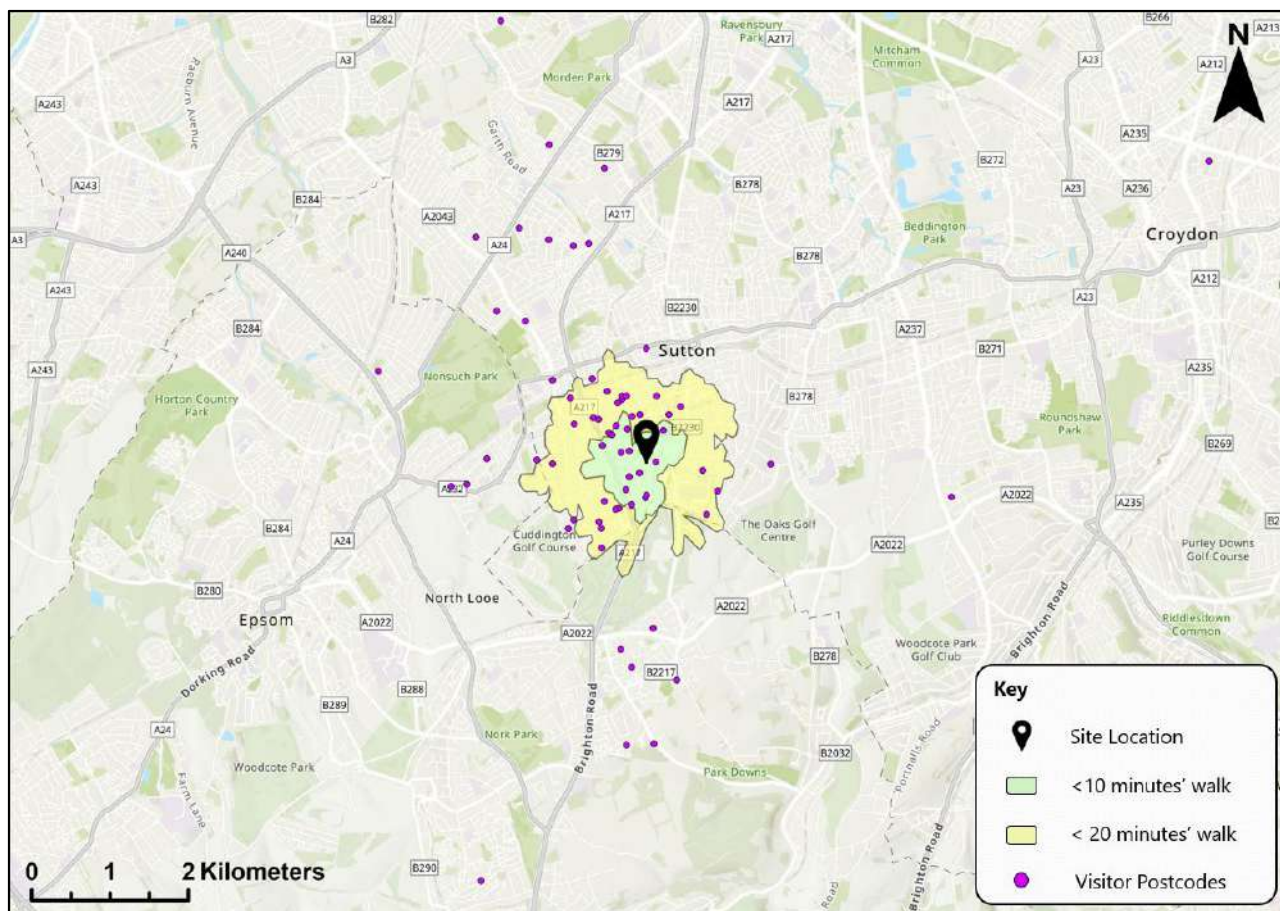


Figure 2.4: Existing Postcode Locations (Expanded Version)

Source: ArcGIS Pro 2025

2.41 A zoomed in version of the above is provided at **Figure 2.5** below, showing more clearly the amount of people who live within a 10-minute / 800m and 20-minute / 1.6km walk of the site.

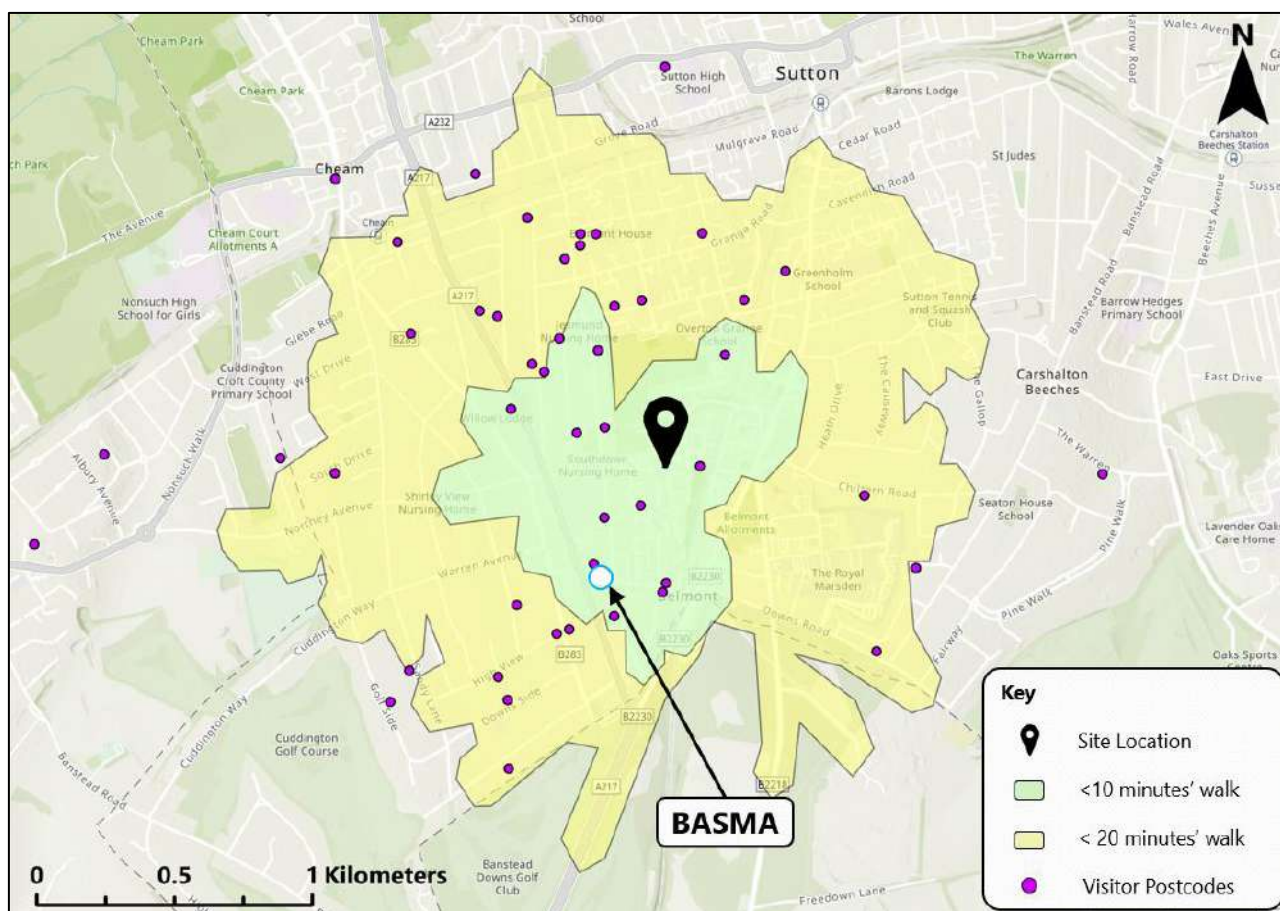


Figure 2.5: Existing Postcode Locations (Zoomed Version)

Source: ArcGIS Pro 2025

3 PLANNING POLICY

National Transport Policy

National Planning Policy Framework (December 2024)

3.1 The latest version of the National Planning Policy Framework (NPPF) was published in December 2024 and sets out the Government's planning policies for England and how these are expected to be applied.

3.2 Chapter 9 – 'Promoting Sustainable Transport' sets out central Government national transport policy.

3.3 The chapter notes at paragraph 109 that:

"Transport issues should be considered from the earliest stages of plan-making and development proposals, using a vision-led approach to identify transport solutions that deliver well-designed, sustainable and popular places. This should involve:

- a) making transport considerations an important part of early engagement with local communities;*
- b) ensuring patterns of movement, streets, parking and other transport considerations are integral to the design of schemes, and contribute to making high quality places;*
- c) understanding and addressing the potential impacts of development on transport networks;*
- d) realising opportunities from existing or proposed transport infrastructure, and changing transport technology and usage – for example in relation to the scale, location or density of development that can be accommodated;*
- e) identifying and pursuing opportunities to promote walking, cycling and public transport use; and*
- f) identifying, assessing and taking into account the environmental impacts of traffic and transport infrastructure – including appropriate opportunities for avoiding and mitigating any adverse effects, and for net environmental gains."*

3.4 The chapter continues at paragraph 110 by stating:

"The planning system should actively manage patterns of growth in support of these objectives. Significant development should be focused on locations which are or can be made sustainable, through limiting the need to travel and offering a genuine choice of transport modes. This can help to reduce congestion and emissions, and improve air quality and public health. However, opportunities to maximise sustainable transport solutions will vary between urban and rural areas, and this should be taken into account in both plan-making and decision-making."

3.5 When considering development proposals paragraph 115 notes that:

"In assessing sites that may be allocated for development in plans, or specific applications for development, it should be ensured that:

- a) sustainable transport modes are prioritised taking account of the vision for the site, the type of development and its location;*
- b) safe and suitable access to the site can be achieved for all users;*
- c) the design of streets, parking areas, other transport elements and the content of associated standards reflects current national guidance, including the National Design Guide and the National Model Design Code; and*
- d) any significant impacts from the development on the transport network (in terms of capacity and congestion), or on highway safety, can be cost effectively mitigated to an acceptable degree through a vision-led approach."*

3.6 With regards to assessing the impact of development, paragraph 116 and 117 states:

"Development should only be prevented or refused on highways grounds if there would be an unacceptable impact on highway safety, or the residual cumulative impacts on the road network, following mitigation, would be severe, taking into account all reasonable future scenarios."

Within this context, applications for development should:

- a) give priority first to pedestrian and cycle movements, both within the scheme and with neighbouring areas; and second – so far as possible – to facilitating access to high quality public transport, with layouts that maximise the catchment area for bus or other public transport services, and appropriate facilities that encourage public transport use;*
- b) address the needs of people with disabilities and reduced mobility in relation to all modes of transport;*

- c) *create places that are safe, secure and attractive – which minimise the scope for conflicts between pedestrians, cyclists and vehicles, avoid unnecessary street clutter, and respond to local character and design standards;*
- d) *allow for the efficient delivery of goods, and access by service and emergency vehicles; and*
- e) *be designed to enable charging of plug-in and other ultra-low emission vehicles in safe, accessible and convenient locations."*

3.7 The chapter concludes at paragraph 118 that:

"All developments that will generate significant amounts of movement should be required to provide a travel plan, and the application should be supported by a vision-led transport statement or transport assessment so that the likely impacts of the proposal can be assessed and monitored."

Regional Transport Policy

The London Plan (March 2021)

3.8 The new London Plan forms a material consideration in planning decisions, it considers six core 'good growth' statements, which state the following with regards to transport:

'GG2 Making the best use of land – Point G: plan for good local walking, cycling and public transport connections to support a strategic target of 80 per cent of all journeys using sustainable travel, enabling car-free lifestyles that allow an efficient use of land, as well as using new and enhanced public transport links to unlock growth.

GG3 Creating a healthy city – Point B: Promote more active and healthy lives for all Londoners and enable them to make healthy choices.

GG3 Creating a healthy city – Point C: Use the Healthy Streets Approach to prioritise health in all planning decisions.'

3.9 Chapter 10 of the London Plan considers a range of policies relevant to Transport, with Policy T1 considering the aspirations of the London Mayor, Policy T2 focusing on Healthy Streets, Policy T3 setting out considerations for sustainability, Policy T4 considering the assessment and mitigation of new developments, Policy T5 reviewing the provision of cycling, Policy T6 considering car parking and Policy T7 setting out requirements for servicing and construction.

3.10 Policy T1 reiterates the range of targets set out in the Mayors Transport Strategy for Londoners to achieve by 2041, including travel by walking, cycling and public transport accounting for 80% of trips undertaken in London, 20 minutes of exercise achieved daily and Vision Zero, whereby there will be no fatalities or serious incidents on London's roads.

3.11 Policy T2 highlights the importance of Healthy Streets at the strategic, network and street level. This policy echoes the need to reduce reliance on the private car and seeks to retain and improve connectivity through London for walking and cycling. It also identifies the changes in demand for London streets across the day.

3.12 Policy T4 – Assessing and mitigating transport impacts provides the following advice:

"b) When required in accordance with national or local guidance, transport assessments / statements should be submitted with development proposals to ensure that impacts on the capacity of the transport network (including impacts on pedestrians and the cycle network), at the local, network-wide and strategic level, are fully assessed. Transport assessments should focus on embedding the Healthy Streets Approach within, and in the vicinity of, new development. Travel Plans, Parking Design and Management Plans, Construction Logistics Plans and Delivery and Servicing Plans will be required having regard to Transport for London guidance."

3.13 Policy T5 Cycle Parking - sets out the London Plans minimum cycle parking standards for developments, as summarised in **Table 3.1** below.

Table 3.1: Minimum Standards Cycle Parking		
Use Class	Long-stay	Short-stay
D1 – other (e.g. library, church, etc.)	1 space per 8 FTE staff	1 space per 100 sqm (GEA)

3.14 Policy T6.5 sets out the requirements for non-residential disabled persons parking, as follows:

"A - Disabled persons parking should be provided in accordance with the levels set out in Table 10.6, ensuring that all non-residential elements should provide access to at least one on or off-street disabled persons parking bay.

B - Disabled persons parking bays should be located on firm and level ground, as close as possible to the building entrance or facility they are associated with.

C - Designated bays should be marked up as disabled persons parking bays from the outset.

D - Enlarged bays should be large enough to become disabled persons parking bays quickly and easily via the marking up of appropriate hatchings and symbols and the provision of signage, if required i.e. if it can be demonstrated that the existing level of disabled persons parking is not adequate. The process for converting enlarged bays should be set out in a Parking Design and Management Plan and secured at the planning stage.

E - Designated disabled persons parking bays and enlarged bays should be designed in accordance with the design guidance provided in BS8300: Vol 1."

- 3.15 Table 10.6 states that for religious buildings and crematoria, a minimum of two spaces or 6% (whichever greater) of the total parking provision should be accessible bays, with a further 4% of parking to be provided as enlarged bays for future provision.

The Mayor's Transport Strategy (March 2018)

- 3.16 The Mayor's Transport Strategy (MTS) was published in March 2018 and is a policy document developed in conjunction with the London Plan and the Economic Development Strategy as part of a strategic policy framework to support and shape the economic and social development of London over the next 20 years. The document outlines the Mayor's vision and how TfL and its partners will achieve the vision.

- 3.17 The Mayor's Transport Strategy sets out the Mayor's policies and proposals to reshape transport in London over the next two decades. The document includes three key themes as set out below, all of which are considered and addressed by the proposed development.

1. Healthy streets and healthy people – creating streets and networks to encourage active and sustainable travel, reducing car dependency.
2. A good public transport experience – shifting journeys by private car to the public transport network.
3. New homes and jobs – unlocking growth through new homes and jobs, brought about through planning a city that encourages walking, cycling and public transport use.

Local Transport Policy

Sutton Local Plan 2016 – 2031 (February 2018)

- 3.18 Suttons Local Plan was adopted by the Council as a development plan document on 26 February 2018. This Local Plan sets out the Councils strategic objectives, planning policies and proposals for the future development and growth of the Borough over the period 2016-2031.
- 3.19 Policy 22: 'Social and Community Infrastructure' states that:
- a) *"The council will grant planning permission for the development of social and community infrastructure where it;*
 - i. *is accessible by a range of transport modes, in particular by walking, cycling and public transport.*
 - ii. *provides flexible and adaptable space, where practicable.*
 - iii. *is close to or accessible to the community it is intended to serve and is of a suitable scale to meet that need.*
 - iv. *is designed and sited to enable the shared use of premises and playing fields for community purposes*
 - v. *would not have any adverse environmental effects,*
 - vi. *in the case of proposals for large developments generating significant numbers of trips, such as indoor sports facilities, are located within or on the edge of town centres or other areas of higher public transport accessibility."*
- 3.20 Policy 35: Transport Proposals states that 'the council will support and implement transport improvements to expand and enhance the boroughs transport infrastructure in order to widen transport choice and support new development':
- a) *"The council will encourage the improvement of public transport services and infrastructure across the borough and measure to promote walking and cycling. This includes:*
 - *improvements to investigate trains and trams sharing the existing rail corridor between Sutton and Belmont*

- *Improvements to rail capacity and services across the borough*
- *rail stations access and interchange improvements including step free access and improved bus/train interchange facilities/services*
- *improvements and extensions to bus services and infrastructure, e.g. improvements to frequency and duration of services (such as Sunday services), bus priority measures, improved bus stops and real time information*
- *improvements to walking and cycling facilities e.g. both new segregates cycle and shared paths, improved footways and crossings and new cycle 'Quietway's'."*

3.21 Policy 36: Transport Impact states that

- a) *"Development proposals will be assessed for their impact on the highway and public transport network as well as the local environment and should be located so as to minimise any adverse impact on the highway network and maximise the use of sustainable modes of transport. Major trip-generating developments should be located in town centres and other locations with good public transport accessibility or take steps to raise the public transport accessibility levels (PTAL) through improvements to public transport.*
- b) *Applicants should set out how they propose to manage and mitigate the transport impacts of their development. Therefore, Transport Assessments and Travel Plans will be required for all major development applications while for smaller developments Transport Statements will be required. For most developments, Construction and Logistics Plans are likely to be required. Where developments are likely to generate significant goods vehicle movements, either operationally or during construction, Delivery and Service Plans are likely to be required.*
- c) *Planning permission will not be granted unless any transport improvements considered necessary by the council to overcome any adverse impacts of the development can be secured by planning agreement (S106 Obligations) / planning conditions or an undertaking given by the developer that they will be implemented as part of the development."*

3.22 Policy 37: 'Parking' states:

- a) *"New developments will be expected to provide car parking in accordance with the council's restraint -based maximums car parking standards taking into account public transport*

accessibility levels, existing publicly available parking provision and usage in the vicinity of the site, and the need to deter unnecessary car use while avoiding overspill parking problems

A proportion of all parking spaces should be provided for parking for disabled people and the charging of electric vehicles. New developments will also be required to provide cycle parking in accordance with the council's cycle parking standards. Details of these standards and how they will be applied are set out in Appendix 11."

- 3.23 A summary of the LBS standards is detailed in **Table 3.2** below, with it noted that the cycle parking standards mirror those of the London Plan 2021.

Table 3.2: Maximum Standards for Parking		
Use Class	Parking Type	Maximum Standards
D1 – Non-Residential Institutions (Places of Worship)	Car Parking	1 space per 15m ² (GFA)
	Cycle Parking	1 space per 8 staff (long stay) 1 space per 100m ² (visitor/short stay)

Policy Summary

- 3.24 Planning policy at all levels advocates the need for accessible and well-located development along with the need for assessment of the impacts arising from new development. The proposed place of worship / community centre is located close to the large residential catchment it is proposed to serve, thus reducing the need to travel long distances and/or by unsustainable modes of travel.
- 3.25 The proposal will be car light, with a total of 10 general car parking spaces, 2 accessible parking spaces and 2 EV charger spaces. To promote active modes, an overprovision of cycle parking is proposed when compared to the London Plan 2021 and the LBS Local Plan, with a total of 8 cycle parking space provided at ground level.
- 3.26 In addition, this report sets out detailed information regarding how the site will operate and the travel patterns of visitors, demonstrating that it will not result in a significant impact on the local transport network. This will be further supported by the implementation of a Travel Plan secured by planning condition.
- 3.27 In light of the above, it is concluded that the use of the site is in accordance with the planning policy guidance at all levels.

4 DEVELOPMENT PROPOSAL

- 4.1 The proposal comprises the redevelopment of the site to provide a circa 294.5 sqm GIA multi-purpose community centre (the 'BASMA Community Centre') which will be used as a place of worship and as the hub for a range of activities such as sports, gardening and a youth club. The proposals will be accompanied by car & cycle parking in addition to waste storage.
- 4.2 A copy of the proposed layout plan is included at **Appendix A**.

Access Arrangements

- 4.3 The main vehicle access into the premises will be taken from Dorset Road using the retained crossover at the southern frontage of the site, as per the existing arrangement. Cyclists will also use this access to enter the site, whilst pedestrians will use the footway next to the crossover.

Proposed Highway Works

- 4.4 In line with the LBS pre-application advice, the Applicant commits to removing the existing 'Keep Clear' carriageway marking, zig zag lines and accompanying signage near the site access which will be made redundant by the change of use.
- 4.5 In the place of the existing 'Keep Clear' carriageway marking and zig zag lines, the Applicant will fund the provision of double yellow lines across the site access.

Parking

Car Parking

- 4.6 The proposed development will have a total of 10 general car parking bays, 2 disabled parking bays and 2 EV charging bays. These will be situated along the access road on the northern and west boundaries of the site.
- 4.7 This parking provision is considered to reflect the need to balance the low accessibility to public transport of the site and the lack of parking controls on the surrounding roads, with the need to promote the use of sustainable and in particular, active modes of transport to reach the site.
- 4.8 It is anticipated that the majority of users expected to travel to the site will use active and sustainable modes, given that the facility serves the local residential catchment and is located just

a 470m / 6-minute walk away from the existing hall used by BASMA, where this was the case. The potential effect on parking is discussed further in Section 5.

Cycle Parking

- 4.9 The proposals require 1 long-stay and 4 short-stay cycle parking spaces in accordance with the London Plan 2021 requirements for the 'D1 other (e.g. library, church, etc.)' standards, when assuming that the site has 8 FTE (full time equivalent) staff.
- 4.10 A total of 8 cycle parking spaces are proposed at the site, which represents a overprovision which accords with the Applicant's desire to encourage users of the site to access the site using active modes. All cycle parking spaces are secure and covered.

Servicing and Waste Collection

- 4.11 Servicing activity for the place of worship / community centre is anticipated to be limited to a small number of deliveries per month, typically using staff or volunteer vehicles as necessary. All regular servicing activity will be able to take place from the front of the site, with vehicles stopping off-street.
- 4.12 Waste/recycling volume is very limited for a place of worship / community centre and will be stored within a secure and covered store at ground level. To store the waste, the following containers will be provided:
- 1 x 1,100L Eurobin for general waste;
 - 1 x 1,100L Eurobin for dry mixed recycling; and,
 - 2 x 140L Eurobin for food waste.

Site Operations

- 4.13 An activity schedule for the community and place of worship has been provided by the Applicant, which sets out the maximum attendance figures for various prayers and classes. The site will operate daily with the following hours:
- Community Use: Monday to Sunday (07:00-22:00).
 - Prayer Use: Monday to Sunday (times vary based on solar cycle, open up to 23:00 latest).

4.14 A summary of the key weekly activities and attendance levels is provided in **Table 4.1** below, with a copy of the full schedule attached at **Appendix E**.

4.15 It is noted that the time of prayers can vary due to the solar cycles and the change from Greenwich Mean Time (GMT) to British Summer Time (BST).

Table 4.1: Weekly Schedule and Attendance Numbers			
Day(s)	Activity	Time	Maximum Attendance
Prayers			
Mon-Sun	Fajr Prayer	10 minutes (c. 07:00)	5-7
Sat-Thu	Zuhr Prayer	15 minutes (c. 13:00)	7-10
Mon-Sun	Asr Prayer	10 minutes (c. 16:00)	7-10
Mon-Sun	Maghrib Prayer	15 minutes (c. 18:00)	15-20
Mon-Sun	Isha Prayer	20 minutes (c. 19:00)	10-15
Fri	Jummah Prayer Session 1 (Winter)	11:50-12:30	160
Fri	Jummah Prayer Session 2 (Winter)	12:55-13:40	90
Fri	Jummah Prayer Session 1 (Summer)	12:50-13:35	160
Fri	Jummah Prayer Session 2 (Summer)	15:00-15:45	80
Community Activities			
Mon	Ladies Keep Fit Classes*	10:00-11:00	12-15
Mon	Men's Study Circle*	19:00-20:00	10-12
Tues	Ladies Study Circle*	10:00-11:00	12-15
Tues	Health and Wellbeing Sessions, Advice & Counselling Sessions (Open to all)	19:00-20:00	8-10
Wed	Ladies Counselling Session	10:00-12:00	8-12
Wed	Multi-faith Events* (up to 4 times yearly)	17:30-19:30	10-50
Thu	Seniors Lunch Club	13:30-14:30	12
Thu	Girls and Young Women (16-23) Get Together / Counselling	18:00-20:00	10
Fri	Youth Club (Boys)	19:00-20:00	12
Sat	Saturday Cycling Club (Meet up)	07:00-07:15	8-10
Sat	Saturday Walking Club for Seniors	10:00-12:00	10-12
Sat	Supplementary School / Homework Club for Young People Key Stage 1, 2, 3 & 4	10:00-13:00	10-15
Sat	Drop-in sessions / information / advice / health & wellbeing (Diet, Diabetes, Smoking, Heart Health)	14:00-16:00	10-12
Sat	Community Functions / Events (1 time per month)*	Only when another activity is not taking place (i.e. between 07:15-10:00, 13:00-14:00 or after 16:00).	80

Table 4.1: Weekly Schedule and Attendance Numbers			
Day(s)	Activity	Time	Maximum Attendance
		Ends before than 21:00.	
Sun	Gardening Club*	11:00-13:00	5-10
Sun	Table Tennis Open Session	14:00-17:00	10-12
Sun	Men's & Boy's Keep Fit*	17:00-18:00	10-15
Sun	Bereavement Counselling, coffee and tea etc. (Open to all)	19:00-20:00	8-10
* = Current activity to be continued at new BASMA centre, noting that most current activities are ad hoc due to the difficulty of booking community space at the existing site due to lack of availability – and thus lack of consistency for the delivery of certain programmes.			

- 4.16 Throughout the year, a total of 240-250 attendees are expected across the Friday Prayer sessions per Friday, however due to solar cycles, the gap between the Summer sessions is significantly longer (1 hour, 25 minutes) than the Winter sessions (25 minutes).
- 4.17 During the Summer Friday Prayers, owing to the large gap it is anticipated that there will be no overlap between the two sessions (i.e. all visitors to Session 1 will have left before the first visitor from Session 2 arrives).
- 4.18 The peak travel demand associated with the Winter Friday Prayer Session changeover is assessed further in Section 5.

5 TRIP GENERATION AND PARKING ANALYSIS

5.1 This section of the report reviews the effects of the proposals in relation to trip generation and parking.

Existing Trip Generation

5.2 Due to the ambulance station being out of use for several years, a full existing trip generation assessment has not been undertaken however the following is noted:

- The removal of this use from the site will reduce vehicle traffic at unsociable hours late at night, since the ambulance station previously operated 24 hours a day.
- The yellow keep clear lines at the site access will be able to be removed, which will improve the streetscape and improve local parking amenity for local residents and site users.
- There will be a significant decrease in noise and light pollution due to the removal of ambulances arriving and departing from the site.

5.3 It is noted that the existing site has space for a significant amount of vehicles to park – with space for circa 18 vehicles externally and 3 vehicles internally. As such, the proposed development will lead to a reduction in the amount of vehicle parking at the site.

Proposed Trip Generation

5.4 As discussed previously, the busiest time during the week is expected to be during the changeover of the two Jummah Prayer Sessions on Friday during Winter, with a reduced demand at all other times.

Friday Prayer Peak

5.5 For the Winter Friday Prayers due to the limited gap between sessions, it is expected that there could be a small amount of overlap between visitors from Session 1 leaving and visitors to Session 2 arriving. For a worst-case assessment, it has been assumed that all 160 visitors from Session 1 and 90 visitors from Session 2 will be in the vicinity of the site at the same time.

5.6 To determine the potential impact of the proposals on the local network, the travel survey data from **Table 2.4** has been used and applied to the number of people expected to arrive and depart from the site during the busiest hour for on-street parking i.e. an hour that includes 12:30-12:55, as shown in **Table 5.1** below.

Table 5.1: Method of Travel to Site			
Method of Travel	Modal Split (%)	Jummah Prayer Changeover (12:30-12:55)	
		In	Out
Underground	0.0%	0	0
Train	0.0%	0	0
Bus	1.7%	3	2
Taxi	0.8%	1	1
Motorcycle	0.0%	0	0
Drive Alone	11.7%	19	11
Car Share (Driver)	20.0%	32	18
Car Share (Passenger)	14.2%	23	13
Bicycle	1.7%	3	2
On Foot	50.0%	80	45
Total	100.0%	160	90
<i>Note: minor numerical discrepancies are due to rounding</i>			

- 5.7 The above demonstrates that the majority of people are expected to use active modes to access or egress the site (51.7%) during the prayer changeover period.
- 5.8 The data shows that that as a worst-case very briefly there could be up to 80 vehicles parked within the site car park and on-street locally between the two Friday Prayer sessions (total of the 'drive alone' and 'car share driver' mode shares for both sessions). There will be a significantly lower demand at all other times.

Parking Demand

- 5.9 The data shows that as a worst-case briefly during the overlap period there could be up to 80 vehicles parked on-site or on local streets. There will be a significantly lower on-street demand at all other times.
- 5.10 The site is provided with a total of 14 car parking spaces, with it assumed that up to 3 car parking spaces could be used by staff at the site. As such, it is expected that 11 car parking spaces on-site will be used by attendees of the first session with the remaining 69 vehicles associated with the overlap being parked on-street.
- 5.11 It is noted that this is a worst-case, since the people parked on-site and on the roads close to the site have the shortest distance to walk to their vehicles and are therefore expected to have left the local area before Session 2 attendees arrive. The Applicant has informed us by the time Session 2 begins, approximately 90% of Session 1 visitors have left the premises.

5.12 In addition, as previously mentioned some of the streets within the 400m parking beat scope are also within 400m of the existing BASMA centre on Northdown Road. As such, there may be some vehicles double counted, however this is considered to make the assessment robust and solidifies that it is indeed a worst-case scenario for the local area.

5.13 A robust assessment where 11 vehicles park at the site and the remaining 69 vehicles are on-street has been undertaken in **Table 5.2** below.

Table 5.2: Parking Survey Summary – Winter Friday Prayers (Worst Case)				
Time Period	Calculated Capacity	Cars Parked	Observed Spaces	Parking Utilisation
Friday 3rd October – 13:00	269	134	135	49.8%
Friday 3rd October – 13:00 (+ 66 vehicles)	269	203	66	75.5%

5.14 The demand of 66 additional vehicles parking on-street near to the site during the 25-minute overlap could cause parking occupancy to increase from 49.8% to 75.5%, with 66 spaces still being available.

5.15 The results also show that there is space for an additional 25 vehicles to park on-street locally before parking stress is achieved (utilisation is at 84.8% when 228 vehicles are parked on-street), which is defined by LBS as the level of on-street parking utilisation reaching 85%, such that there will be no impact on the ability of residents or others to be able to park on-street during Friday prayers.

Conclusion

5.16 The worst-case scenario assessment set out above finds that during the overlap between the two Winter Friday Prayer (Jummah) sessions, there is a considerable amount of on-street parking left remaining in the worst-case for use by residents near the site.

6 SUMMARY AND CONCLUSION

Summary

- 6.1 Caneparo Associates is appointed by Cheam Muslim Welfare Services Limited ('the Applicant') to provide traffic and transportation advice with regard to the proposals at Sutton Ambulance Station, Dorset Road, SM2 6JH ('the site') in the London Borough of Sutton ('LBS').
- 6.2 The proposal comprises the redevelopment of the site to provide a circa 294.5 sqm GIA multi-purpose community centre (the 'BASMA Community Centre') which will be used as a place of worship and as the hub for a range of activities such as sports, gardening and a youth club. The proposals will be accompanied by car & cycle parking in addition to waste storage.
- 6.3 The proposal has been assessed taking into consideration policy and existing conditions and can be summarised as follows;
- The site is well located for community use, being located in close proximity to the residential catchment it will serve. It also benefits from convenient access to local bus services (with route S2 and S4 operating as hail and ride near the site) and Belmont National Rail Station;
 - The site is also well-located for cycle access, being located in an area with low vehicle traffic and close to several marked cycle routes. Cyclists travelling to the site will be able to utilise cycle parking opportunities on site, with a total of 8 cycle parking spaces proposed which is in excess of the London Plan 2021 standards;
 - The proposal includes a total of 10 general car parking spaces, 2 disabled bays and 2 EV charging bays. This provision is a suitable amount to allow the site to operate in an efficient manner when considering its accessibility whilst also being limited enough to passively encourage the use of active and sustainable modes;
 - Servicing activity for the place of worship / community centre is anticipated to be limited to a small number of deliveries per month, which will typically be completed on-site by staff and volunteer vehicles;
 - Travel surveys were undertaken of visitors during the Jummah Prayer sessions which suggest that over 50% of people use active modes (walking and cycling) to reach the site, while just 11.7% of people drive alone to the site;

- When applied to the busiest period (the 25 minute period between the Friday Prayer sessions in Winter) whereby 250 people would attend the site, this equates to up to 80 visitor cars associated with the site as a worst-case (however at least 11 of these cars are expected to park on-site);
- Parking surveys were also conducted at the 13:00 on a Friday, which suggested that existing parking utilisation at this was circa 49.8%. With an additional 66 vehicles parking on-street, parking utilisation could increase to 75.5% which demonstrates that there is still a considerable amount of on-street parking capacity at this time;
- The number of visitors and therefore cars associated with the site is expected to be significantly lower at all other times;
- A Travel Plan will be secured by way of planning condition which will introduce measures to further encourage travel by sustainable modes, reduce car travel, and manage the effects of arrivals/departures in the vicinity of the site.


Conclusion

6.4 In conclusion, it is considered that the development proposal is appropriate for the location and will not have a significant impact on the local transport network. It is consistent with relevant transport policy guidance and is considered to meet the key test of the NPPF at paragraph 116, which states that:

“Development should only be prevented or refused on highways grounds if there would be an unacceptable impact on highway safety, or the residual cumulative impacts on the road network, following mitigation, would be severe, taking into account all reasonable future scenarios.”

6.5 It is therefore considered that the proposed development should not be prevented or refused on transport grounds.

Appendix A

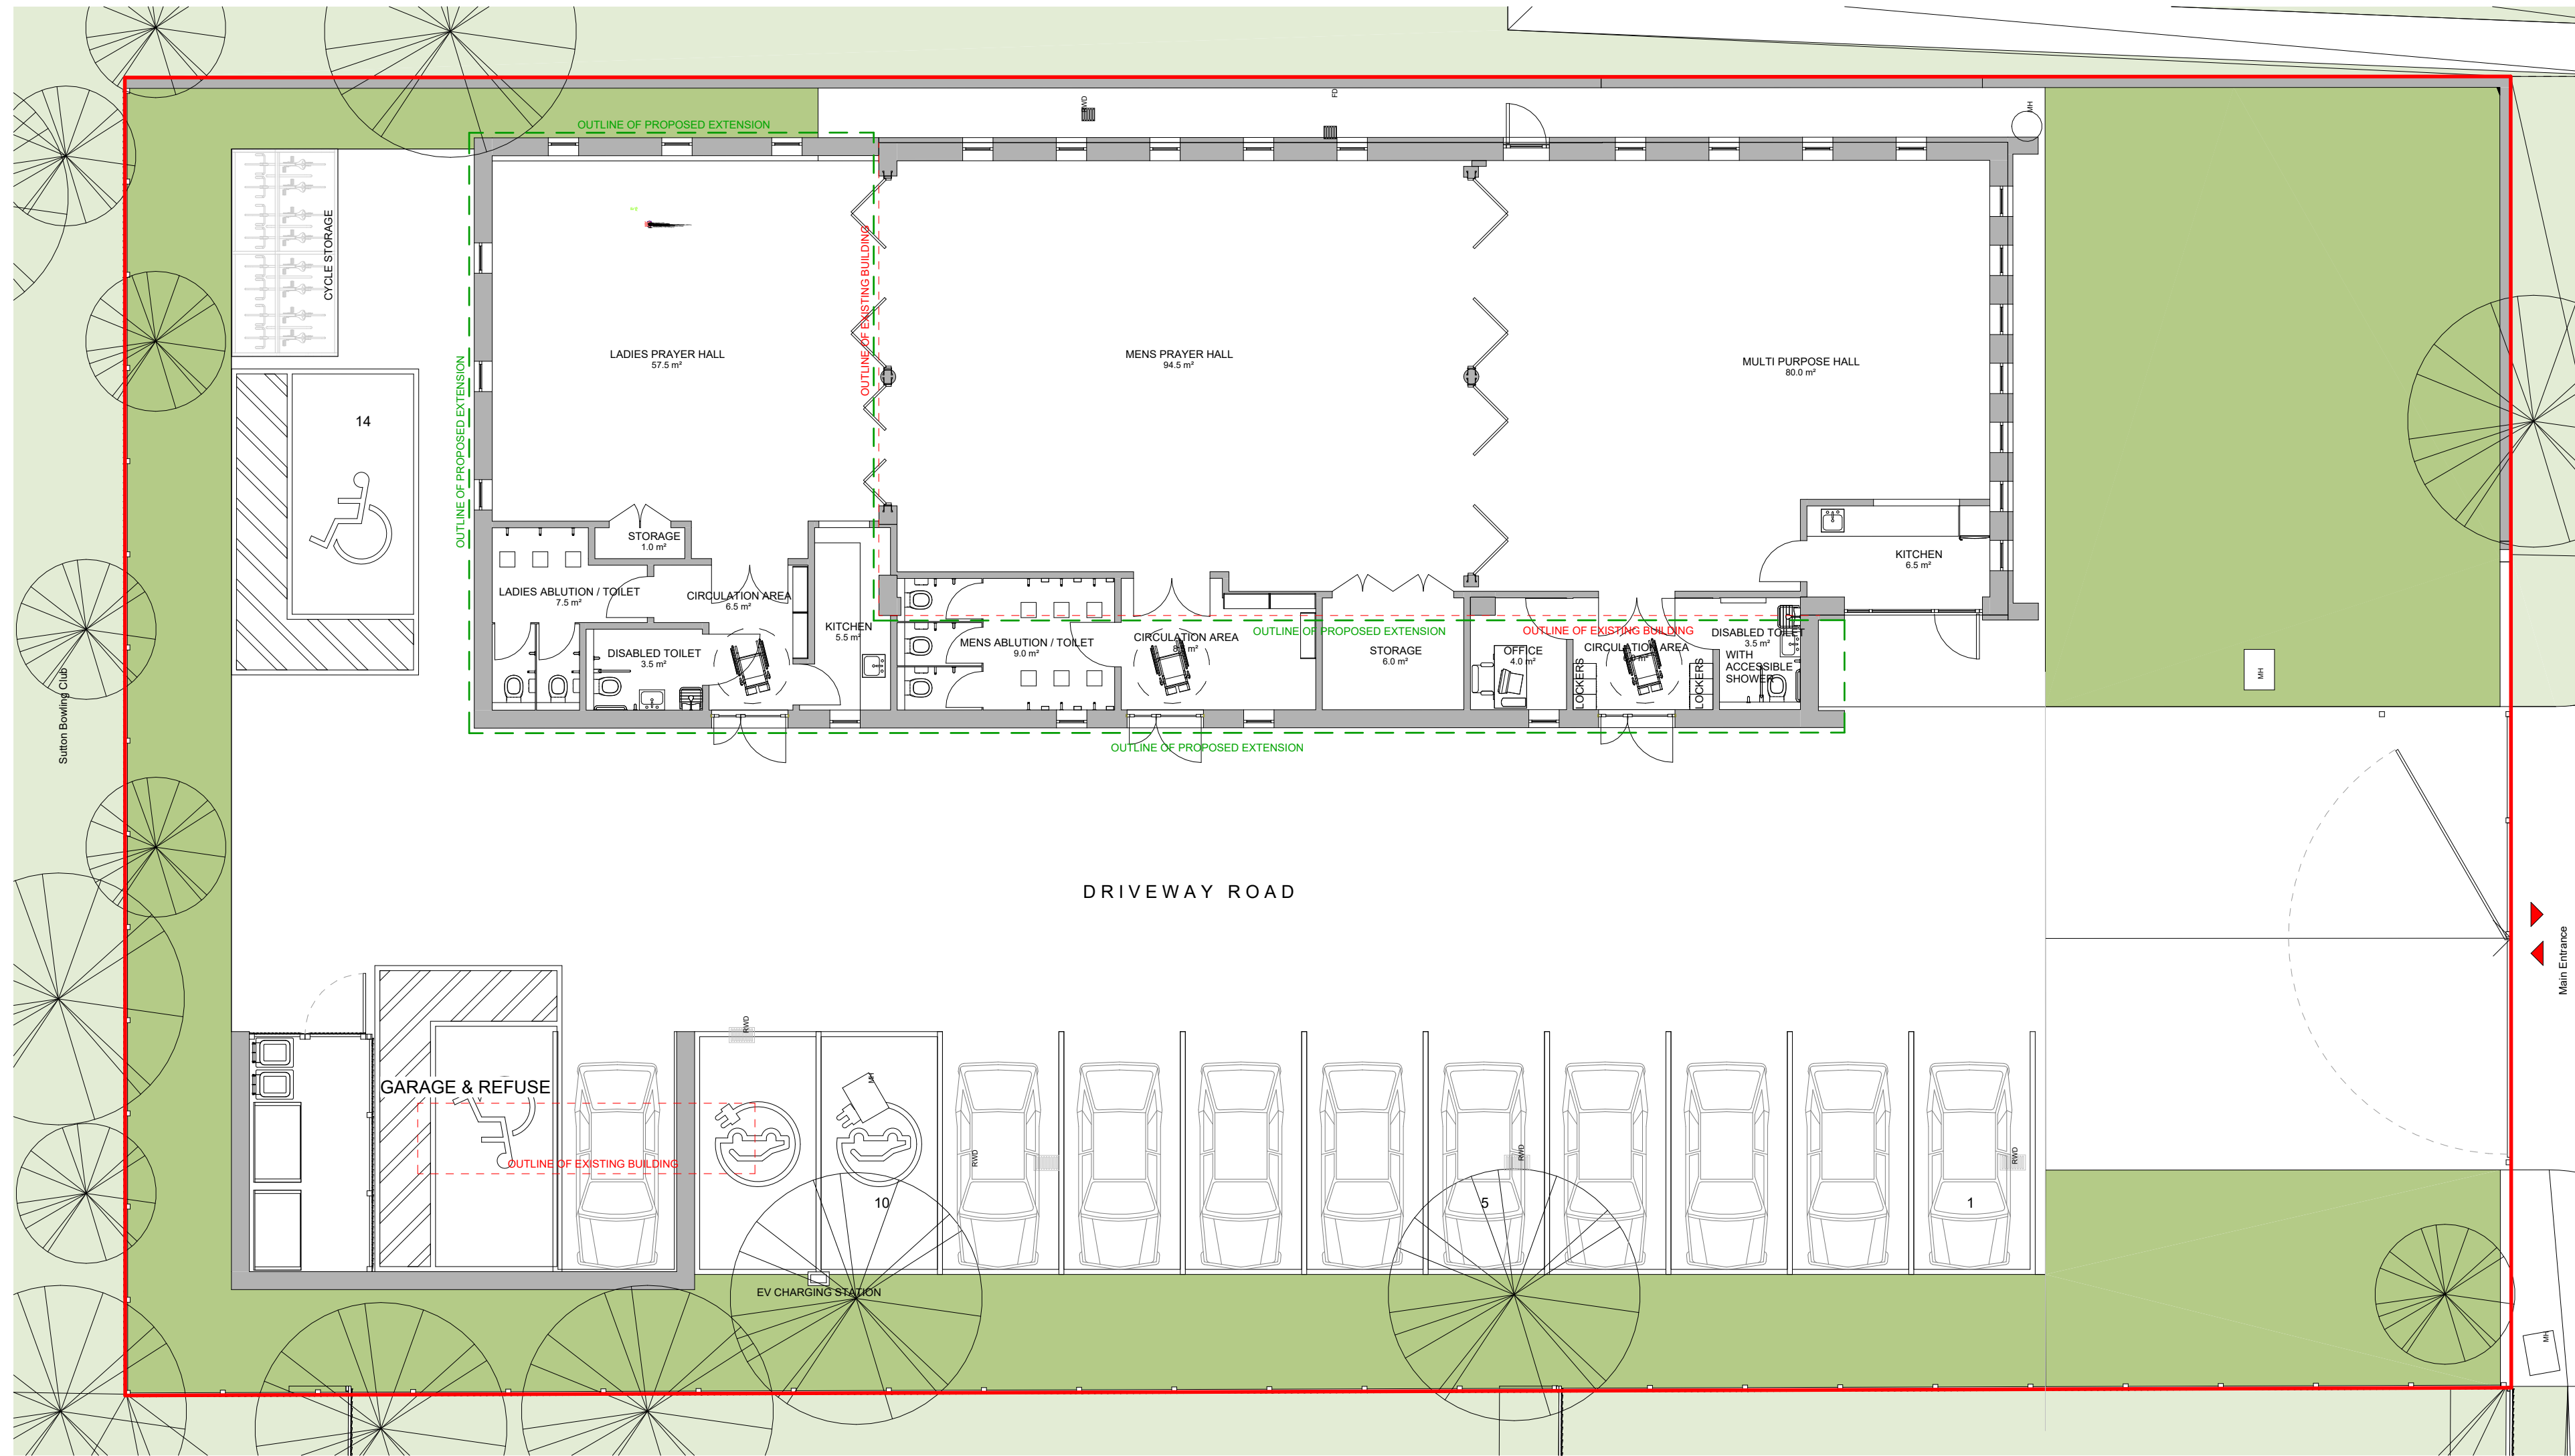



1 Proposed Site Layout Plan
1 : 100

Total car park space - 12 + 2 disabled


Key

--- Outline of Existing Building


--- Outline of Proposed Extension

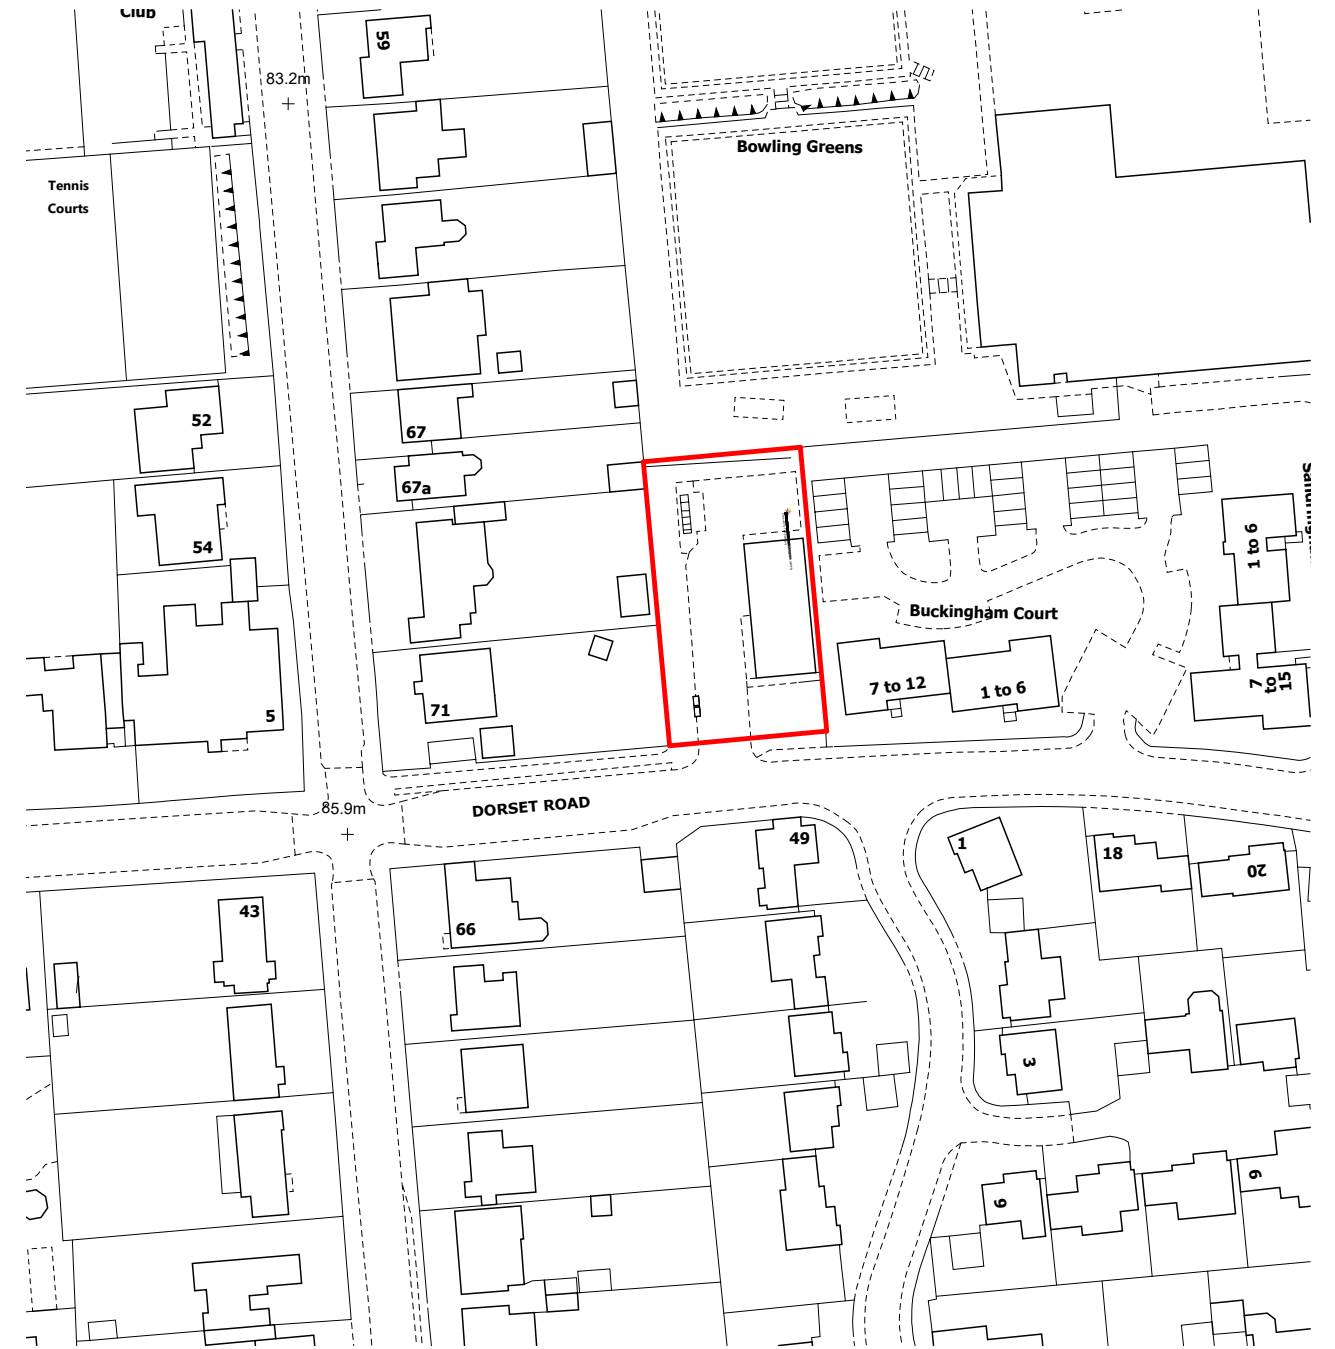

3 Site Location plan
1 : 1250

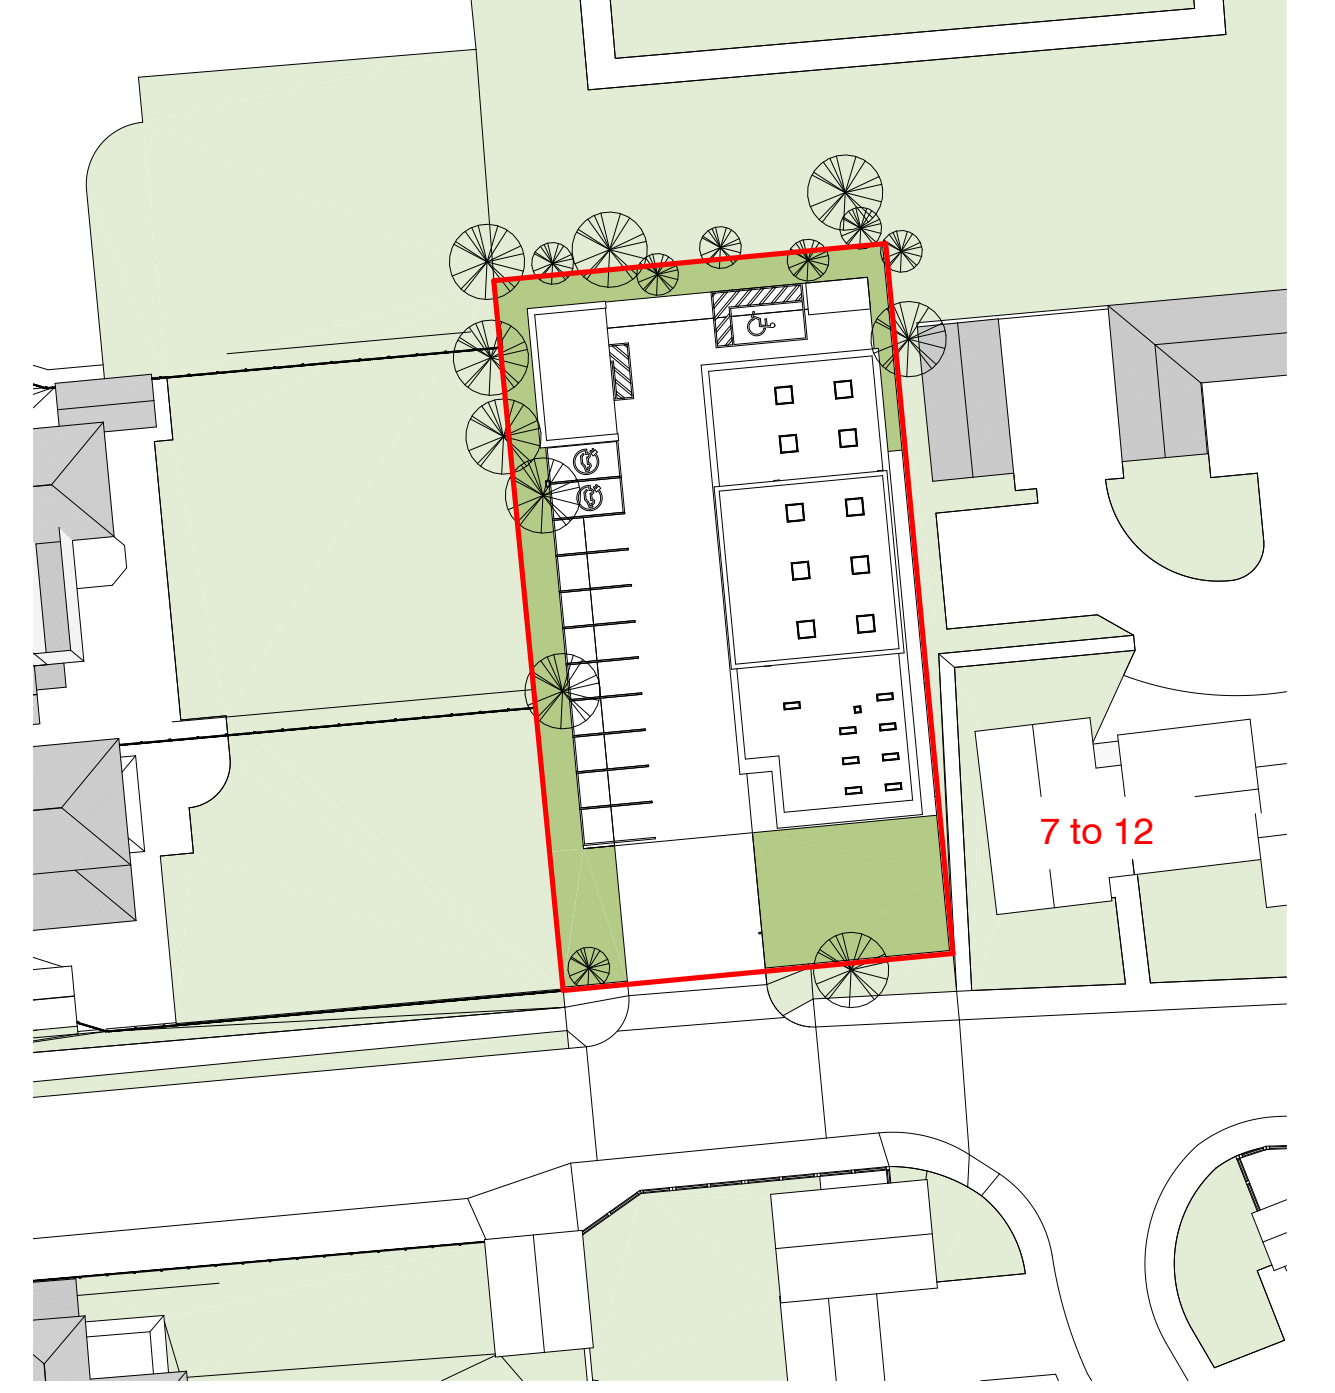

2 Block Plan
1 : 500



Pre App Submission

THE TRUSTEES
BASMA

For:

Project: CHANGE OF USE FROM
SUI-GENRIS TO USE CLASS F1&F2

Date: 29/05/25

Address: SUTTON AMBULANCE STATION, DORSET
ROAD, SUTTON, LONDON, SM2 6JH

Drawn by: MA / OI

Drawing num: 786/BASMA/PP -200

Rev:

Office 3 (Ground floor) 679-691 High Road, Leyton, London E10 6RA

Tel: 020 8558 4272

Appendix B

LBS Pre-Application Report

Application No: PRE2025/00079
Report Date: 28th August 2025



To: Umair Waheed

Applicant: Hassan Shirwani

Unit 3
679-691 High Road Leyton
Leyton
E10 6RA

4C Upper Mulgrave Road
Cheam
SM2 7AZ

Dear Umair Waheed

Thank you for submitting your pre-application to the London Borough of Sutton validated on 10th June 2025. This letter provides the Council's formal response to your proposal following the meeting held on 8th August 2025.

Address: Ambulance Station Dorset Road Belmont SM2 6JH

Ward: Belmont

Proposal: Change of use from Use Class Sui Generis (ambulance station) to Mixed Use Classes F.1 (place of worship) and F.2 (community hub) including the erection of a single storey side and rear extension and provision of a partial first floor.

Case Officer: Polly Davidson

Relevant Site History

Planning Application Reference: 80/21274--- Address: Belmont Hospital Land, Brighton Road--- Proposal: Residential development at 70 h.r.p.a. with new access road and provision for community centre, school playing field, primary school & public open space--- Status: GTD--- Decision: GTD--- Date Decision Issued: 18-NOV-80---

Planning Application Reference: 8527700A--- Address: Sutton Bowling Club Dorset Road Sutton SM2 6JA--- Proposal: Display of non-illuminated directional sign 96-4-53--- Status: GTD--- Decision: GTD--- Date Decision Issued: 30-APR-85---

Planning Application Reference: 68/4456--- Address: Ambulance Station Dorset Road Belmont SM2--- Proposal: Erection of ambulance station 42-3-30--- Status: GTD--- Decision: GTD--- Date Decision Issued: 11-DEC-68---

Planning Application Reference: 77/17209--- Address: Belmont Hospital, Brighton Road, Sutton--- Proposal: Use of approximately 48 acres for residential purposes, community facilities, primary school, public open space and a school playing field with access from Dorset Road and Hulverstone Close--- Status: WDN--- Decision: WDN--- Date Decision Issued: ---

Site Specific Designations

Article 4s	Article 4 Direction - Boroughwide HMO Restriction
Smoke Control Orders	Smoke Control Zone
TPO Polygons Uniform Database	Ref: 145 - Status: CONF
TPO Polygons Uniform Database	Ref: 145 - Status: CONF
TPO Polygons Uniform Database	Ref: 145 - Status: CONF

MATERIAL PLANNING POLICIES

Section 38(6) of the Planning and Compulsory Purchase Act 2004 states that when determining a planning application, regard is to be had to the development plan, and the determination shall be made in accordance with the development plan, unless material considerations indicate otherwise. The development plan for the London Borough of Sutton comprises the following documents:

- The London Plan 2021
- The Sutton Local Plan 2018

Also a material consideration in determining planning applications are:

- National Planning Policy Framework 2024 (NPPF)
- National Planning Practice Guidance (NPPG)
- Adopted London Borough of Sutton Supplementary Planning Documents
- Human Rights Act 1998
- Equality Act 2010

London Plan 2021 Policies :

GG1 Building strong and inclusive communities
GG2 Making the best use of land
D1 London's form, character and capacity for growth
D3 Optimising site capacity through design-led approach
D4 Delivery good design
D5 Inclusive design

D12 Fire Safety
D14 Noise
S1 Developing London's social infrastructure
G6 Biodiversity and access to nature
G7 Trees and Woodlands
SI 2 Minimising greenhouse gas emissions
SI 4 Managing heat risk
SI 5 Water infrastructure
SI 8 Waste capacity and net waste self-sufficiency
SI 12 Flood risk management
SI 13 Sustainable drainage
T3 Transport capacity, connectivity and safeguarding
T4 Assessing and mitigating transport impact
T5 Cycling
T6 Car parking
T6.5 Non-residential disabled persons parking
T7 Deliveries, servicing and construction

Sutton Local Plan 2018 Policies :

1 Sustainable Growth
22 Social and community infrastructure, including public houses
26 Biodiversity
28 Character and Design
29 Protecting Amenity
31 Carbon and Energy
32 Flood Risk and Sustainable Drainage
33 Climate Change Adoptions
34 Environmental Protection
36 Transport Impact
37 Parking

Supplementary Planning Documents :

SPD 14 Creating Locally Distinctive Places 'Urban Design'

Principle

Principle:

The NPPF requires the Council to promote an effective use of land in meeting the need for homes and other uses, while safeguarding and improving the environment and ensuring safe and healthy living conditions. It states that strategic policies should set out a clear strategy for accommodating objectively assessed needs, in a way that makes as much use as possible of previously-developed or 'brownfield' land. It goes further in stating that decisions should encourage multiple benefits from urban land, including through mixed use schemes and taking opportunities to achieve net environmental gains.

The London Plan 2021 encourages intensification and optimising of land subject to justification within the local context.

Policy S1 of the London Plan states that social infrastructure plays an important role in developing strong and inclusive communities. It can provide opportunities to bring different groups of people together, contributing to social integration and the desirability of a place.

Policy HC5 of the London Plan aims to protect existing cultural venues, facilities and uses where appropriate and support the development of new cultural venues in town centres and places with good public transport connectivity.

This application seeks pre-application advice for the change of use of the former Sutton Ambulance Station, Dorset Road, Belmont (Use Class Sui Generis), into a mixed-use Community Hub and Place of Worship (Use Classes F.1 and F.2), to be delivered by the Belmont and Sutton Muslim Assembly (BASMA).

The proposed development will, according to the applicants:

- Provide a permanent base for spiritual, social, educational, and interfaith activities
- Introduce dedicated facilities for women, elderly users, and families currently underserved by existing provision
- Reduce pressure on over-capacity religious centres elsewhere in the borough.
- Promote active travel, inclusive access, and modal shift via well-connected walking routes and hail-and-ride bus services.
- Deliver biodiversity uplift and urban greening measures in line with BNG obligations and Policies 26 & 33 of the Sutton Local Plan.

Policy 22 of the Sutton Local Plan states that the council will grant planning permission for the development of social and community infrastructure (as defined in the glossary, including places of worship and community / cultural facilities such as proposed) where it:

- (i) is accessible by a range of transport modes, in particular by walking, cycling and public transport.
- (ii) provides flexible and adaptable space, where practicable.
- (iii) is close to or accessible to the community it is intended to serve and is of a suitable scale to meet that need.
- (iv) is designed and sited to enable the shared use of premises and playing fields for community purposes.
- (v) would not have any adverse environmental effects.
- (vi) in the case of proposals for large developments generating significant numbers of trips, such as indoor sports facilities, are located within or on the edge of town centres or other areas of higher public transport accessibility.

The site has a low PTAL rating of 1a which means there is extremely poor access to this location by public transport. This is a concern expressed in the relevant section below.

It is evident that the proposed use of the site broadly complies with the aims set out within Policies S1 and HC5 of the London Plan, and taking into consideration Policy 22 of the Sutton Local Plan, it is considered that, from the supporting information provided, the proposal provides flexible and adaptable space, where practicable, is close to or accessible to the community it is intended to serve and is of a suitable scale to meet that need. It is designed and sited to enable the shared use of premises for community purposes, all of which is welcomed by Sutton Council.

Whilst the principle of the change of use of this redundant ambulance station is supported, the success of any future planning application will also depend on compliance with all other relevant national and local planning policies.

Design & Townscape

Design and Townscape:

The London Plan encourages intensification of sites subject to exceptional design and architectural quality, relationship to its local context and attention to the public realm. In particular, Policy 28 of the Sutton Local Plan and SPD14 'Urban Design Guide' along with National policy requires development to respect or reinforce the character and identity of the area and avoid developments which do not integrate well into the surroundings.

- o The proposal involves the extension and refurbishment of the existing building with a single storey extension to the north and the western side of the building. The proposal also includes the increase in height of the building to create a central prayer hall. It is noted that any windows in this upper part of the building should be obscure glazed to ensure that there is no perceived overlooking to neighbours. It is noted that the intention is to create a central men's prayer hall that has height rather than adding an additional floor. It is likely to be a condition of any future application that no internal mezzanine floors can be added to the building.

- o Internally, the building will comprise a flexible prayer and community use space, separated by folding partitions, toilet and wash room facilities, kitchens and office space.

- o Modest external works at the site will also include resurfacing, a new parking layout, enhanced boundary treatments, and provision of cycle storage and refuse facilities.

- o The submitted Design and Access statement sets out a couple of options for the external treatment of the extended building. You are advised that Option A appears to be the most successful as it is considered that the dark timber and red brickwork would compliment the surrounding development. The vertical window pattern and brick detailing would appear to create a visually attractive building, improving on the existing situation.

- o Externally, you are advised to incorporate soft landscaping features where possible and any new hard standing should be porous to reduce surface water flooding.

The proposed building is considered to be an acceptable design, external materials could be conditioned on any future planning application.

Impact on Neighbours

Impact on Neighbours:

In accordance with policy 29 of the Sutton Local Plan, the council will not grant planning permission for any development that adversely affects the privacy, outlook or daylight and sunlight of adjoining occupiers, or would create unacceptable noise and vibration levels and the council will take into consideration times when such disturbances are likely to occur.

- o Given the location of this site, there are a number of residential properties surrounding the site. The surrounding area is predominantly residential.

- o To the east of the site is a flatted development known as Buckingham Court, this development is in close proximity to the application site. It is noted that there are windows within the flank elevation facing the application site, however the section of the building to be increased in height should be a sufficient distance from these windows to prevent an unacceptable impact on outlook or daylight.

o The main properties to take into consideration to the west of the site are nos. 69 and 71 Holland Avenue. These two properties have private rear gardens adjoining the application site. Directly opposite the site are 66 Avenue Road and 49 Balmoral Way, both of which also need to be considered due to their proximity to the site.

o Whilst it is considered that the proposed change of use and extensions at the site are unlikely to result in a significant impact on the outlook, privacy or daylight currently enjoyed by the occupants of the surrounding properties. The Council does have concerns at this stage that the proposed change of use could result in raised noise and disturbance which could be significant within this residential setting. This is due to the coming and going of vehicles, which would be parked close to the rear gardens of the Holland Road properties, and from members of the community attending and leaving the site late in the evenings during busy events such as Friday prayer sessions.

o An example of the events likely to take place at the community centre has been provided and whilst the majority of these planned activities will attract an acceptable amount of people and will be held at times of the day where disturbance to neighbours would be minimal, the Council are also aware that the busiest events will be Friday prayer sessions, which could attract up to 120 people and the centre would be open until 11pm. As it is not reasonable or practical to restrict the number of people attending Friday prayer, the Council will be looking at the worse case scenario, whereby the maximum capacity of the building could be reached, which is understood to be 250, and the latest time that events could take place which is currently proposed to be 11pm. At present the Council do have concerns about the noise and disturbance that would be caused in this residential area by 250 people leaving the site at 11pm. Please be aware that whilst the worse case scenario might not happen, at planning committee, officers are likely to be asked what the maximum number of people attending the building would be and what are the earliest and latest times of operation.

o A site visit would also be carried out to identify any impacts on neighbour amenity that are not evident at this stage.

Any future application will be assessed against Policy 29 of the Sutton Local Plan 2018.

Traffic & Parking

Traffic and Parking:

In accordance with Policies 35 and 36 of the Sutton Local Plan 2018, development proposals will be required to make appropriate provisions for sustainable transport modes and will be assessed for their impact on the existing and proposed transport infrastructure and services, and the local environment. Additionally, Policy 37 of the Sutton Local Plan 2018 requires development proposals to provide the appropriate amount of car parking and secure cycle storage in accordance with the council's restraint-based maximum car and cycle parking standards and to ensure the safe and efficient operation of the transport network.

The site has a PTAL rating of 1a, indicating a very poor level of public transport accessibility. However it is noted that Belmont Station is a short walk away from the site and a hail and ride bus operates from Holland Avenue.

The submitted plans indicate that off street parking would be provided on site for 10 vehicles, in addition to this there would be two electric vehicle charging spaces and two disabled badge holder spaces.

Cycle parking is also shown on the plan, however the applicant is advised that the proposed location could be unsuitable as it could conflict with the disabled parking space, making it difficult for people to get bikes safely in and out of the cycle store. The cycle store should be covered and secure and full details should be submitted at application stage. Facilities such as showers and lockers should be provided to encourage cycle trips for both men and women.

The proposal by the applicant to conduct a parking survey to the Lambeth Methodology is welcomed. The undertaking to include the busiest time on a Friday is important, as the travel survey indicates that there will be a demand for approximately 21 on-street parking spaces at this time (assuming that all of the off-street parking spaces are occupied).

The plans provided indicate that the existing gated vehicular access will be retained. It would be beneficial in both safety and active travel terms if a dedicated pedestrian access could be provided to allow pedestrians to enter and exit the facilities away from manoeuvring vehicles.

The existing Dorset Road access 'Keep Clear' carriageway markings and accompanying sign in the footway will be made redundant by the proposals and should be removed at the applicant's expense.

Given that one of the big concerns that will be expressed by local residents will be the possible impact on on-street parking demand and highway safety at times when the centre is at its busiest (Friday prayer sessions), you are advised to provide robust evidence and surveys that demonstrate that the proposed use would not result in an unacceptable impact to the surrounding area in terms of parking pressure and highway safety implications. It should also be noted that there is a proposed strategic development at the London Cancer Hub and concerns have been raised by local residents in regards to parking in this area from that development as well.

In summary, there are no fundamental highways objections to the proposals at this stage; with a development of this scope and scale there is however the requirement for the applicant to progress standard supporting transport documents (to accompany any planning application); these include, but are not necessarily limited to: a Transport Assessment, Servicing and Delivery Plan, Construction Logistics Plan, Travel Plan.

Other

Sustainability - Drainage:

Paragraph 163 of the NPPF seeks that when determining any planning application, local planning authorities should ensure that flood risk is not increased elsewhere. Where appropriate, applications should be supported by a site specific flood risk assessment.

Policy SI 12 of the London Plan states that development proposals must comply with the flood risk assessment and management requirements set out in the NPPF and the associated technical guidance on flood risk over the lifetime of the development. Policy SI 13 of the London Plan states that new development should utilise sustainable urban drainage systems (SuDs) unless there are practical reasons for not doing so, and should aim to achieve greenfield run-off rates and ensure that surface water run-off is managed as close to its source as possible.

Furthermore Policy 32 of the Sutton Local Plan states that proposed developments should avoid or minimise all sources of flood risk to people and property, taking account of climate change, without increasing flood risk elsewhere. Policy 32 also states that development proposals should incorporate effective sustainable drainage (SuDS) measures as part of their design and layout in order to manage surface water run-off as close to its source as possible and to achieve the

minimum SuDS performance standards that are relevant to the development through application of the Mayor's drainage hierarchy.

Any future application should be accompanied by relevant surface water run-off calculations to demonstrate that peak run-off rates and volumes for the 1 in 100 year event achieve greenfield run-off rates for the same event, unless it can be demonstrated that all opportunities to minimise final site run-off, as close as reasonably practicable to greenfield runoff rates, have been taken in line with the Mayor's drainage hierarchy. In such cases, run-off rates must not exceed 3 times the calculated greenfield rate in accordance with the Mayor's Sustainable Design and Construction SPG. It should also be ensured that the site drainage strategy can contain the 1 in 30 year event (+ climate change) without flooding and that any flooding occurring between the 1 in 30 and 1 in 100 year event (+ climate change) will be safely contained on site.

Any formal planning application would be subject to consultation from the Council's Sustainability Officer and it should be noted that relevant SUD's / flooding details and water usage calculations would need to be submitted at application stage and will not be dealt with by condition.

Sustainability- Energy:

London Plan Policies SI 1 Improving air quality and SI 2 Minimising greenhouse gas emissions, have a general expectation that an Energy Statement is submitted for developments of varying scale. All planning applications for new dwellings or major non-residential developments should be supported by an Energy Statement incorporating 'as-designed' Building Regulations Part L outputs to demonstrate how the relevant targets for reducing CO2 emissions will be met. An Energy Statement demonstrating how these targets are to be met should be submitted with any application. The statement must incorporate 'as-designed' Building Regulations Part L outputs to demonstrate how the target for reducing CO2 emissions will be met. The Energy Statement should include calculations of energy demand and emissions at each stage of the Mayor's energy hierarchy for both regulated and non-regulated elements in line with GLA 'Guidance on Preparing Energy Assessments' as amended. Any shortfall in regulated CO2 emissions will need to be offset by a financial contribution which would be secured by legal agreement.

Policy 33 seeks to ensure new developments should achieve water efficiency measures and states that proposals should ensure that water use can be limited to 110 litres per person per day, evidence of this should be submitted with any future application.

There is therefore a need for an Energy Statement to be submitted as part of any subsequent planning application to show how the proposal would achieve a reduction in regulated CO2 emissions.

Sutton has declared a Climate Emergency and so it is imperative that officers are confident that in the absence of adequate details, the strategy to deal with climate change policies is set out in order to ensure that any condition placed on a development is capable of being complied with. It is not considered acceptable to leave matters for later approval by condition when the Council has no clear understanding of how you intend to meet the requirements of policy and be able to comply with the relevant conditions. The Sustainability Officer needs to be shown that the proposal will be sustainable at the decision making stage.

Trees and Landscaping:

In accordance with Policy 28 of the Sutton Local Plan 2018, new developments will be expected to respect and retain existing landforms and natural features of application sites, including trees of

amenity value, hedges and other landscape features, and make suitable provision for high quality additional landscaping.

Photos and images of the site appear to show that there are significant mature trees and planting within the site which could be of high amenity value. These trees appear to be located to the western and northern edge of the site, at application stage, if any of the existing soft landscape strip along the western boundary of the site is to be reduced to accommodate the proposed parking on site, full details of this should be submitted together with details of the root protection areas of the existing trees at the site.

Any future proposal should not result in the loss or harm of any trees or landscaping features that currently contribute to the amenity of the surrounding area, root protection areas should be carefully considered. A full arboricultural survey and report should be submitted with any future application.

Biodiversity:

The application appears to result in the loss of some soft landscaping at the site as part of the proposal, a Report of Biodiversity Net Gain Calculation, Preliminary Ecological Appraisal and Preliminary Roost Assessment together with drawings showing indicative locations of bird boxes and other wildlife features should be submitted with any future application.

Biodiversity Net Gain is mandatory under Schedule 7A of the Town and Country Planning Act 1990 (as inserted by Schedule 14 of the Environment Act 2021). Developers must deliver a BNG of 10%. This means a development will result in more or better quality natural habitat than there was before development. More information can be found using the following link:
<https://www.gov.uk/guidance/understanding-biodiversity-net-gain>

A condition would be required to secure the wildlife features on site and a condition requiring a statement of conformity to enhance the biodiversity value of the land in accordance with Policy 26 of the Sutton Local Plan 2018.

Fire Safety Statement :

Following the publication of the London Plan in March 2021 all applications are required to meet the highest standards of fire safety. As part of any future application, fire safety information will have to be submitted to accord with policy D12a of the London Plan.

Making an Application

The [Planning Portal](#) explains how to apply for planning permission.

To enable us to consider your proposal, you must submit the correct application form, fee and include the necessary drawings and supporting information as contained within the [LBS Local Validation List](#).

Building Regulations

Please note that you may also require approval under the Building Regulations. If you are in any doubt about this you can get further information via <http://www.sutton.gov.uk/buildingcontrol> or by emailing buildingcontrol@sutton.gov.uk.

Community Infrastructure Levy (CIL)

Please note that new developments often attract a CIL charge, this is usually on extensions over 100sqm in floor area or any development which creates new units but can also fall upon conversions. Further reading can be found here;

Sutton CIL – www.sutton.gov.uk/cil

Mayor CIL - <https://www.gov.uk/guidance/community-infrastructure-levy>

Questions in relation to CIL should be sent to planningobligations@sutton.gov.uk

Conclusion

It is concluded that this pre-application submission for the Change of Use of the former Sutton Ambulance Station (Sui Generis), Dorset Road, into a mixed-use Community Hub and Place of Worship (Use Classes F.1 and F.2), is likely to be acceptable in principle, however at this pre-application stage, as detailed above, the Council do have concerns regarding the noise and disturbance that could be caused to the surrounding residents and the impact that the proposal could have on the parking situation within the surrounding streets during the busiest events at the centre.

Whilst it is proposed that many of the community sessions that would take place at the centre would have a limited amount of people attending, it is evident that the proposed building could have a high maximum capacity, and is likely to attract a significant number of people from the surrounding community for certain events, whilst it would not be reasonable or effective to restrict the number of people that could attend, the hours of use could be limited to ensure that levels of disturbance to neighbours could be minimised, this is an issue you will need to consider prior to making an application.

As mentioned during our meeting, you are strongly advised prior to the submission of any application, to engage with local residents and groups within the local area as this will help provide reassurance to those residents that might need more information regarding the proposed community use and provide BASMA with links that will assist in achieving the multi use of the community centre and establish good strong relationships.



Sarah Buxton
Area Planning Manager

We provide these views and opinions in good faith and without prejudice to formal consideration of any planning application, which will be subject to formal consultation and ultimately decided by the Council. We cannot guarantee that any application made would be valid or would be approved. If there is a material change in circumstance or new information comes to light then less weight might be given to this document.

Development Management, Planning Department, Civic Offices, St Nicholas Way, Sutton SM1 1EA

Email: developmentmanagement@sutton.gov.uk

Phone: 020 8770 5000

Web: www.sutton.gov.uk/planning

Appendix C

Job ID	Project Name	Survey Type	Survey Dates	Survey Days	Survey Timings	Weather 0030hrs	Weather 1000hrs	Weather 1200hrs	Weather 1300hrs
IW0451	Dorset Road, Sutton	Parking Beats	01/10/2025	Wednesday	Beat once in between 0030 and 0530hrs	Dry	-	-	-
			02/10/2025	Thursday	Beat once in between 0030 and 0530hrs	Dry	-	-	-
			03/10/2025	Friday	Beat once at 1000, 1200 and 1300hrs	-	Dry	Dry	Dry





Project ID and Name: IW0451 Dorset Road, Sutton
Survey Type: Parking Beats

ID	Street Name	Parking Restriction	Length (mts)	Bays / Vertical / horizontal	Parking Capacity (mts)	Parking Capacity (Round down)	Comments
Start of Dorset Road from Belmont Rise							
2	Dorset Road	Pedestrian Crossing	5.1	Horizontal	1.02	1	
3	Dorset Road	Double Red Lines	3.5	Horizontal	0.7	0	
4	Dorset Road	Drop Kerb	7.3	Horizontal	1.46	1	
5	Dorset Road	Double Red Lines	22.3	Horizontal	4.46	4	
6	Dorset Road	Drop Kerb	5.5	Horizontal	1.1	1	
7	Dorset Road	Double Red Lines	4	Horizontal	0.8	0	
8	Dorset Road	Drop Kerb	6.6	Horizontal	1.32	1	
9	Dorset Road	Double Red Lines	7	Horizontal	1.4	1	
10	Dorset Road	Unrestricted (No Lines)	14.4	Horizontal	2.88	2	
11	Dorset Road	Double Yellow Lines	11.4	Horizontal	2.28	2	
Turn left into York Road							
13	York Road	Pedestrian Crossing	3.2	Horizontal	0.64	0	
14	York Road	Double Yellow Lines	10.1	Horizontal	2.02	2	
15	York Road	Bus Stop	17.9	Horizontal	3.58	3	
16	York Road	Unrestricted (No Lines)	3	Horizontal	0.6	0	
17	York Road	Drop Kerb	10.3	Horizontal	2.06	2	
18	York Road	Unrestricted (No Lines)	7.5	Horizontal	1.5	1	
19	York Road	Drop Kerb	5.5	Horizontal	1.1	1	
20	York Road	Unrestricted (No Lines)	1.9	Horizontal	0.38	0	
21	York Road	Drop Kerb	5.7	Horizontal	1.14	1	
22	York Road	Unrestricted (No Lines)	1.7	Horizontal	0.34	0	
23	York Road	Drop Kerb	9.4	Horizontal	1.88	1	
24	York Road	Unrestricted (No Lines)	11.3	Horizontal	2.26	2	
25	York Road	Drop Kerb	10.4	Horizontal	2.08	2	
26	York Road	Unrestricted (No Lines)	7.6	Horizontal	1.52	1	
27	York Road	Drop Kerb	11.3	Horizontal	2.26	2	
28	York Road	Unrestricted (No Lines)	4.7	Horizontal	0.94	0	
29	York Road	Drop Kerb	5.1	Horizontal	1.02	1	
30	York Road	Unrestricted (No Lines)	11.4	Horizontal	2.28	2	
31	York Road	Drop Kerb	5.6	Horizontal	1.12	1	
32	York Road	Unrestricted (No Lines)	18	Horizontal	3.6	3	
33	York Road	Drop Kerb	6.1	Horizontal	1.22	1	
34	York Road	Unrestricted (No Lines)	16	Horizontal	3.2	3	
35	York Road	Drop Kerb	10.1	Horizontal	2.02	2	
36	York Road	Unrestricted (No Lines)	6.6	Horizontal	1.32	1	
37	York Road	Drop Kerb	4.8	Horizontal	0.96	0	
38	York Road	Unrestricted (No Lines)	10.5	Horizontal	2.1	2	
39	York Road	Drop Kerb	9.6	Horizontal	1.92	1	
40	York Road	Unrestricted (No Lines)	8.4	Horizontal	1.68	1	
41	York Road	Drop Kerb	4.9	Horizontal	0.98	0	
42	York Road	Unrestricted (No Lines)	1.4	Horizontal	0.28	0	
43	York Road	Drop Kerb	4.4	Horizontal	0.88	0	
44	York Road	Unrestricted (No Lines)	13.4	Horizontal	2.68	2	
45	York Road	Drop Kerb	9.9	Horizontal	1.98	1	
46	York Road	Unrestricted (No Lines)	12.2	Horizontal	2.44	2	
47	York Road	Drop Kerb	5.4	Horizontal	1.08	1	
48	York Road	Unrestricted (No Lines)	14.3	Horizontal	2.86	2	
49	York Road	Drop Kerb	11.4	Horizontal	2.28	2	
50	York Road	Unrestricted (No Lines)	8.5	Horizontal	1.7	1	
51	York Road	Drop Kerb	4.8	Horizontal	0.96	0	
52	York Road	Unrestricted (No Lines)	11.4	Horizontal	2.28	2	
53	York Road	Drop Kerb	11.5	Horizontal	2.3	2	
54	York Road	Unrestricted (No Lines)	5.8	Horizontal	1.16	1	
55	York Road	Drop Kerb	9.9	Horizontal	1.98	1	
56	York Road	Unrestricted (No Lines)	15	Horizontal	3	3	
57	York Road	Drop Kerb	11.3	Horizontal	2.26	2	
58	York Road	Unrestricted (No Lines)	9.5	Horizontal	1.9	1	
59	York Road	Drop Kerb	10.3	Horizontal	2.06	2	
60	York Road	Unrestricted (No Lines)	5.8	Horizontal	1.16	1	
61	York Road	Drop Kerb	8.6	Horizontal	1.72	1	
62	York Road	Unrestricted (No Lines)	6.7	Horizontal	1.34	1	
63	York Road	Drop Kerb	8.8	Horizontal	1.76	1	
64	York Road	Unrestricted (No Lines)	6.6	Horizontal	1.32	1	
65	York Road	Drop Kerb	4.7	Horizontal	0.94	0	
66	York Road	Unrestricted (No Lines)	12.3	Horizontal	2.46	2	
67	York Road	Drop Kerb	9.7	Horizontal	1.94	1	
68	York Road	Unrestricted (No Lines)	6.1	Horizontal	1.22	1	
69	York Road	Drop Kerb	12.9	Horizontal	2.58	2	
70	York Road	Unrestricted (No Lines)	11.2	Horizontal	2.24	2	
71	York Road	Drop Kerb	9.4	Horizontal	1.88	1	
Outside of York Road from H. No. 33							
73	York Road	Unrestricted (No Lines)	6.3	Horizontal	1.26	1	
74	York Road	Drop Kerb	9.7	Horizontal	1.94	1	
75	York Road	Unrestricted (No Lines)	6.5	Horizontal	1.3	1	
76	York Road	Drop Kerb	11.7	Horizontal	2.34	2	
77	York Road	Unrestricted (No Lines)	7	Horizontal	1.4	1	
78	York Road	Drop Kerb	4.6	Horizontal	0.92	0	
79	York Road	Unrestricted (No Lines)	2	Horizontal	0.4	0	
80	York Road	Drop Kerb	5.7	Horizontal	1.14	1	
81	York Road	Unrestricted (No Lines)	5.7	Horizontal	1.14	1	
82	York Road	Drop Kerb	8.5	Horizontal	1.7	1	
83	York Road	Unrestricted (No Lines)	4.7	Horizontal	0.94	0	
84	York Road	Drop Kerb	11	Horizontal	2.2	2	
85	York Road	Unrestricted (No Lines)	6.7	Horizontal	1.34	1	
86	York Road	Drop Kerb	4.7	Horizontal	0.94	0	
87	York Road	Unrestricted (No Lines)	2	Horizontal	0.4	0	
88	York Road	Drop Kerb	5.1	Horizontal	1.02	1	
89	York Road	Unrestricted (No Lines)	4.8	Horizontal	0.96	0	
90	York Road	Drop Kerb	20.7	Horizontal	4.14	4	
91	York Road	Unrestricted (No Lines)	15.1	Horizontal	3.02	3	
92	York Road	Drop Kerb	5.2	Horizontal	1.04	1	
93	York Road	Unrestricted (No Lines)	5.3	Horizontal	1.06	1	
94	York Road	Drop Kerb	5.5	Horizontal	1.1	1	
95	York Road	Unrestricted (No Lines)	4.3	Horizontal	0.86	0	
96	York Road	Drop Kerb	4.9	Horizontal	0.98	0	
97	York Road	Unrestricted (No Lines)	9	Horizontal	1.8	1	
98	York Road	Drop Kerb	10.4	Horizontal	2.08	2	
99	York Road	Unrestricted (No Lines)	3.8	Horizontal	0.76	0	
100	York Road	Drop Kerb	10.4	Horizontal	2.08	2	
101	York Road	Unrestricted (No Lines)	8.4	Horizontal	1.68	1	
102	York Road	Drop Kerb	4.8	Horizontal	0.96	0	
103	York Road	Unrestricted (No Lines)	11.3	Horizontal	2.26	2	
104	York Road	Drop Kerb	5.7	Horizontal	1.14	1	
105	York Road	Unrestricted (No Lines)	7.7	Horizontal	1.54	1	
106	York Road	Drop Kerb	5	Horizontal	1	1	
107	York Road	Unrestricted (No Lines)	12.2	Horizontal	2.44	2	
108	York Road	Drop Kerb	6.3	Horizontal	1.26	1	
109	York Road	Unrestricted (No Lines)	7.5	Horizontal	1.5	1	



Project ID and Name: IW0451 Dorset Road, Sutton
Survey Type: Parking Beats

ID	Street Name	Parking Restriction	Length (mts)	Bays / Vertical / horizontal	Parking Capacity (mts)	Parking Capacity (Round down)	Comments
110	York Road	Drop Kerb	5.3	Horizontal	1.06	1	
111	York Road	Unrestricted (No Lines)	9.4	Horizontal	1.88	1	
112	York Road	Drop Kerb	8.7	Horizontal	1.74	1	
113	York Road	Unrestricted (No Lines)	7.6	Horizontal	1.52	1	
114	York Road	Drop Kerb	13.1	Horizontal	2.62	2	
115	York Road	Unrestricted (No Lines)	5.7	Horizontal	1.14	1	
116	York Road	Drop Kerb	13.1	Horizontal	2.62	2	
117	York Road	Unrestricted (No Lines)	8.4	Horizontal	1.68	1	
118	York Road	Drop Kerb	7.3	Horizontal	1.46	1	
119	York Road	Unrestricted (No Lines)	3.9	Horizontal	0.78	0	
120	York Road	Drop Kerb	4.7	Horizontal	0.94	0	
121	York Road	Unrestricted (No Lines)	11.4	Horizontal	2.28	2	
122	York Road	Drop Kerb	5.3	Horizontal	1.06	1	
123	York Road	Unrestricted (No Lines)	3.8	Horizontal	0.76	0	
124	York Road	Drop Kerb	5	Horizontal	1	1	
125	York Road	Unrestricted (No Lines)	10.2	Horizontal	2.04	2	
126	York Road	Drop Kerb	11.3	Horizontal	2.26	2	
127	York Road	Unrestricted (No Lines)	3	Horizontal	0.6	0	
128	York Road	Drop Kerb	9.3	Horizontal	1.86	1	
129	York Road	Unrestricted (No Lines)	10.4	Horizontal	2.08	2	
130	York Road	Drop Kerb	5.7	Horizontal	1.14	1	
131	York Road	Unrestricted (No Lines)	9.5	Horizontal	1.9	1	
132	York Road	Drop Kerb	9.8	Horizontal	1.96	1	
133	York Road	Unrestricted (No Lines)	7.8	Horizontal	1.56	1	
134	York Road	Drop Kerb	5.3	Horizontal	1.06	1	
135	York Road	Unrestricted (No Lines)	5.7	Horizontal	1.14	1	
136	York Road	Drop Kerb	5.3	Horizontal	1.06	1	
137	York Road	Double Yellow Lines	21	Horizontal	4.2	4	
138	York Road	Pedestrian Crossing	2.9	Horizontal	0.58	0	
Turn left into Dorset Road							
140	Dorset Road	Double Yellow Lines	5.3	Horizontal	1.06	1	
141	Dorset Road	Narrow	3.9	Horizontal	0.78	0	Pedestrian Crossing
142	Dorset Road	Narrow	5.7	Horizontal	1.14	1	Double Yellow Lines
143	Dorset Road	Double Yellow Lines	5.6	Horizontal	1.12	1	
144	Dorset Road	Unrestricted (No Lines)	22.5	Horizontal	4.5	4	
145	Dorset Road	Drop Kerb	13.3	Horizontal	2.66	2	
146	Dorset Road	Unrestricted (No Lines)	8.5	Horizontal	1.7	1	
147	Dorset Road	Drop Kerb	5.7	Horizontal	1.14	1	
148	Dorset Road	Unrestricted (No Lines)	7.6	Horizontal	1.52	1	
149	Dorset Road	Drop Kerb	5.6	Horizontal	1.12	1	
150	Dorset Road	Unrestricted (No Lines)	5	Horizontal	1	1	
151	Dorset Road	Double Yellow Lines	10.6	Horizontal	2.12	2	
152	Dorset Road	Pedestrian Crossing	3.1	Horizontal	0.62	0	
Turn left into Holland Avenue							
154	Holland Avenue	Pedestrian Crossing	6.5	Horizontal	1.3	1	
155	Holland Avenue	Drop Kerb	7.5	Horizontal	1.5	1	
156	Holland Avenue	Double Yellow Lines	17.3	Horizontal	3.46	3	
157	Holland Avenue	Drop Kerb	8	Horizontal	1.6	1	
158	Holland Avenue	Unrestricted (No Lines)	3.2	Horizontal	0.64	0	
159	Holland Avenue	Drop Kerb	5.7	Horizontal	1.14	1	
160	Holland Avenue	Unrestricted (No Lines)	5.1	Horizontal	1.02	1	
161	Holland Avenue	Drop Kerb	9.1	Horizontal	1.82	1	
162	Holland Avenue	Unrestricted (No Lines)	6.2	Horizontal	1.24	1	
163	Holland Avenue	Drop Kerb	5.8	Horizontal	1.16	1	
164	Holland Avenue	Unrestricted (No Lines)	75.6	Horizontal	15.12	15	
165	Holland Avenue	Drop Kerb	5.7	Horizontal	1.14	1	
166	Holland Avenue	Unrestricted (No Lines)	8.4	Horizontal	1.68	1	
167	Holland Avenue	Drop Kerb	6.7	Horizontal	1.34	1	
168	Holland Avenue	Unrestricted (No Lines)	8.3	Horizontal	1.66	1	
169	Holland Avenue	Drop Kerb	11.4	Horizontal	2.28	2	
170	Holland Avenue	Unrestricted (No Lines)	2.8	Horizontal	0.56	0	
171	Holland Avenue	Drop Kerb	11.4	Horizontal	2.28	2	
172	Holland Avenue	Unrestricted (No Lines)	15.1	Horizontal	3.02	3	
173	Holland Avenue	Drop Kerb	9.3	Horizontal	1.86	1	
174	Holland Avenue	Unrestricted (No Lines)	15	Horizontal	3	3	
175	Holland Avenue	Drop Kerb	16.1	Horizontal	3.22	3	
176	Holland Avenue	Unrestricted (No Lines)	6.7	Horizontal	1.34	1	
177	Holland Avenue	Drop Kerb	11.7	Horizontal	2.34	2	
178	Holland Avenue	Unrestricted (No Lines)	9.5	Horizontal	1.9	1	
179	Holland Avenue	Drop Kerb	10.4	Horizontal	2.08	2	
180	Holland Avenue	Unrestricted (No Lines)	6.3	Horizontal	1.26	1	
181	Holland Avenue	Drop Kerb	11	Horizontal	2.2	2	
182	Holland Avenue	Unrestricted (No Lines)	12.2	Horizontal	2.44	2	
183	Holland Avenue	Drop Kerb	4.8	Horizontal	0.96	0	
184	Holland Avenue	Unrestricted (No Lines)	4.8	Horizontal	0.96	0	
185	Holland Avenue	Drop Kerb	4.9	Horizontal	0.98	0	
186	Holland Avenue	Unrestricted (No Lines)	11.4	Horizontal	2.28	2	
187	Holland Avenue	Drop Kerb	4.7	Horizontal	0.94	0	
188	Holland Avenue	Unrestricted (No Lines)	5.6	Horizontal	1.12	1	
189	Holland Avenue	Drop Kerb	10.7	Horizontal	2.14	2	
190	Holland Avenue	Unrestricted (No Lines)	12.4	Horizontal	2.48	2	
191	Holland Avenue	Drop Kerb	6.5	Horizontal	1.3	1	
192	Holland Avenue	Unrestricted (No Lines)	6.3	Horizontal	1.26	1	
193	Holland Avenue	Drop Kerb	12	Horizontal	2.4	2	
194	Holland Avenue	Unrestricted (No Lines)	2.5	Horizontal	0.5	0	
195	Holland Avenue	Drop Kerb	11.7	Horizontal	2.34	2	
196	Holland Avenue	Unrestricted (No Lines)	15.9	Horizontal	3.18	3	
197	Holland Avenue	Drop Kerb	4.8	Horizontal	0.96	0	
198	Holland Avenue	Unrestricted (No Lines)	4.8	Horizontal	0.96	0	
199	Holland Avenue	Drop Kerb	16	Horizontal	3.2	3	
200	Holland Avenue	Unrestricted (No Lines)	9.4	Horizontal	1.88	1	
201	Holland Avenue	Drop Kerb	6.6	Horizontal	1.32	1	
202	Holland Avenue	Unrestricted (No Lines)	29	Horizontal	5.8	5	
203	Holland Avenue	Drop Kerb	5.3	Horizontal	1.06	1	
204	Holland Avenue	Unrestricted (No Lines)	14.1	Horizontal	2.82	2	
205	Holland Avenue	Drop Kerb	5.3	Horizontal	1.06	1	
206	Holland Avenue	Unrestricted (No Lines)	21.1	Horizontal	4.22	4	
Otherside of Holland Avenue Sackville Road							
208	Holland Avenue	Double Yellow Lines	7.6	Horizontal	1.52	1	
209	Holland Avenue	Unrestricted (No Lines)	9.7	Horizontal	1.94	1	
210	Holland Avenue	Drop Kerb	9	Horizontal	1.8	1	
211	Holland Avenue	Unrestricted (No Lines)	6.2	Horizontal	1.24	1	
212	Holland Avenue	Drop Kerb	10.1	Horizontal	2.02	2	
213	Holland Avenue	Unrestricted (No Lines)	7.8	Horizontal	1.56	1	
214	Holland Avenue	Drop Kerb	9.1	Horizontal	1.82	1	
215	Holland Avenue	Unrestricted (No Lines)	8.9	Horizontal	1.78	1	
216	Holland Avenue	Drop Kerb	9.5	Horizontal	1.9	1	
217	Holland Avenue	Unrestricted (No Lines)	8.4	Horizontal	1.68	1	



Project ID and Name: IW0451 Dorset Road, Sutton
Survey Type: Parking Beats

ID	Street Name	Parking Restriction	Length (mts)	Bays / Vertical / horizontal	Parking Capacity (mts)	Parking Capacity (Round down)	Comments
218	Holland Avenue	Drop Kerb	11.4	Horizontal	2.28	2	
219	Holland Avenue	Unrestricted (No Lines)	4.7	Horizontal	0.94	0	
220	Holland Avenue	Drop Kerb	13.3	Horizontal	2.66	2	
221	Holland Avenue	Unrestricted (No Lines)	3.3	Horizontal	0.66	0	
222	Holland Avenue	Drop Kerb	24.8	Horizontal	4.96	4	
223	Holland Avenue	Unrestricted (No Lines)	6.4	Horizontal	1.28	1	
224	Holland Avenue	Drop Kerb	5.5	Horizontal	1.1	1	
225	Holland Avenue	Unrestricted (No Lines)	5.3	Horizontal	1.06	1	
226	Holland Avenue	Drop Kerb	5.7	Horizontal	1.14	1	
227	Holland Avenue	Unrestricted (No Lines)	3.9	Horizontal	0.78	0	
228	Holland Avenue	Drop Kerb	5.3	Horizontal	1.06	1	
229	Holland Avenue	Unrestricted (No Lines)	5	Horizontal	1	1	
230	Holland Avenue	Drop Kerb	12.6	Horizontal	2.52	2	
231	Holland Avenue	Unrestricted (No Lines)	5.4	Horizontal	1.08	1	
232	Holland Avenue	Drop Kerb	6.2	Horizontal	1.24	1	
233	Holland Avenue	Unrestricted (No Lines)	12.3	Horizontal	2.46	2	
234	Holland Avenue	Drop Kerb	10.8	Horizontal	2.16	2	
235	Holland Avenue	Unrestricted (No Lines)	4.9	Horizontal	0.98	0	
236	Holland Avenue	Drop Kerb	5.2	Horizontal	1.04	1	
237	Holland Avenue	Unrestricted (No Lines)	8.4	Horizontal	1.68	1	
238	Holland Avenue	Drop Kerb	4.7	Horizontal	0.94	0	
239	Holland Avenue	Unrestricted (No Lines)	8	Horizontal	1.6	1	
240	Holland Avenue	Drop Kerb	10	Horizontal	2	2	
241	Holland Avenue	Unrestricted (No Lines)	15.4	Horizontal	3.08	3	
242	Holland Avenue	Drop Kerb	10.1	Horizontal	2.02	2	
243	Holland Avenue	Unrestricted (No Lines)	8.6	Horizontal	1.72	1	
244	Holland Avenue	Drop Kerb	4.8	Horizontal	0.96	0	
245	Holland Avenue	Unrestricted (No Lines)	2.2	Horizontal	0.44	0	
246	Holland Avenue	Drop Kerb	4.9	Horizontal	0.98	0	
247	Holland Avenue	Unrestricted (No Lines)	10.2	Horizontal	2.04	2	
248	Holland Avenue	Drop Kerb	5.2	Horizontal	1.04	1	
249	Holland Avenue	Unrestricted (No Lines)	12.2	Horizontal	2.44	2	
250	Holland Avenue	Drop Kerb	5.2	Horizontal	1.04	1	
251	Holland Avenue	Unrestricted (No Lines)	2.9	Horizontal	0.58	0	
252	Holland Avenue	Drop Kerb	4.6	Horizontal	0.92	0	
253	Holland Avenue	Unrestricted (No Lines)	5	Horizontal	1	1	
254	Holland Avenue	Drop Kerb	5.3	Horizontal	1.06	1	
255	Holland Avenue	Unrestricted (No Lines)	2.5	Horizontal	0.5	0	
256	Holland Avenue	Drop Kerb	4.7	Horizontal	0.94	0	
257	Holland Avenue	Unrestricted (No Lines)	6.5	Horizontal	1.3	1	
258	Holland Avenue	Drop Kerb	5.8	Horizontal	1.16	1	
259	Holland Avenue	Unrestricted (No Lines)	2.2	Horizontal	0.44	0	
260	Holland Avenue	Drop Kerb	4.6	Horizontal	0.92	0	
261	Holland Avenue	Unrestricted (No Lines)	14.5	Horizontal	2.9	2	
262	Holland Avenue	Drop Kerb	6.1	Horizontal	1.22	1	
263	Holland Avenue	Unrestricted (No Lines)	9.4	Horizontal	1.88	1	
264	Holland Avenue	Drop Kerb	6.2	Horizontal	1.24	1	
265	Holland Avenue	Unrestricted (No Lines)	8.4	Horizontal	1.68	1	
266	Holland Avenue	Drop Kerb	6.3	Horizontal	1.26	1	
267	Holland Avenue	Unrestricted (No Lines)	9.3	Horizontal	1.86	1	
268	Holland Avenue	Drop Kerb	4.9	Horizontal	0.98	0	
269	Holland Avenue	Unrestricted (No Lines)	11.9	Horizontal	2.38	2	
270	Holland Avenue	Drop Kerb	11.3	Horizontal	2.26	2	
271	Holland Avenue	Unrestricted (No Lines)	6.1	Horizontal	1.22	1	
272	Holland Avenue	Drop Kerb	6	Horizontal	1.2	1	
273	Holland Avenue	Unrestricted (No Lines)	8.5	Horizontal	1.7	1	
274	Holland Avenue	Drop Kerb	11.5	Horizontal	2.3	2	
275	Holland Avenue	Unrestricted (No Lines)	3.6	Horizontal	0.72	0	
276	Holland Avenue	Drop Kerb	5.4	Horizontal	1.08	1	
277	Holland Avenue	Unrestricted (No Lines)	9.5	Horizontal	1.9	1	
278	Holland Avenue	Drop Kerb	5.2	Horizontal	1.04	1	
279	Holland Avenue	Unrestricted (No Lines)	8.9	Horizontal	1.78	1	
280	Holland Avenue	Drop Kerb	7.2	Horizontal	1.44	1	
281	Holland Avenue	Double Yellow Lines	5	Horizontal	1	1	
282	Holland Avenue	Pedestrian Crossing	5.5	Horizontal	1.1	1	
Turn left into Dorset Road							
284	Dorset Road	Pedestrian Crossing	4.5	Horizontal	0.9	0	
285	Dorset Road	Double Yellow Lines	9	Horizontal	1.8	1	
286	Dorset Road	Drop Kerb	4.9	Horizontal	0.98	0	
287	Dorset Road	Double Yellow Lines	2	Horizontal	0.4	0	
288	Dorset Road	Unrestricted (No Lines)	24	Horizontal	4.8	4	
289	Dorset Road	Keep Clear	9.2	Horizontal	1.84	1	
290	Dorset Road	Drop Kerb	13.2	Horizontal	2.64	2	
291	Dorset Road	Keep Clear	8.3	Horizontal	1.66	1	
292	Dorset Road	Unrestricted (No Lines)	13.2	Horizontal	2.64	2	
293	Dorset Road	Drop Kerb	3	Horizontal	0.6	0	
294	Dorset Road	Unrestricted (No Lines)	15.9	Horizontal	3.18	3	
295	Dorset Road	Drop Kerb	3	Horizontal	0.6	0	
296	Dorset Road	Unrestricted (No Lines)	8.5	Horizontal	1.7	1	
Cross Access							
298	Dorset Road	Unrestricted (No Lines)	20.5	Horizontal	4.1	4	
299	Dorset Road	Double Yellow Lines	4.6	Horizontal	0.92	0	
Turn left into Bowling Way							
301	Bowling Way	Double Yellow Lines	11.2	Horizontal	2.24	2	
302	Bowling Way	Unrestricted (No Lines)	9	Horizontal	1.8	1	
303	Bowling Way	Drop Kerb	2.9	Horizontal	0.58	0	
304	Bowling Way	Unrestricted (No Lines)	17.8	Horizontal	3.56	3	
305	Bowling Way	Drop Kerb	3	Horizontal	0.6	0	
306	Bowling Way	Unrestricted (No Lines)	17.6	Horizontal	3.52	3	
Otherside of Bowling Way							
308	Bowling Way	Narrow	46.9	Horizontal	9.38	9	Unrestricted (No Lines)
309	Bowling Way	Narrow	17	Horizontal	3.4	3	Double Yellow Lines
Turn left into Dorset Road							
311	Dorset Road	Double Yellow Lines	6.2	Horizontal	1.24	1	
312	Dorset Road	Drop Kerb	6.1	Horizontal	1.22	1	
Continue into Brasted Close							
313	Brasted Close	Keep Clear	2.7	Horizontal	0.54	0	
314	Brasted Close	Double Yellow Lines	4.1	Horizontal	0.82	0	
315	Brasted Close	Drop Kerb	40.4	Horizontal	8.08	8	
316	Brasted Close	Unrestricted (No Lines)	4.9	Horizontal	0.98	0	
317	Brasted Close	Drop Kerb	15	Horizontal	3	3	
318	Brasted Close	Unrestricted (No Lines)	3	Horizontal	0.6	0	
319	Brasted Close	Drop Kerb	7.7	Horizontal	1.54	1	
320	Brasted Close	Unrestricted (No Lines)	6.7	Horizontal	1.34	1	
321	Brasted Close	Drop Kerb	14.1	Horizontal	2.82	2	
322	Brasted Close	Unrestricted (No Lines)	4	Horizontal	0.8	0	
323	Brasted Close	Drop Kerb	6.5	Horizontal	1.3	1	
324	Brasted Close	Unrestricted (No Lines)	3	Horizontal	0.6	0	
325	Brasted Close	Drop Kerb	8	Horizontal	1.6	1	



Project ID and Name: IW0451 Dorset Road, Sutton
Survey Type: Parking Beats

ID	Street Name	Parking Restriction	Length (mts)	Bays / Vertical / horizontal	Parking Capacity (mts)	Parking Capacity (Round down)	Comments
326	Brasted Close	Double Yellow Lines	4.6	Horizontal	0.92	0	
Otherside of Brasted Close							
328	Brasted Close	Drop Kerb	3.3	Horizontal	0.66	0	
329	Brasted Close	Unrestricted (No Lines)	2.2	Horizontal	0.44	0	
330	Brasted Close	Drop Kerb	15.1	Horizontal	3.02	3	
331	Brasted Close	Unrestricted (No Lines)	2.4	Horizontal	0.48	0	
332	Brasted Close	Drop Kerb	7.5	Horizontal	1.5	1	
333	Brasted Close	Unrestricted (No Lines)	3.8	Horizontal	0.76	0	
334	Brasted Close	Drop Kerb	6.5	Horizontal	1.3	1	
335	Brasted Close	Unrestricted (No Lines)	3	Horizontal	0.6	0	
336	Brasted Close	Drop Kerb	5.8	Horizontal	1.16	1	
337	Brasted Close	Double Yellow Lines	2.2	Horizontal	0.44	0	
338	Brasted Close	Drop Kerb	4.5	Horizontal	0.9	0	
Turn left into Sevenoaks Close							
340	Sevenoaks Close	Pedestrian Crossing	3.9	Horizontal	0.78	0	
341	Sevenoaks Close	Double Yellow Lines	7.4	Horizontal	1.48	1	
342	Sevenoaks Close	Unrestricted (No Lines)	14.2	Horizontal	2.84	2	
343	Sevenoaks Close	White Lines	4.7	Horizontal	0.94	0	
Otherside of Sevenoaks Close from Chiddingstone Close							
345	Sevenoaks Close	Narrow	26.3	Horizontal	5.26	5	Double Yellow Lines
346	Sevenoaks Close	Narrow	3.5	Horizontal	0.7	0	Pedestrian Crossing
Turn left into Brasted Close							
348	Brasted Close	Double Yellow Lines	5.9	Horizontal	1.18	1	
349	Brasted Close	Unrestricted (No Lines)	33.9	Horizontal	6.78	6	
350	Brasted Close	Double Yellow Lines	10.3	Horizontal	2.06	2	
Continue into Dorset Road							
351	Dorset Road	Keep Clear	2.6	Horizontal	0.52	0	
352	Dorset Road	Double Yellow Lines	28.3	Horizontal	5.66	5	
353	Dorset Road	Unrestricted (No Lines)	9.1	Horizontal	1.82	1	
354	Dorset Road	Drop Kerb	14	Horizontal	2.8	2	
355	Dorset Road	Unrestricted (No Lines)	30.4	Horizontal	6.08	6	
356	Dorset Road	Double Yellow Lines	3.7	Horizontal	0.74	0	
Turn left into Balmoral Way							
358	Balmoral Way	Narrow	5	Horizontal	1	1	Double Yellow Lines
359	Balmoral Way	Narrow	2.8	Horizontal	0.56	0	Pedestrian Crossing
360	Balmoral Way	Narrow	15	Horizontal	3	3	Double Yellow Lines
361	Balmoral Way	Narrow	12	Horizontal	2.4	2	Drop Kerb
362	Balmoral Way	Narrow	15.5	Horizontal	3.1	3	Unrestricted (No Lines)
363	Balmoral Way	Narrow	3.4	Horizontal	0.68	0	Double Yellow Lines
Turn left							
365	Balmoral Way	Pedestrian Crossing	4.5	Horizontal	0.9	0	
366	Balmoral Way	Double Yellow Lines	3.2	Horizontal	0.64	0	
367	Balmoral Way	Unrestricted (No Lines)	12.4	Horizontal	2.48	2	
Otherside							
369	Balmoral Way	Narrow	5.2	Horizontal	1.04	1	Drop Kerb
370	Balmoral Way	Narrow	12.6	Horizontal	2.52	2	Double Yellow Lines
371	Balmoral Way	Narrow	4.5	Horizontal	0.9	0	Pedestrian Crossing
Turn left							
373	Balmoral Way	Narrow	4.4	Horizontal	0.88	0	Drop Kerb
374	Balmoral Way	Narrow	17.6	Horizontal	3.52	3	Unrestricted (No Lines)
375	Balmoral Way	Narrow	19.7	Horizontal	3.94	3	Double Yellow Lines
376	Balmoral Way	Narrow	11.4	Horizontal	2.28	2	Drop Kerb
377	Balmoral Way	Narrow	6.1	Horizontal	1.22	1	Unrestricted (No Lines)
378	Balmoral Way	Narrow	4.1	Horizontal	0.82	0	Double Yellow Lines
Turn left							
380	Balmoral Way	Double Yellow Lines	2.9	Horizontal	0.58	0	
381	Balmoral Way	Pedestrian Crossing	2.7	Horizontal	0.54	0	
382	Balmoral Way	Double Yellow Lines	3	Horizontal	0.6	0	
383	Balmoral Way	Unrestricted (No Lines)	30.7	Horizontal	6.14	6	
384	Balmoral Way	Drop Kerb	4.3	Horizontal	0.86	0	
Turn left							
386	Balmoral Way	Drop Kerb	7.6	Horizontal	1.52	1	
Otherside							
388	Balmoral Way	Narrow	8.2	Horizontal	1.64	1	Unrestricted (No Lines)
389	Balmoral Way	Unrestricted (No Lines)	3.1	Horizontal	0.62	0	
390	Balmoral Way	Drop Kerb	3.7	Horizontal	0.74	0	
Otherside							
392	Balmoral Way	Narrow	4.6	Horizontal	0.92	0	Unrestricted (No Lines)
393	Balmoral Way	Narrow	6.7	Horizontal	1.34	1	Drop Kerb
394	Balmoral Way	Narrow	18.7	Horizontal	3.74	3	Unrestricted (No Lines)
395	Balmoral Way	Narrow	7.6	Horizontal	1.52	1	Drop Kerb
396	Balmoral Way	Narrow	14.1	Horizontal	2.82	2	Unrestricted (No Lines)
397	Balmoral Way	Narrow	2.9	Horizontal	0.58	0	Double Yellow Lines
398	Balmoral Way	Narrow	4.5	Horizontal	0.9	0	Pedestrian Crossing
Turn left							
400	Balmoral Way	Narrow	3.8	Horizontal	0.76	0	Double Yellow Lines
401	Balmoral Way	Narrow	9.6	Horizontal	1.92	1	Unrestricted (No Lines)
402	Balmoral Way	Narrow	13.6	Horizontal	2.72	2	Drop Kerb
403	Balmoral Way	Narrow	8.5	Horizontal	1.7	1	Unrestricted (No Lines)
404	Balmoral Way	Narrow	6.9	Horizontal	1.38	1	Drop Kerb
405	Balmoral Way	Narrow	9	Horizontal	1.8	1	Double Yellow Lines
406	Balmoral Way	Double Yellow Lines	2.8	Horizontal	0.56	0	
407	Balmoral Way	Pedestrian Crossing	2.8	Horizontal	0.56	0	
408	Balmoral Way	Double Yellow Lines	31.4	Horizontal	6.28	6	
Turn left							
410	Balmoral Way	Drop Kerb	10	Horizontal	2	2	
411	Balmoral Way	Unrestricted (No Lines)	9.3	Horizontal	1.86	1	
Otherside							
413	Balmoral Way	Narrow	6.2	Horizontal	1.24	1	Drop Kerb
414	Balmoral Way	Narrow	2.7	Horizontal	0.54	0	Unrestricted (No Lines)
415	Balmoral Way	Narrow	9.4	Horizontal	1.88	1	Double Yellow Lines
Turn left							
417	Balmoral Way	Double Yellow Lines	2.8	Horizontal	0.56	0	
418	Balmoral Way	Drop Kerb	6.1	Horizontal	1.22	1	
Otherside							
420	Balmoral Way	Narrow	6	Horizontal	1.2	1	Drop Kerb
421	Balmoral Way	Narrow	44.5	Horizontal	8.9	8	Double Yellow Lines
Turn left							
423	Balmoral Way	Narrow	14.5	Horizontal	2.9	2	Double Yellow Lines
424	Balmoral Way	Narrow	3.1	Horizontal	0.62	0	Drop Kerb
Otherside							
426	Balmoral Way	Unrestricted (No Lines)	1.8	Horizontal	0.36	0	
427	Balmoral Way	Drop Kerb	7.5	Horizontal	1.5	1	
428	Balmoral Way	Unrestricted (No Lines)	14.2	Horizontal	2.84	2	
429	Balmoral Way	Drop Kerb	8.6	Horizontal	1.72	1	
430	Balmoral Way	Unrestricted (No Lines)	9.6	Horizontal	1.92	1	
431	Balmoral Way	Drop Kerb	7.6	Horizontal	1.52	1	



Project ID and Name: IW0451 Dorset Road, Sutton
Survey Type: Parking Beats

ID	Street Name	Parking Restriction	Length (mts)	Bays / Vertical / horizontal	Parking Capacity (mts)	Parking Capacity (Round down)	Comments
432	Balmoral Way	Unrestricted (No Lines)	10.4	Horizontal	2.08	2	
433	Balmoral Way	Drop Kerb	7.5	Horizontal	1.5	1	
434	Balmoral Way	Unrestricted (No Lines)	6.8	Horizontal	1.36	1	
435	Balmoral Way	Drop Kerb	9.6	Horizontal	1.92	1	
436	Balmoral Way	Unrestricted (No Lines)	19.7	Horizontal	3.94	3	
437	Balmoral Way	Drop Kerb	8.7	Horizontal	1.74	1	
438	Balmoral Way	Double Yellow Lines	7.6	Horizontal	1.52	1	
439	Balmoral Way	Drop Kerb	6.8	Horizontal	1.36	1	
440	Balmoral Way	Double Yellow Lines	10.3	Horizontal	2.06	2	
441	Balmoral Way	Unrestricted (No Lines)	14.2	Horizontal	2.84	2	
442	Balmoral Way	Drop Kerb	8.6	Horizontal	1.72	1	
443	Balmoral Way	Unrestricted (No Lines)	25.4	Horizontal	5.08	5	
444	Balmoral Way	Drop Kerb	7.5	Horizontal	1.5	1	
445	Balmoral Way	Unrestricted (No Lines)	11.3	Horizontal	2.26	2	
446	Balmoral Way	Drop Kerb	6.9	Horizontal	1.38	1	
447	Balmoral Way	Double Yellow Lines	4.5	Horizontal	0.9	0	
448	Balmoral Way	Pedestrian Crossing	2.8	Horizontal	0.56	0	
449	Balmoral Way	Double Yellow Lines	4.9	Horizontal	0.98	0	
Turn left into Dorset Road							
451	Dorset Road	Double Yellow Lines	8	Horizontal	1.6	1	
452	Dorset Road	Unrestricted (No Lines)	16.1	Horizontal	3.22	3	
453	Dorset Road	Drop Kerb	9.4	Horizontal	1.88	1	
454	Dorset Road	Unrestricted (No Lines)	31	Horizontal	6.2	6	
455	Dorset Road	Double Yellow Lines	6.8	Horizontal	1.36	1	
456	Dorset Road	Pedestrian Crossing	4.5	Horizontal	0.9	0	
Turn left into Avenue Road							
458	Avenue Road	Pedestrian Crossing	4.7	Horizontal	0.94	0	
459	Avenue Road	Double Yellow Lines	6.9	Horizontal	1.38	1	
460	Avenue Road	Single Yellow Lines	8.9	Horizontal	1.78	1	
461	Avenue Road	Drop Kerb	4.5	Horizontal	0.9	0	
462	Avenue Road	Single Yellow Lines	3.6	Horizontal	0.72	0	
463	Avenue Road	Drop Kerb	10.2	Horizontal	2.04	2	
464	Avenue Road	Single Yellow Lines	3.3	Horizontal	0.66	0	
465	Avenue Road	Drop Kerb	4.3	Horizontal	0.86	0	
466	Avenue Road	Single Yellow Lines	2	Horizontal	0.4	0	
467	Avenue Road	Drop Kerb	4.6	Horizontal	0.92	0	
468	Avenue Road	Single Yellow Lines	24.2	Horizontal	4.84	4	
469	Avenue Road	Drop Kerb	7.9	Horizontal	1.58	1	
470	Avenue Road	Single Yellow Lines	4.6	Horizontal	0.92	0	
471	Avenue Road	Drop Kerb	4	Horizontal	0.8	0	
472	Avenue Road	Single Yellow Lines	12.5	Horizontal	2.5	2	
473	Avenue Road	Drop Kerb	3.4	Horizontal	0.68	0	
474	Avenue Road	Single Yellow Lines	5	Horizontal	1	1	
475	Avenue Road	Drop Kerb	4.1	Horizontal	0.82	0	
476	Avenue Road	Single Yellow Lines	11.9	Horizontal	2.38	2	
477	Avenue Road	Drop Kerb	3.9	Horizontal	0.78	0	
478	Avenue Road	Single Yellow Lines	6.3	Horizontal	1.26	1	
479	Avenue Road	Double Yellow Lines	13.9	Horizontal	2.78	2	
480	Avenue Road	Drop Kerb	4.4	Horizontal	0.88	0	
481	Avenue Road	Double Yellow Lines	3.4	Horizontal	0.68	0	
482	Avenue Road	Narrow	3.5	Horizontal	0.7	0	Double Yellow Lines
483	Avenue Road	Narrow	3.9	Horizontal	0.78	0	Pedestrian Crossing
484	Avenue Road	Narrow	2.3	Horizontal	0.46	0	Double Yellow Lines
485	Avenue Road	School Keep Clear	8.6	Horizontal	1.72	1	
486	Avenue Road	Drop Kerb	4.3	Horizontal	0.86	0	
487	Avenue Road	School Keep Clear	13.4	Horizontal	2.68	2	
488	Avenue Road	Narrow	4.5	Horizontal	0.9	0	Pedestrian Crossing
489	Avenue Road	Drop Kerb	6.3	Horizontal	1.26	1	
490	Avenue Road	Double Yellow Lines	13.7	Horizontal	2.74	2	
491	Avenue Road	Single Yellow Lines	7.2	Horizontal	1.44	1	
492	Avenue Road	Drop Kerb	3.6	Horizontal	0.72	0	
493	Avenue Road	Single Yellow Lines	20	Horizontal	4	4	
494	Avenue Road	Drop Kerb	4.7	Horizontal	0.94	0	
495	Avenue Road	Single Yellow Lines	19.2	Horizontal	3.84	3	
496	Avenue Road	Drop Kerb	4.2	Horizontal	0.84	0	
497	Avenue Road	Single Yellow Lines	3.6	Horizontal	0.72	0	
498	Avenue Road	Drop Kerb	5.3	Horizontal	1.06	1	
499	Avenue Road	Single Yellow Lines	2.1	Horizontal	0.42	0	
500	Avenue Road	Drop Kerb	4.4	Horizontal	0.88	0	
501	Avenue Road	Single Yellow Lines	10.5	Horizontal	2.1	2	
502	Avenue Road	Drop Kerb	8.3	Horizontal	1.66	1	
503	Avenue Road	Single Yellow Lines	9.4	Horizontal	1.88	1	
504	Avenue Road	Drop Kerb	8	Horizontal	1.6	1	
505	Avenue Road	Single Yellow Lines	7.6	Horizontal	1.52	1	
506	Avenue Road	Double Yellow Lines	12.4	Horizontal	2.48	2	
Outhside of Avenue Road from Northdown Road roundabout]							
508	Avenue Road	Double Yellow Lines	11.7	Horizontal	2.34	2	
509	Avenue Road	Unrestricted (No Lines)	26.7	Horizontal	5.34	5	
510	Avenue Road	Drop Kerb	10	Horizontal	2	2	
511	Avenue Road	Unrestricted (No Lines)	14.8	Horizontal	2.96	2	
512	Avenue Road	Drop Kerb	9.7	Horizontal	1.94	1	
513	Avenue Road	Unrestricted (No Lines)	13.9	Horizontal	2.78	2	
514	Avenue Road	Drop Kerb	7.8	Horizontal	1.56	1	
515	Avenue Road	Unrestricted (No Lines)	16.3	Horizontal	3.26	3	
516	Avenue Road	Drop Kerb	9.2	Horizontal	1.84	1	
517	Avenue Road	Double Yellow Lines	14.9	Horizontal	2.98	2	
518	Avenue Road	Drop Kerb	10.2	Horizontal	2.04	2	
519	Avenue Road	Double Yellow Lines	5	Horizontal	1	1	
520	Avenue Road	Pedestrian Crossing	4.1	Horizontal	0.82	0	
521	Avenue Road	School Keep Clear	3	Horizontal	0.6	0	
522	Avenue Road	Drop Kerb	5.7	Horizontal	1.14	1	
523	Avenue Road	School Keep Clear	5.4	Horizontal	1.08	1	
524	Avenue Road	Drop Kerb	6.8	Horizontal	1.36	1	
525	Avenue Road	School Keep Clear	4.7	Horizontal	0.94	0	
526	Avenue Road	Double Yellow Lines	1.7	Horizontal	0.34	0	
527	Avenue Road	Pedestrian Crossing	4	Horizontal	0.8	0	
528	Avenue Road	Double Yellow Lines	1.5	Horizontal	0.3	0	
529	Avenue Road	Drop Kerb	7.5	Horizontal	1.5	1	
530	Avenue Road	Double Yellow Lines	5.9	Horizontal	1.18	1	
531	Avenue Road	Drop Kerb	8.7	Horizontal	1.74	1	
532	Avenue Road	Unrestricted (No Lines)	11.9	Horizontal	2.38	2	
533	Avenue Road	Drop Kerb	4.8	Horizontal	0.96	0	
534	Avenue Road	Unrestricted (No Lines)	7.3	Horizontal	1.46	1	
535	Avenue Road	Drop Kerb	5.1	Horizontal	1.02	1	
536	Avenue Road	Unrestricted (No Lines)	13.9	Horizontal	2.78	2	
537	Avenue Road	Drop Kerb	7.3	Horizontal	1.46	1	
538	Avenue Road	Unrestricted (No Lines)	5.5	Horizontal	1.1	1	
539	Avenue Road	Drop Kerb	10.2	Horizontal	2.04	2	



Project ID and Name: IW0451 Dorset Road, Sutton
Survey Type: Parking Beats

ID	Street Name	Parking Restriction	Length (mts)	Bays / Vertical / horizontal	Parking Capacity (mts)	Parking Capacity (Round down)	Comments
540	Avenue Road	Unrestricted (No Lines)	15	Horizontal	3	3	
541	Avenue Road	Drop Kerb	5.1	Horizontal	1.02	1	
542	Avenue Road	Unrestricted (No Lines)	8.1	Horizontal	1.62	1	
543	Avenue Road	Drop Kerb	5.1	Horizontal	1.02	1	
544	Avenue Road	White Line	1.8	Horizontal	0.36	0	
545	Avenue Road	Drop Kerb	4.7	Horizontal	0.94	0	
546	Avenue Road	Unrestricted (No Lines)	7.3	Horizontal	1.46	1	
547	Avenue Road	Drop Kerb	4.7	Horizontal	0.94	0	
548	Avenue Road	Unrestricted (No Lines)	7.8	Horizontal	1.56	1	
549	Avenue Road	Double Yellow Lines	4.3	Horizontal	0.86	0	
550	Avenue Road	Drop Kerb	6.5	Horizontal	1.3	1	
551	Avenue Road	Pedestrian Crossing	4.4	Horizontal	0.88	0	
Turn left into Dorset Road							
553	Dorset Road	Pedestrian Crossing	4.2	Horizontal	0.84	0	
554	Dorset Road	Double Yellow Lines	9	Horizontal	1.8	1	
555	Dorset Road	Unrestricted (No Lines)	47	Horizontal	9.4	9	
556	Dorset Road	Drop Kerb	5.7	Horizontal	1.14	1	
557	Dorset Road	Unrestricted (No Lines)	2.1	Horizontal	0.42	0	
558	Dorset Road	Drop Kerb	5.7	Horizontal	1.14	1	
559	Dorset Road	School Keep Clear	3.6	Horizontal	0.72	0	
560	Dorset Road	Drop Kerb	5.7	Horizontal	1.14	1	
561	Dorset Road	School Keep Clear	9.3	Horizontal	1.86	1	
562	Dorset Road	Pedestrian Crossing	3.8	Horizontal	0.76	0	
563	Dorset Road	School Keep Clear	4.9	Horizontal	0.98	0	
564	Dorset Road	Drop Kerb	6.3	Horizontal	1.26	1	
565	Dorset Road	Double Yellow Lines	7.7	Horizontal	1.54	1	
566	Dorset Road	Drop Kerb	6	Horizontal	1.2	1	
567	Dorset Road	Double Yellow Lines	3.7	Horizontal	0.74	0	
568	Dorset Road	Unrestricted (No Lines)	2.2	Horizontal	0.44	0	
569	Dorset Road	Drop Kerb	5.4	Horizontal	1.08	1	
570	Dorset Road	Unrestricted (No Lines)	7.4	Horizontal	1.48	1	
571	Dorset Road	Double Red Lines	9.5	Horizontal	1.9	1	
572	Dorset Road	Drop Kerb	5.2	Horizontal	1.04	1	
573	Dorset Road	Double Red Lines	2.4	Horizontal	0.48	0	
574	Dorset Road	Drop Kerb	6.8	Horizontal	1.36	1	
575	Dorset Road	Double Red Lines	13.4	Horizontal	2.68	2	
576	Dorset Road	Drop Kerb	5.7	Horizontal	1.14	1	
577	Dorset Road	Double Red Lines	6.6	Horizontal	1.32	1	
578	Dorset Road	Drop Kerb	2.7	Horizontal	0.54	0	
579	Dorset Road	Double Red Lines	2.9	Horizontal	0.58	0	
580	Dorset Road	Pedestrian Crossing	4.6	Horizontal	0.92	0	
End of Dorset Road at Belmont Rise							
			4673		934.6	663	



Note: Overstress at some of the ID's are due to nose to tail parking and vehicles parked in less than 5mts spaces

Survey Date	Survey Timing	ID	Street Name	Parking Restriction	Parking Capacity (Round down)	Vehicles Parked	Empty Spaces	Length	Occupancy %
01/10/2025	00:30	26	York Road	Unrestricted (No Lines)	1	1	0	7.6	100%
01/10/2025	00:30	30	York Road	Unrestricted (No Lines)	2	1	1	11.4	50%
01/10/2025	00:30	32	York Road	Unrestricted (No Lines)	3	2	1	18	67%
01/10/2025	00:30	38	York Road	Unrestricted (No Lines)	2	1	1	10.5	50%
01/10/2025	00:30	56	York Road	Unrestricted (No Lines)	3	1	2	15	33%
01/10/2025	00:30	73	York Road	Unrestricted (No Lines)	1	1	0	6.3	100%
01/10/2025	00:30	81	York Road	Unrestricted (No Lines)	1	1	0	5.7	100%
01/10/2025	00:30	91	York Road	Unrestricted (No Lines)	3	1	2	15.1	33%
01/10/2025	00:30	103	York Road	Unrestricted (No Lines)	2	1	1	11.3	50%
01/10/2025	00:30	121	York Road	Unrestricted (No Lines)	2	1	1	11.4	50%
01/10/2025	00:30	125	York Road	Unrestricted (No Lines)	2	2	0	10.2	100%
01/10/2025	00:30	126	York Road	Drop Kerb	2	1	1	11.3	50%
01/10/2025	00:30	129	York Road	Unrestricted (No Lines)	2	1	1	10.4	50%
01/10/2025	00:30	135	York Road	Unrestricted (No Lines)	1	1	0	5.7	100%
01/10/2025	00:30	144	Dorset Road	Unrestricted (No Lines)	4	1	3	22.5	25%
01/10/2025	00:30	146	Dorset Road	Unrestricted (No Lines)	1	2	0	8.5	200%
01/10/2025	00:30	164	Holland Avenue	Unrestricted (No Lines)	15	1	14	75.6	7%
01/10/2025	00:30	172	Holland Avenue	Unrestricted (No Lines)	3	1	2	15.1	33%
01/10/2025	00:30	174	Holland Avenue	Unrestricted (No Lines)	3	1	2	15	33%
01/10/2025	00:30	178	Holland Avenue	Unrestricted (No Lines)	1	1	0	9.5	100%
01/10/2025	00:30	196	Holland Avenue	Unrestricted (No Lines)	3	1	2	15.9	33%
01/10/2025	00:30	216	Holland Avenue	Drop Kerb	1	1	0	9.5	100%
01/10/2025	00:30	217	Holland Avenue	Unrestricted (No Lines)	1	1	0	8.4	100%
01/10/2025	00:30	219	Holland Avenue	Unrestricted (No Lines)	0	1	0	4.7	100%
01/10/2025	00:30	233	Holland Avenue	Unrestricted (No Lines)	2	1	1	12.3	50%
01/10/2025	00:30	240	Holland Avenue	Drop Kerb	2	1	1	10	50%
01/10/2025	00:30	241	Holland Avenue	Unrestricted (No Lines)	3	1	2	15.4	33%
01/10/2025	00:30	253	Holland Avenue	Unrestricted (No Lines)	1	1	0	5	100%
01/10/2025	00:30	261	Holland Avenue	Unrestricted (No Lines)	2	1	1	14.5	50%
01/10/2025	00:30	269	Holland Avenue	Unrestricted (No Lines)	2	1	1	11.9	50%
01/10/2025	00:30	288	Dorset Road	Unrestricted (No Lines)	4	1	3	24	25%
01/10/2025	00:30	292	Dorset Road	Unrestricted (No Lines)	2	1	1	13.2	50%
01/10/2025	00:30	296	Dorset Road	Unrestricted (No Lines)	1	1	0	8.5	100%
01/10/2025	00:30	298	Dorset Road	Unrestricted (No Lines)	4	4	0	20.5	100%
01/10/2025	00:30	302	Bowling Way	Unrestricted (No Lines)	1	1	0	9	100%
01/10/2025	00:30	304	Bowling Way	Unrestricted (No Lines)	3	1	2	17.8	33%
01/10/2025	00:30	306	Bowling Way	Unrestricted (No Lines)	3	2	1	17.6	67%
01/10/2025	00:30	317	Brasted Close	Drop Kerb	3	1	2	15	33%
01/10/2025	00:30	320	Brasted Close	Unrestricted (No Lines)	1	1	0	6.7	100%
01/10/2025	00:30	322	Brasted Close	Unrestricted (No Lines)	0	1	0	4	100%
01/10/2025	00:30	349	Brasted Close	Unrestricted (No Lines)	6	3	3	33.9	50%
01/10/2025	00:30	353	Dorset Road	Unrestricted (No Lines)	1	1	0	9.1	100%
01/10/2025	00:30	355	Dorset Road	Unrestricted (No Lines)	6	1	5	30.4	17%
01/10/2025	00:30	411	Balmoral Way	Unrestricted (No Lines)	1	1	0	9.3	100%
01/10/2025	00:30	428	Balmoral Way	Unrestricted (No Lines)	2	1	1	14.2	50%
01/10/2025	00:30	430	Balmoral Way	Unrestricted (No Lines)	1	1	0	9.6	100%
01/10/2025	00:30	432	Balmoral Way	Unrestricted (No Lines)	2	1	1	10.4	50%
01/10/2025	00:30	434	Balmoral Way	Unrestricted (No Lines)	1	1	0	6.8	100%
01/10/2025	00:30	436	Balmoral Way	Unrestricted (No Lines)	3	2	1	19.7	67%



Note: Overstress at some of the ID's are due to nose to tail parking and vehicles parked in less than 5mts spaces

Survey Date	Survey Timing	ID	Street Name	Parking Restriction	Parking Capacity (Round down)	Vehicles Parked	Empty Spaces	Length	Occupancy %
01/10/2025	00:30	454	Dorset Road	Unrestricted (No Lines)	6	2	4	31	33%
01/10/2025	00:30	509	Avenue Road	Unrestricted (No Lines)	5	4	1	26.7	80%
01/10/2025	00:30	511	Avenue Road	Unrestricted (No Lines)	2	2	0	14.8	100%
01/10/2025	00:30	513	Avenue Road	Unrestricted (No Lines)	2	2	0	13.9	100%
01/10/2025	00:30	515	Avenue Road	Unrestricted (No Lines)	3	2	1	16.3	67%
01/10/2025	00:30	534	Avenue Road	Unrestricted (No Lines)	1	1	0	7.3	100%
01/10/2025	00:30	536	Avenue Road	Unrestricted (No Lines)	2	1	1	13.9	50%
01/10/2025	00:30	555	Dorset Road	Unrestricted (No Lines)	9	1	8	47	11%
02/10/2025	00:30	26	York Road	Unrestricted (No Lines)	1	1	0	7.6	100%
02/10/2025	00:30	30	York Road	Unrestricted (No Lines)	2	1	1	11.4	50%
02/10/2025	00:30	32	York Road	Unrestricted (No Lines)	3	2	1	18	67%
02/10/2025	00:30	38	York Road	Unrestricted (No Lines)	2	1	1	10.5	50%
02/10/2025	00:30	56	York Road	Unrestricted (No Lines)	3	1	2	15	33%
02/10/2025	00:30	66	York Road	Unrestricted (No Lines)	2	1	1	12.3	50%
02/10/2025	00:30	73	York Road	Unrestricted (No Lines)	1	1	0	6.3	100%
02/10/2025	00:30	75	York Road	Unrestricted (No Lines)	1	1	0	6.5	100%
02/10/2025	00:30	81	York Road	Unrestricted (No Lines)	1	1	0	5.7	100%
02/10/2025	00:30	91	York Road	Unrestricted (No Lines)	3	1	2	15.1	33%
02/10/2025	00:30	103	York Road	Unrestricted (No Lines)	2	1	1	11.3	50%
02/10/2025	00:30	121	York Road	Unrestricted (No Lines)	2	1	1	11.4	50%
02/10/2025	00:30	125	York Road	Unrestricted (No Lines)	2	2	0	10.2	100%
02/10/2025	00:30	129	York Road	Unrestricted (No Lines)	2	2	0	10.4	100%
02/10/2025	00:30	131	York Road	Unrestricted (No Lines)	1	1	0	9.5	100%
02/10/2025	00:30	135	York Road	Unrestricted (No Lines)	1	1	0	5.7	100%
02/10/2025	00:30	146	Dorset Road	Unrestricted (No Lines)	1	1	0	8.5	100%
02/10/2025	00:30	164	Holland Avenue	Unrestricted (No Lines)	15	2	13	75.6	13%
02/10/2025	00:30	172	Holland Avenue	Unrestricted (No Lines)	3	1	2	15.1	33%
02/10/2025	00:30	174	Holland Avenue	Unrestricted (No Lines)	3	1	2	15	33%
02/10/2025	00:30	178	Holland Avenue	Unrestricted (No Lines)	1	1	0	9.5	100%
02/10/2025	00:30	196	Holland Avenue	Unrestricted (No Lines)	3	1	2	15.9	33%
02/10/2025	00:30	200	Holland Avenue	Unrestricted (No Lines)	1	1	0	9.4	100%
02/10/2025	00:30	213	Holland Avenue	Unrestricted (No Lines)	1	1	0	7.8	100%
02/10/2025	00:30	217	Holland Avenue	Unrestricted (No Lines)	1	1	0	8.4	100%
02/10/2025	00:30	233	Holland Avenue	Unrestricted (No Lines)	2	1	1	12.3	50%
02/10/2025	00:30	240	Holland Avenue	Drop Kerb	2	1	1	10	50%
02/10/2025	00:30	241	Holland Avenue	Unrestricted (No Lines)	3	1	2	15.4	33%
02/10/2025	00:30	253	Holland Avenue	Unrestricted (No Lines)	1	1	0	5	100%
02/10/2025	00:30	261	Holland Avenue	Unrestricted (No Lines)	2	1	1	14.5	50%
02/10/2025	00:30	269	Holland Avenue	Unrestricted (No Lines)	2	1	1	11.9	50%
02/10/2025	00:30	288	Dorset Road	Unrestricted (No Lines)	4	1	3	24	25%
02/10/2025	00:30	292	Dorset Road	Unrestricted (No Lines)	2	1	1	13.2	50%
02/10/2025	00:30	294	Dorset Road	Unrestricted (No Lines)	3	1	2	15.9	33%
02/10/2025	00:30	298	Dorset Road	Unrestricted (No Lines)	4	4	0	20.5	100%
02/10/2025	00:30	302	Bowling Way	Unrestricted (No Lines)	1	1	0	9	100%
02/10/2025	00:30	306	Bowling Way	Unrestricted (No Lines)	3	2	1	17.6	67%
02/10/2025	00:30	317	Brasted Close	Drop Kerb	3	1	2	15	33%
02/10/2025	00:30	320	Brasted Close	Unrestricted (No Lines)	1	1	0	6.7	100%
02/10/2025	00:30	322	Brasted Close	Unrestricted (No Lines)	0	1	0	4	100%
02/10/2025	00:30	349	Brasted Close	Unrestricted (No Lines)	6	3	3	33.9	50%



Note: Overstress at some of the ID's are due to nose to tail parking and vehicles parked in less than 5mts spaces

Survey Date	Survey Timing	ID	Street Name	Parking Restriction	Parking Capacity (Round down)	Vehicles Parked	Empty Spaces	Length	Occupancy %
02/10/2025	00:30	355	Dorset Road	Unrestricted (No Lines)	6	3	3	30.4	50%
02/10/2025	00:30	428	Balmoral Way	Unrestricted (No Lines)	2	2	0	14.2	100%
02/10/2025	00:30	430	Balmoral Way	Unrestricted (No Lines)	1	2	0	9.6	200%
02/10/2025	00:30	432	Balmoral Way	Unrestricted (No Lines)	2	1	1	10.4	50%
02/10/2025	00:30	434	Balmoral Way	Unrestricted (No Lines)	1	1	0	6.8	100%
02/10/2025	00:30	436	Balmoral Way	Unrestricted (No Lines)	3	2	1	19.7	67%
02/10/2025	00:30	454	Dorset Road	Unrestricted (No Lines)	6	3	3	31	50%
02/10/2025	00:30	509	Avenue Road	Unrestricted (No Lines)	5	3	2	26.7	60%
02/10/2025	00:30	511	Avenue Road	Unrestricted (No Lines)	2	2	0	14.8	100%
02/10/2025	00:30	513	Avenue Road	Unrestricted (No Lines)	2	1	1	13.9	50%
02/10/2025	00:30	515	Avenue Road	Unrestricted (No Lines)	3	2	1	16.3	67%
02/10/2025	00:30	534	Avenue Road	Unrestricted (No Lines)	1	1	0	7.3	100%
02/10/2025	00:30	536	Avenue Road	Unrestricted (No Lines)	2	1	1	13.9	50%
02/10/2025	00:30	555	Dorset Road	Unrestricted (No Lines)	9	1	8	47	11%
03/10/2025	10:00	10	Dorset Road	Unrestricted (No Lines)	2	2	0	14.4	100%
03/10/2025	10:00	18	York Road	Unrestricted (No Lines)	1	1	0	7.5	100%
03/10/2025	10:00	21	York Road	Drop Kerb	1	1	0	5.7	100%
03/10/2025	10:00	23	York Road	Drop Kerb	1	1	0	9.4	100%
03/10/2025	10:00	24	York Road	Unrestricted (No Lines)	2	2	0	11.3	100%
03/10/2025	10:00	26	York Road	Unrestricted (No Lines)	1	1	0	7.6	100%
03/10/2025	10:00	28	York Road	Unrestricted (No Lines)	0	1	0	4.7	100%
03/10/2025	10:00	32	York Road	Unrestricted (No Lines)	3	3	0	18	100%
03/10/2025	10:00	34	York Road	Unrestricted (No Lines)	3	1	2	16	33%
03/10/2025	10:00	36	York Road	Unrestricted (No Lines)	1	1	0	6.6	100%
03/10/2025	10:00	38	York Road	Unrestricted (No Lines)	2	2	0	10.5	100%
03/10/2025	10:00	46	York Road	Unrestricted (No Lines)	2	1	1	12.2	50%
03/10/2025	10:00	48	York Road	Unrestricted (No Lines)	2	1	1	14.3	50%
03/10/2025	10:00	50	York Road	Unrestricted (No Lines)	1	1	0	8.5	100%
03/10/2025	10:00	56	York Road	Unrestricted (No Lines)	3	1	2	15	33%
03/10/2025	10:00	73	York Road	Unrestricted (No Lines)	1	1	0	6.3	100%
03/10/2025	10:00	75	York Road	Unrestricted (No Lines)	1	1	0	6.5	100%
03/10/2025	10:00	91	York Road	Unrestricted (No Lines)	3	1	2	15.1	33%
03/10/2025	10:00	103	York Road	Unrestricted (No Lines)	2	2	0	11.3	100%
03/10/2025	10:00	111	York Road	Unrestricted (No Lines)	1	1	0	9.4	100%
03/10/2025	10:00	113	York Road	Unrestricted (No Lines)	1	1	0	7.6	100%
03/10/2025	10:00	121	York Road	Unrestricted (No Lines)	2	1	1	11.4	50%
03/10/2025	10:00	125	York Road	Unrestricted (No Lines)	2	2	0	10.2	100%
03/10/2025	10:00	131	York Road	Unrestricted (No Lines)	1	1	0	9.5	100%
03/10/2025	10:00	133	York Road	Unrestricted (No Lines)	1	1	0	7.8	100%
03/10/2025	10:00	135	York Road	Unrestricted (No Lines)	1	1	0	5.7	100%
03/10/2025	10:00	144	Dorset Road	Unrestricted (No Lines)	4	3	1	22.5	75%
03/10/2025	10:00	146	Dorset Road	Unrestricted (No Lines)	1	1	0	8.5	100%
03/10/2025	10:00	148	Dorset Road	Unrestricted (No Lines)	1	1	0	7.6	100%
03/10/2025	10:00	150	Dorset Road	Unrestricted (No Lines)	1	1	0	5	100%
03/10/2025	10:00	158	Holland Avenue	Unrestricted (No Lines)	0	1	0	3.2	100%
03/10/2025	10:00	160	Holland Avenue	Unrestricted (No Lines)	1	1	0	5.1	100%
03/10/2025	10:00	162	Holland Avenue	Unrestricted (No Lines)	1	1	0	6.2	100%
03/10/2025	10:00	164	Holland Avenue	Unrestricted (No Lines)	15	4	11	75.6	27%
03/10/2025	10:00	166	Holland Avenue	Unrestricted (No Lines)	1	1	0	8.4	100%



Note: Overstress at some of the ID's are due to nose to tail parking and vehicles parked in less than 5mts spaces

Survey Date	Survey Timing	ID	Street Name	Parking Restriction	Parking Capacity (Round down)	Vehicles Parked	Empty Spaces	Length	Occupancy %
03/10/2025	10:00	172	Holland Avenue	Unrestricted (No Lines)	3	1	2	15.1	33%
03/10/2025	10:00	178	Holland Avenue	Unrestricted (No Lines)	1	1	0	9.5	100%
03/10/2025	10:00	182	Holland Avenue	Unrestricted (No Lines)	2	1	1	12.2	50%
03/10/2025	10:00	190	Holland Avenue	Unrestricted (No Lines)	2	1	1	12.4	50%
03/10/2025	10:00	192	Holland Avenue	Unrestricted (No Lines)	1	1	0	6.3	100%
03/10/2025	10:00	216	Holland Avenue	Drop Kerb	1	1	0	9.5	100%
03/10/2025	10:00	217	Holland Avenue	Unrestricted (No Lines)	1	1	0	8.4	100%
03/10/2025	10:00	221	Holland Avenue	Unrestricted (No Lines)	0	1	0	3.3	100%
03/10/2025	10:00	233	Holland Avenue	Unrestricted (No Lines)	2	1	1	12.3	50%
03/10/2025	10:00	239	Holland Avenue	Unrestricted (No Lines)	1	1	0	8	100%
03/10/2025	10:00	241	Holland Avenue	Unrestricted (No Lines)	3	1	2	15.4	33%
03/10/2025	10:00	253	Holland Avenue	Unrestricted (No Lines)	1	1	0	5	100%
03/10/2025	10:00	261	Holland Avenue	Unrestricted (No Lines)	2	1	1	14.5	50%
03/10/2025	10:00	267	Holland Avenue	Unrestricted (No Lines)	1	1	0	9.3	100%
03/10/2025	10:00	269	Holland Avenue	Unrestricted (No Lines)	2	1	1	11.9	50%
03/10/2025	10:00	273	Holland Avenue	Unrestricted (No Lines)	1	1	0	8.5	100%
03/10/2025	10:00	279	Holland Avenue	Unrestricted (No Lines)	1	1	0	8.9	100%
03/10/2025	10:00	288	Dorset Road	Unrestricted (No Lines)	4	4	0	24	100%
03/10/2025	10:00	292	Dorset Road	Unrestricted (No Lines)	2	1	1	13.2	50%
03/10/2025	10:00	294	Dorset Road	Unrestricted (No Lines)	3	2	1	15.9	67%
03/10/2025	10:00	296	Dorset Road	Unrestricted (No Lines)	1	1	0	8.5	100%
03/10/2025	10:00	298	Dorset Road	Unrestricted (No Lines)	4	3	1	20.5	75%
03/10/2025	10:00	304	Bowling Way	Unrestricted (No Lines)	3	1	2	17.8	33%
03/10/2025	10:00	306	Bowling Way	Unrestricted (No Lines)	3	1	2	17.6	33%
03/10/2025	10:00	317	Brasted Close	Drop Kerb	3	1	2	15	33%
03/10/2025	10:00	318	Brasted Close	Unrestricted (No Lines)	0	1	0	3	100%
03/10/2025	10:00	322	Brasted Close	Unrestricted (No Lines)	0	1	0	4	100%
03/10/2025	10:00	333	Brasted Close	Unrestricted (No Lines)	0	1	0	3.8	100%
03/10/2025	10:00	349	Brasted Close	Unrestricted (No Lines)	6	4	2	33.9	67%
03/10/2025	10:00	355	Dorset Road	Unrestricted (No Lines)	6	3	3	30.4	50%
03/10/2025	10:00	430	Balmoral Way	Unrestricted (No Lines)	1	1	0	9.6	100%
03/10/2025	10:00	432	Balmoral Way	Unrestricted (No Lines)	2	2	0	10.4	100%
03/10/2025	10:00	436	Balmoral Way	Unrestricted (No Lines)	3	1	2	19.7	33%
03/10/2025	10:00	452	Dorset Road	Unrestricted (No Lines)	3	2	1	16.1	67%
03/10/2025	10:00	454	Dorset Road	Unrestricted (No Lines)	6	5	1	31	83%
03/10/2025	10:00	509	Avenue Road	Unrestricted (No Lines)	5	4	1	26.7	80%
03/10/2025	10:00	511	Avenue Road	Unrestricted (No Lines)	2	3	0	14.8	150%
03/10/2025	10:00	513	Avenue Road	Unrestricted (No Lines)	2	2	0	13.9	100%
03/10/2025	10:00	515	Avenue Road	Unrestricted (No Lines)	3	3	0	16.3	100%
03/10/2025	10:00	517	Avenue Road	Double Yellow Lines	2	1	1	14.9	50%
03/10/2025	10:00	522	Avenue Road	Drop Kerb	1	1	0	5.7	100%
03/10/2025	10:00	532	Avenue Road	Unrestricted (No Lines)	2	2	0	11.9	100%
03/10/2025	10:00	534	Avenue Road	Unrestricted (No Lines)	1	1	0	7.3	100%
03/10/2025	10:00	536	Avenue Road	Unrestricted (No Lines)	2	2	0	13.9	100%
03/10/2025	10:00	538	Avenue Road	Unrestricted (No Lines)	1	1	0	5.5	100%
03/10/2025	10:00	540	Avenue Road	Unrestricted (No Lines)	3	2	1	15	67%
03/10/2025	10:00	542	Avenue Road	Unrestricted (No Lines)	1	1	0	8.1	100%
03/10/2025	10:00	546	Avenue Road	Unrestricted (No Lines)	1	1	0	7.3	100%
03/10/2025	10:00	548	Avenue Road	Unrestricted (No Lines)	1	1	0	7.8	100%



Note: Overstress at some of the ID's are due to nose to tail parking and vehicles parked in less than 5mts spaces

Survey Date	Survey Timing	ID	Street Name	Parking Restriction	Parking Capacity (Round down)	Vehicles Parked	Empty Spaces	Length	Occupancy %
03/10/2025	10:00	555	Dorset Road	Unrestricted (No Lines)	9	7	2	47	78%
03/10/2025	12:00	10	Dorset Road	Unrestricted (No Lines)	2	2	0	14.4	100%
03/10/2025	12:00	18	York Road	Unrestricted (No Lines)	1	1	0	7.5	100%
03/10/2025	12:00	23	York Road	Drop Kerb	1	1	0	9.4	100%
03/10/2025	12:00	24	York Road	Unrestricted (No Lines)	2	2	0	11.3	100%
03/10/2025	12:00	26	York Road	Unrestricted (No Lines)	1	1	0	7.6	100%
03/10/2025	12:00	28	York Road	Unrestricted (No Lines)	0	1	0	4.7	100%
03/10/2025	12:00	30	York Road	Unrestricted (No Lines)	2	1	1	11.4	50%
03/10/2025	12:00	32	York Road	Unrestricted (No Lines)	3	1	2	18	33%
03/10/2025	12:00	34	York Road	Unrestricted (No Lines)	3	1	2	16	33%
03/10/2025	12:00	36	York Road	Unrestricted (No Lines)	1	1	0	6.6	100%
03/10/2025	12:00	38	York Road	Unrestricted (No Lines)	2	2	0	10.5	100%
03/10/2025	12:00	50	York Road	Unrestricted (No Lines)	1	1	0	8.5	100%
03/10/2025	12:00	56	York Road	Unrestricted (No Lines)	3	1	2	15	33%
03/10/2025	12:00	73	York Road	Unrestricted (No Lines)	1	1	0	6.3	100%
03/10/2025	12:00	75	York Road	Unrestricted (No Lines)	1	1	0	6.5	100%
03/10/2025	12:00	91	York Road	Unrestricted (No Lines)	3	1	2	15.1	33%
03/10/2025	12:00	101	York Road	Unrestricted (No Lines)	1	1	0	8.4	100%
03/10/2025	12:00	103	York Road	Unrestricted (No Lines)	2	1	1	11.3	50%
03/10/2025	12:00	111	York Road	Unrestricted (No Lines)	1	1	0	9.4	100%
03/10/2025	12:00	113	York Road	Unrestricted (No Lines)	1	1	0	7.6	100%
03/10/2025	12:00	121	York Road	Unrestricted (No Lines)	2	1	1	11.4	50%
03/10/2025	12:00	125	York Road	Unrestricted (No Lines)	2	2	0	10.2	100%
03/10/2025	12:00	127	York Road	Unrestricted (No Lines)	0	1	0	3	100%
03/10/2025	12:00	131	York Road	Unrestricted (No Lines)	1	1	0	9.5	100%
03/10/2025	12:00	133	York Road	Unrestricted (No Lines)	1	1	0	7.8	100%
03/10/2025	12:00	144	Dorset Road	Unrestricted (No Lines)	4	3	1	22.5	75%
03/10/2025	12:00	146	Dorset Road	Unrestricted (No Lines)	1	1	0	8.5	100%
03/10/2025	12:00	148	Dorset Road	Unrestricted (No Lines)	1	1	0	7.6	100%
03/10/2025	12:00	150	Dorset Road	Unrestricted (No Lines)	1	1	0	5	100%
03/10/2025	12:00	157	Holland Avenue	Drop Kerb	1	1	0	8	100%
03/10/2025	12:00	158	Holland Avenue	Unrestricted (No Lines)	0	1	0	3.2	100%
03/10/2025	12:00	160	Holland Avenue	Unrestricted (No Lines)	1	1	0	5.1	100%
03/10/2025	12:00	162	Holland Avenue	Unrestricted (No Lines)	1	1	0	6.2	100%
03/10/2025	12:00	164	Holland Avenue	Unrestricted (No Lines)	15	7	8	75.6	47%
03/10/2025	12:00	166	Holland Avenue	Unrestricted (No Lines)	1	1	0	8.4	100%
03/10/2025	12:00	172	Holland Avenue	Unrestricted (No Lines)	3	1	2	15.1	33%
03/10/2025	12:00	178	Holland Avenue	Unrestricted (No Lines)	1	1	0	9.5	100%
03/10/2025	12:00	182	Holland Avenue	Unrestricted (No Lines)	2	1	1	12.2	50%
03/10/2025	12:00	190	Holland Avenue	Unrestricted (No Lines)	2	1	1	12.4	50%
03/10/2025	12:00	192	Holland Avenue	Unrestricted (No Lines)	1	1	0	6.3	100%
03/10/2025	12:00	213	Holland Avenue	Unrestricted (No Lines)	1	1	0	7.8	100%
03/10/2025	12:00	215	Holland Avenue	Unrestricted (No Lines)	1	1	0	8.9	100%
03/10/2025	12:00	216	Holland Avenue	Drop Kerb	1	1	0	9.5	100%
03/10/2025	12:00	217	Holland Avenue	Unrestricted (No Lines)	1	1	0	8.4	100%
03/10/2025	12:00	221	Holland Avenue	Unrestricted (No Lines)	0	1	0	3.3	100%
03/10/2025	12:00	233	Holland Avenue	Unrestricted (No Lines)	2	1	1	12.3	50%
03/10/2025	12:00	239	Holland Avenue	Unrestricted (No Lines)	1	1	0	8	100%
03/10/2025	12:00	241	Holland Avenue	Unrestricted (No Lines)	3	2	1	15.4	67%



Note: Overstress at some of the ID's are due to nose to tail parking and vehicles parked in less than 5mts spaces

Survey Date	Survey Timing	ID	Street Name	Parking Restriction	Parking Capacity (Round down)	Vehicles Parked	Empty Spaces	Length	Occupancy %
03/10/2025	12:00	253	Holland Avenue	Unrestricted (No Lines)	1	1	0	5	100%
03/10/2025	12:00	261	Holland Avenue	Unrestricted (No Lines)	2	1	1	14.5	50%
03/10/2025	12:00	263	Holland Avenue	Unrestricted (No Lines)	1	1	0	9.4	100%
03/10/2025	12:00	265	Holland Avenue	Unrestricted (No Lines)	1	1	0	8.4	100%
03/10/2025	12:00	267	Holland Avenue	Unrestricted (No Lines)	1	1	0	9.3	100%
03/10/2025	12:00	269	Holland Avenue	Unrestricted (No Lines)	2	1	1	11.9	50%
03/10/2025	12:00	273	Holland Avenue	Unrestricted (No Lines)	1	1	0	8.5	100%
03/10/2025	12:00	277	Holland Avenue	Unrestricted (No Lines)	1	1	0	9.5	100%
03/10/2025	12:00	279	Holland Avenue	Unrestricted (No Lines)	1	1	0	8.9	100%
03/10/2025	12:00	288	Dorset Road	Unrestricted (No Lines)	4	4	0	24	100%
03/10/2025	12:00	292	Dorset Road	Unrestricted (No Lines)	2	1	1	13.2	50%
03/10/2025	12:00	294	Dorset Road	Unrestricted (No Lines)	3	2	1	15.9	67%
03/10/2025	12:00	296	Dorset Road	Unrestricted (No Lines)	1	1	0	8.5	100%
03/10/2025	12:00	298	Dorset Road	Unrestricted (No Lines)	4	3	1	20.5	75%
03/10/2025	12:00	304	Bowling Way	Unrestricted (No Lines)	3	2	1	17.8	67%
03/10/2025	12:00	306	Bowling Way	Unrestricted (No Lines)	3	1	2	17.6	33%
03/10/2025	12:00	317	Brasted Close	Drop Kerb	3	1	2	15	33%
03/10/2025	12:00	318	Brasted Close	Unrestricted (No Lines)	0	1	0	3	100%
03/10/2025	12:00	322	Brasted Close	Unrestricted (No Lines)	0	1	0	4	100%
03/10/2025	12:00	329	Brasted Close	Unrestricted (No Lines)	0	1	0	2.2	100%
03/10/2025	12:00	333	Brasted Close	Unrestricted (No Lines)	0	1	0	3.8	100%
03/10/2025	12:00	349	Brasted Close	Unrestricted (No Lines)	6	4	2	33.9	67%
03/10/2025	12:00	355	Dorset Road	Unrestricted (No Lines)	6	3	3	30.4	50%
03/10/2025	12:00	374	Balmoral Way	Narrow	3	1	2	17.6	33%
03/10/2025	12:00	383	Balmoral Way	Unrestricted (No Lines)	6	1	5	30.7	17%
03/10/2025	12:00	430	Balmoral Way	Unrestricted (No Lines)	1	1	0	9.6	100%
03/10/2025	12:00	432	Balmoral Way	Unrestricted (No Lines)	2	1	1	10.4	50%
03/10/2025	12:00	434	Balmoral Way	Unrestricted (No Lines)	1	1	0	6.8	100%
03/10/2025	12:00	436	Balmoral Way	Unrestricted (No Lines)	3	1	2	19.7	33%
03/10/2025	12:00	452	Dorset Road	Unrestricted (No Lines)	3	2	1	16.1	67%
03/10/2025	12:00	454	Dorset Road	Unrestricted (No Lines)	6	5	1	31	83%
03/10/2025	12:00	509	Avenue Road	Unrestricted (No Lines)	5	4	1	26.7	80%
03/10/2025	12:00	511	Avenue Road	Unrestricted (No Lines)	2	3	0	14.8	150%
03/10/2025	12:00	512	Avenue Road	Drop Kerb	1	1	0	9.7	100%
03/10/2025	12:00	513	Avenue Road	Unrestricted (No Lines)	2	2	0	13.9	100%
03/10/2025	12:00	515	Avenue Road	Unrestricted (No Lines)	3	3	0	16.3	100%
03/10/2025	12:00	532	Avenue Road	Unrestricted (No Lines)	2	1	1	11.9	50%
03/10/2025	12:00	534	Avenue Road	Unrestricted (No Lines)	1	1	0	7.3	100%
03/10/2025	12:00	536	Avenue Road	Unrestricted (No Lines)	2	2	0	13.9	100%
03/10/2025	12:00	538	Avenue Road	Unrestricted (No Lines)	1	1	0	5.5	100%
03/10/2025	12:00	540	Avenue Road	Unrestricted (No Lines)	3	2	1	15	67%
03/10/2025	12:00	542	Avenue Road	Unrestricted (No Lines)	1	1	0	8.1	100%
03/10/2025	12:00	546	Avenue Road	Unrestricted (No Lines)	1	1	0	7.3	100%
03/10/2025	12:00	548	Avenue Road	Unrestricted (No Lines)	1	1	0	7.8	100%
03/10/2025	12:00	555	Dorset Road	Unrestricted (No Lines)	9	7	2	47	78%
03/10/2025	13:00	10	Dorset Road	Unrestricted (No Lines)	2	3	0	14.4	150%
03/10/2025	13:00	18	York Road	Unrestricted (No Lines)	1	1	0	7.5	100%
03/10/2025	13:00	19	York Road	Drop Kerb	1	1	0	5.5	100%
03/10/2025	13:00	21	York Road	Drop Kerb	1	1	0	5.7	100%



Note: Overstress at some of the ID's are due to nose to tail parking and vehicles parked in less than 5mts spaces

Survey Date	Survey Timing	ID	Street Name	Parking Restriction	Parking Capacity (Round down)	Vehicles Parked	Empty Spaces	Length	Occupancy %
03/10/2025	13:00	24	York Road	Unrestricted (No Lines)	2	2	0	11.3	100%
03/10/2025	13:00	26	York Road	Unrestricted (No Lines)	1	1	0	7.6	100%
03/10/2025	13:00	28	York Road	Unrestricted (No Lines)	0	1	0	4.7	100%
03/10/2025	13:00	30	York Road	Unrestricted (No Lines)	2	1	1	11.4	50%
03/10/2025	13:00	32	York Road	Unrestricted (No Lines)	3	2	1	18	67%
03/10/2025	13:00	34	York Road	Unrestricted (No Lines)	3	1	2	16	33%
03/10/2025	13:00	36	York Road	Unrestricted (No Lines)	1	1	0	6.6	100%
03/10/2025	13:00	38	York Road	Unrestricted (No Lines)	2	2	0	10.5	100%
03/10/2025	13:00	40	York Road	Unrestricted (No Lines)	1	1	0	8.4	100%
03/10/2025	13:00	50	York Road	Unrestricted (No Lines)	1	1	0	8.5	100%
03/10/2025	13:00	56	York Road	Unrestricted (No Lines)	3	1	2	15	33%
03/10/2025	13:00	73	York Road	Unrestricted (No Lines)	1	1	0	6.3	100%
03/10/2025	13:00	75	York Road	Unrestricted (No Lines)	1	1	0	6.5	100%
03/10/2025	13:00	91	York Road	Unrestricted (No Lines)	3	1	2	15.1	33%
03/10/2025	13:00	101	York Road	Unrestricted (No Lines)	1	1	0	8.4	100%
03/10/2025	13:00	103	York Road	Unrestricted (No Lines)	2	1	1	11.3	50%
03/10/2025	13:00	111	York Road	Unrestricted (No Lines)	1	1	0	9.4	100%
03/10/2025	13:00	113	York Road	Unrestricted (No Lines)	1	1	0	7.6	100%
03/10/2025	13:00	121	York Road	Unrestricted (No Lines)	2	1	1	11.4	50%
03/10/2025	13:00	125	York Road	Unrestricted (No Lines)	2	2	0	10.2	100%
03/10/2025	13:00	127	York Road	Unrestricted (No Lines)	0	1	0	3	100%
03/10/2025	13:00	129	York Road	Unrestricted (No Lines)	2	1	1	10.4	50%
03/10/2025	13:00	131	York Road	Unrestricted (No Lines)	1	1	0	9.5	100%
03/10/2025	13:00	133	York Road	Unrestricted (No Lines)	1	1	0	7.8	100%
03/10/2025	13:00	135	York Road	Unrestricted (No Lines)	1	1	0	5.7	100%
03/10/2025	13:00	144	Dorset Road	Unrestricted (No Lines)	4	3	1	22.5	75%
03/10/2025	13:00	146	Dorset Road	Unrestricted (No Lines)	1	2	0	8.5	200%
03/10/2025	13:00	148	Dorset Road	Unrestricted (No Lines)	1	1	0	7.6	100%
03/10/2025	13:00	150	Dorset Road	Unrestricted (No Lines)	1	1	0	5	100%
03/10/2025	13:00	158	Holland Avenue	Unrestricted (No Lines)	0	1	0	3.2	100%
03/10/2025	13:00	160	Holland Avenue	Unrestricted (No Lines)	1	1	0	5.1	100%
03/10/2025	13:00	162	Holland Avenue	Unrestricted (No Lines)	1	1	0	6.2	100%
03/10/2025	13:00	164	Holland Avenue	Unrestricted (No Lines)	15	7	8	75.6	47%
03/10/2025	13:00	166	Holland Avenue	Unrestricted (No Lines)	1	1	0	8.4	100%
03/10/2025	13:00	168	Holland Avenue	Unrestricted (No Lines)	1	1	0	8.3	100%
03/10/2025	13:00	172	Holland Avenue	Unrestricted (No Lines)	3	1	2	15.1	33%
03/10/2025	13:00	178	Holland Avenue	Unrestricted (No Lines)	1	1	0	9.5	100%
03/10/2025	13:00	182	Holland Avenue	Unrestricted (No Lines)	2	1	1	12.2	50%
03/10/2025	13:00	190	Holland Avenue	Unrestricted (No Lines)	2	1	1	12.4	50%
03/10/2025	13:00	192	Holland Avenue	Unrestricted (No Lines)	1	1	0	6.3	100%
03/10/2025	13:00	213	Holland Avenue	Unrestricted (No Lines)	1	1	0	7.8	100%
03/10/2025	13:00	215	Holland Avenue	Unrestricted (No Lines)	1	1	0	8.9	100%
03/10/2025	13:00	216	Holland Avenue	Drop Kerb	1	1	0	9.5	100%
03/10/2025	13:00	217	Holland Avenue	Unrestricted (No Lines)	1	1	0	8.4	100%
03/10/2025	13:00	221	Holland Avenue	Unrestricted (No Lines)	0	1	0	3.3	100%
03/10/2025	13:00	233	Holland Avenue	Unrestricted (No Lines)	2	1	1	12.3	50%
03/10/2025	13:00	239	Holland Avenue	Unrestricted (No Lines)	1	1	0	8	100%
03/10/2025	13:00	241	Holland Avenue	Unrestricted (No Lines)	3	1	2	15.4	33%
03/10/2025	13:00	253	Holland Avenue	Unrestricted (No Lines)	1	1	0	5	100%



Note: Overstress at some of the ID's are due to nose to tail parking and vehicles parked in less than 5mts spaces

Survey Date	Survey Timing	ID	Street Name	Parking Restriction	Parking Capacity (Round down)	Vehicles Parked	Empty Spaces	Length	Occupancy %
03/10/2025	13:00	261	Holland Avenue	Unrestricted (No Lines)	2	1	1	14.5	50%
03/10/2025	13:00	265	Holland Avenue	Unrestricted (No Lines)	1	1	0	8.4	100%
03/10/2025	13:00	267	Holland Avenue	Unrestricted (No Lines)	1	1	0	9.3	100%
03/10/2025	13:00	273	Holland Avenue	Unrestricted (No Lines)	1	1	0	8.5	100%
03/10/2025	13:00	277	Holland Avenue	Unrestricted (No Lines)	1	1	0	9.5	100%
03/10/2025	13:00	279	Holland Avenue	Unrestricted (No Lines)	1	1	0	8.9	100%
03/10/2025	13:00	288	Dorset Road	Unrestricted (No Lines)	4	4	0	24	100%
03/10/2025	13:00	292	Dorset Road	Unrestricted (No Lines)	2	2	0	13.2	100%
03/10/2025	13:00	294	Dorset Road	Unrestricted (No Lines)	3	2	1	15.9	67%
03/10/2025	13:00	296	Dorset Road	Unrestricted (No Lines)	1	1	0	8.5	100%
03/10/2025	13:00	298	Dorset Road	Unrestricted (No Lines)	4	3	1	20.5	75%
03/10/2025	13:00	304	Bowling Way	Unrestricted (No Lines)	3	2	1	17.8	67%
03/10/2025	13:00	306	Bowling Way	Unrestricted (No Lines)	3	1	2	17.6	33%
03/10/2025	13:00	317	Brasted Close	Drop Kerb	3	1	2	15	33%
03/10/2025	13:00	318	Brasted Close	Unrestricted (No Lines)	0	1	0	3	100%
03/10/2025	13:00	322	Brasted Close	Unrestricted (No Lines)	0	1	0	4	100%
03/10/2025	13:00	333	Brasted Close	Unrestricted (No Lines)	0	1	0	3.8	100%
03/10/2025	13:00	349	Brasted Close	Unrestricted (No Lines)	6	4	2	33.9	67%
03/10/2025	13:00	374	Balmoral Way	Narrow	3	1	2	17.6	33%
03/10/2025	13:00	430	Balmoral Way	Unrestricted (No Lines)	1	1	0	9.6	100%
03/10/2025	13:00	432	Balmoral Way	Unrestricted (No Lines)	2	1	1	10.4	50%
03/10/2025	13:00	434	Balmoral Way	Unrestricted (No Lines)	1	1	0	6.8	100%
03/10/2025	13:00	436	Balmoral Way	Unrestricted (No Lines)	3	1	2	19.7	33%
03/10/2025	13:00	452	Dorset Road	Unrestricted (No Lines)	3	2	1	16.1	67%
03/10/2025	13:00	454	Dorset Road	Unrestricted (No Lines)	6	5	1	31	83%
03/10/2025	13:00	509	Avenue Road	Unrestricted (No Lines)	5	5	0	26.7	100%
03/10/2025	13:00	511	Avenue Road	Unrestricted (No Lines)	2	3	0	14.8	150%
03/10/2025	13:00	513	Avenue Road	Unrestricted (No Lines)	2	2	0	13.9	100%
03/10/2025	13:00	515	Avenue Road	Unrestricted (No Lines)	3	3	0	16.3	100%
03/10/2025	13:00	516	Avenue Road	Drop Kerb	1	1	0	9.2	100%
03/10/2025	13:00	532	Avenue Road	Unrestricted (No Lines)	2	1	1	11.9	50%
03/10/2025	13:00	534	Avenue Road	Unrestricted (No Lines)	1	1	0	7.3	100%
03/10/2025	13:00	536	Avenue Road	Unrestricted (No Lines)	2	2	0	13.9	100%
03/10/2025	13:00	538	Avenue Road	Unrestricted (No Lines)	1	1	0	5.5	100%
03/10/2025	13:00	540	Avenue Road	Unrestricted (No Lines)	3	2	1	15	67%
03/10/2025	13:00	542	Avenue Road	Unrestricted (No Lines)	1	1	0	8.1	100%
03/10/2025	13:00	546	Avenue Road	Unrestricted (No Lines)	1	1	0	7.3	100%
03/10/2025	13:00	548	Avenue Road	Unrestricted (No Lines)	1	1	0	7.8	100%
03/10/2025	13:00	555	Dorset Road	Unrestricted (No Lines)	9	7	2	47	78%

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]


[illegible]



Project ID and Name: IW0451 Dorset Road, Sutton
Survey Type: Parking Beats

Survey Dates: 01/10/2025, 02/10/2025 & 03/10/2025
Survey Days: Wednesday, Thursday & Friday

Street Name	Parking Restriction	Length (mts)	Parking Capacity	No. of Vehicles Parked					No. of Empty Spaces					Occupancy %				
				Wednesday	Thursday	Friday	Friday	Friday	Wednesday	Thursday	Friday	Friday	Friday	Wednesday	Thursday	Friday	Friday	Friday
				00:30	00:30	10:00	12:00	13:00	00:30	00:30	10:00	12:00	13:00	00:30	00:30	10:00	12:00	13:00
All Streets	Bus Stop	17.9	3	0	0	0	0	0	3	3	3	3	3	0%	0%	0%	0%	0%
	Double Red Lines	71.6	9	0	0	0	0	0	9	9	9	9	9	0%	0%	0%	0%	0%
	Double Yellow Lines	397.3	56	0	0	1	0	0	56	56	55	56	56	0%	0%	2%	0%	0%
	Drop Kerb	1616.1	227	4	2	5	5	5	223	225	222	222	222	2%	1%	2%	2%	2%
	Keep Clear	22.8	2	0	0	0	0	0	2	2	2	2	2	0%	0%	0%	0%	0%
	Narrow	461.9	66	0	0	0	1	1	66	66	66	65	65	0%	0%	0%	2%	2%
	Pedestrian Crossing	81.8	3	0	0	0	0	0	3	3	3	3	3	0%	0%	0%	0%	0%
	School Keep Clear	52.9	5	0	0	0	0	0	5	5	5	5	5	0%	0%	0%	0%	0%
	Single Yellow Lines	161.9	23	0	0	0	0	0	23	23	23	23	23	0%	0%	0%	0%	0%
	Unrestricted (No Lines)	1782.3	269	70	74	125	133	134	199	195	144	136	135	26%	28%	46%	49%	50%
All Streets - Total				74	76	131	139	140	589	587	532	524	523					

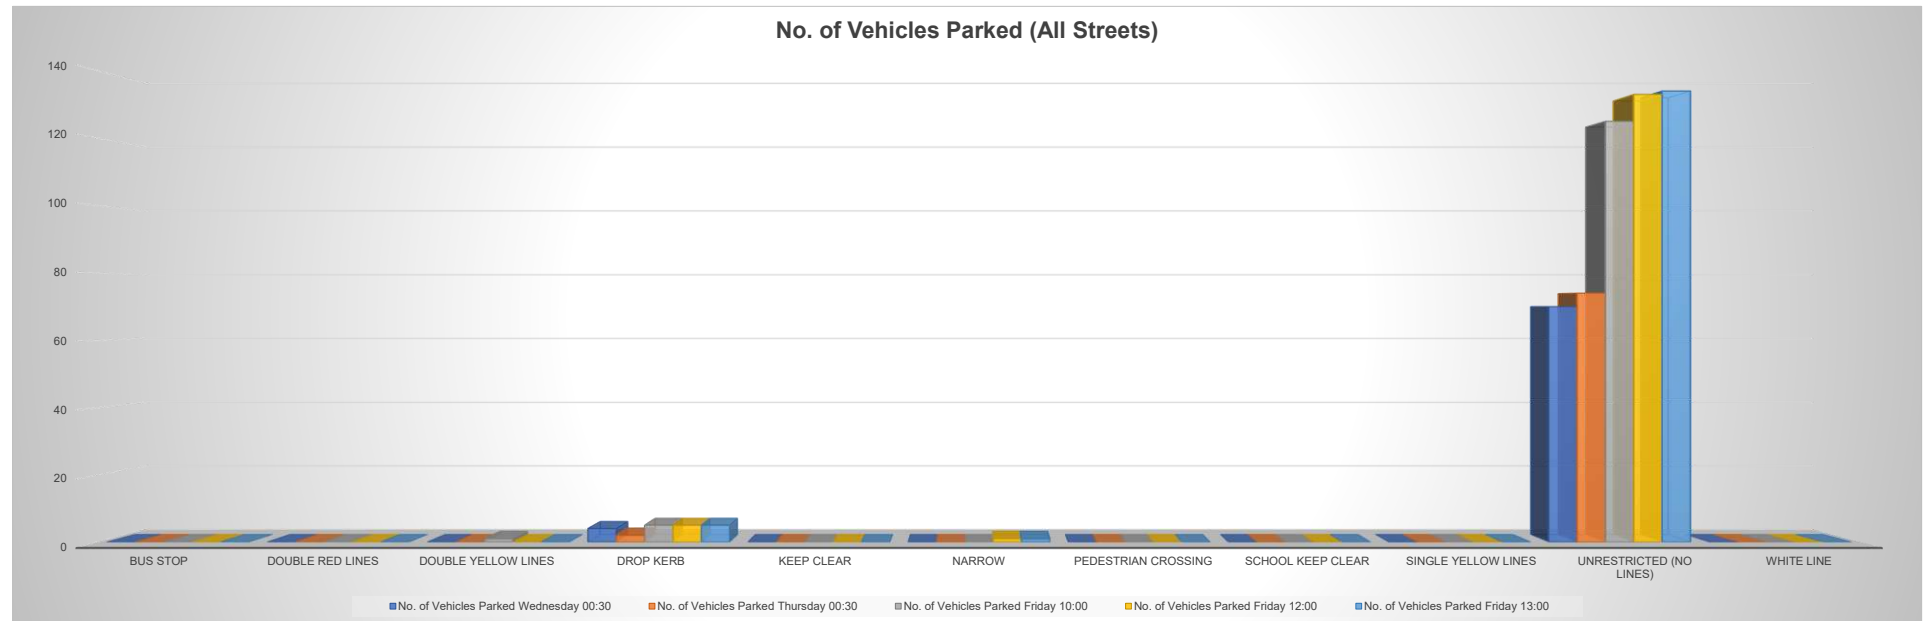




Project ID and Name: IW0451 Dorset Road, Sutton
Survey Type: Parking Beats

Survey Dates: 01/10/2025, 02/10/2025 & 03/10/2025
Survey Days: Wednesday, Thursday & Friday

Street Name	Parking Restriction	Length (mts)	Parking Capacity	No. of Vehicles Parked					No. of Empty Spaces					Occupancy %				
				Wednesday	Thursday	Friday	Friday	Friday	Wednesday	Thursday	Friday	Friday	Friday	Wednesday	Thursday	Friday	Friday	Friday
				00:30	00:30	10:00	12:00	13:00	00:30	00:30	10:00	12:00	13:00	00:30	00:30	10:00	12:00	13:00
All Streets (Legal Spaces)	Unrestricted (No Lines)	1782.3	269	70	74	125	133	134	199	195	144	136	135	26%	28%	46%	49%	50%
All Streets (Legal Spaces) - Total		1782.3	269	70	74	125	133	134	199	195	144	136	135					

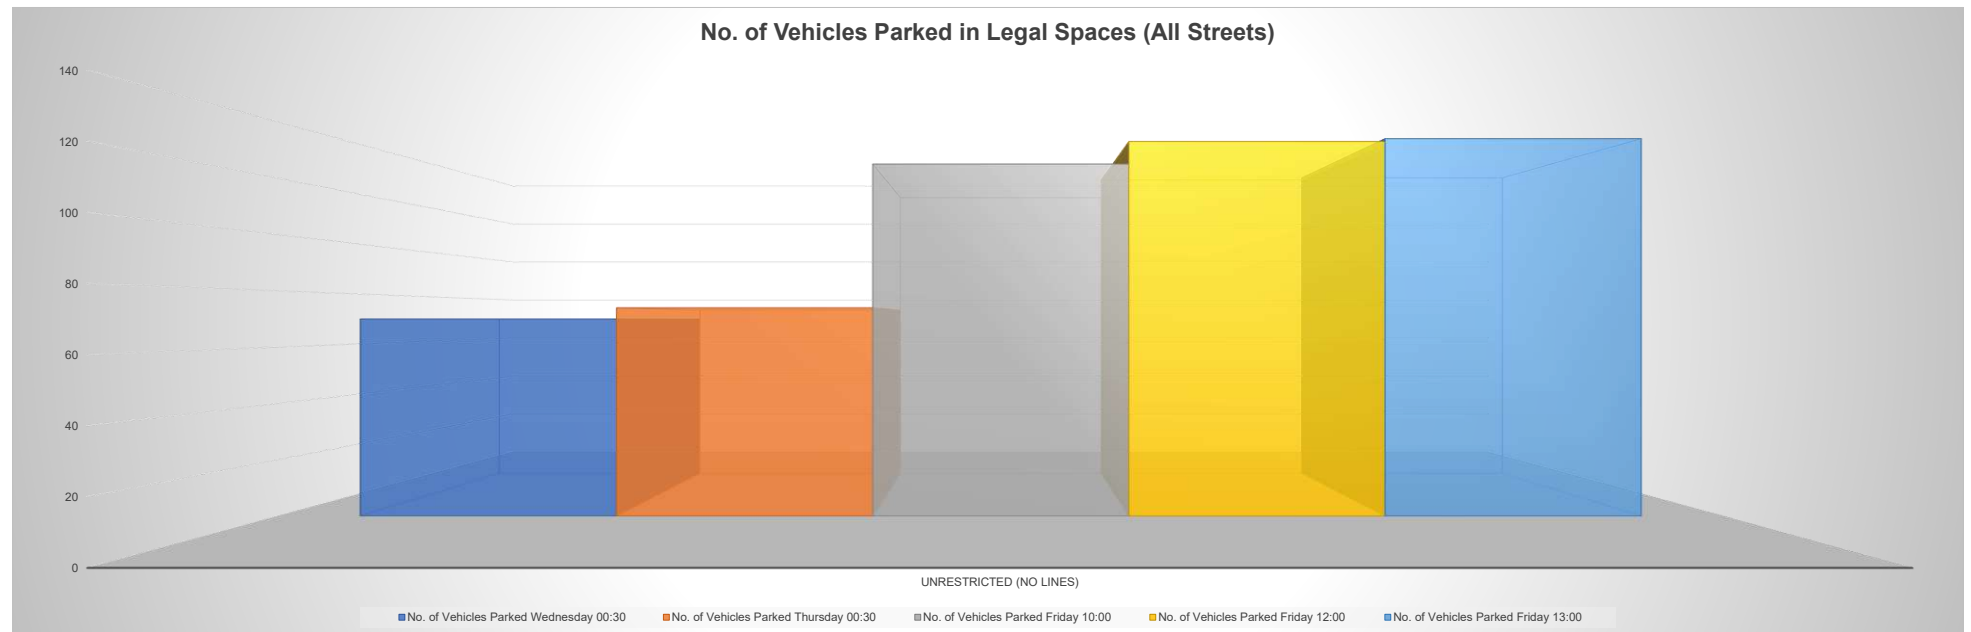

Appendix D

BASMA Travel Questionnaire Data													
Date	Home Postcode	Journey Start	Attend Days	Purpose	Journey Time	Journey Distance	Main Transport	Parking Location	Car Passengers	Alt Transport	Community Services		Notes
04/04/2025	CR0 2EW	Work	Friday	Prayer	16-30minutes	1-2 miles	Drive alone	Car Park	3	Walk	Community Use, Classes, Ladies Get together, Tutoring, Youth Club, Interfaith Work, Counselling		CS
11/04/2025	CR8 3PU	Home	Friday	Prayer	0-15minutes	>2 miles	Car share- driver	On-Street		Bus	Youth Club		
04/04/2025	CRO 2BN	Home	Friday	Prayer	16-30minutes	>2 miles	Drive alone	On-Street	2	Bus	Community Use, Classes, Youth Club, Counselling, Ladies Get together, Tutoring, Interfaith Work		DA
11/04/2025	KT17 2NT	Home	Friday	Prayer	0-15minutes	1-2 miles	Car share- driver	Car Park	4	Bus	Community Use, Classes, Youth Club, Counselling		
11/04/2025	KT17 3DX	Work	Friday	Prayer	0-15minutes	1-2 miles	Car share- driver	On-Street	2				
11/04/2025	KT17 3DX	Work	Friday	Prayer	0-15minutes	1-2 miles	Car share- driver	On-Street	2	Bus	Community Use, Classes, Ladies Get together		
04/04/2025	KT173E5	Home	Friday	Prayer	0-15minutes	0-1 mile	Car share	On-Street	3	Walk	Community Use, Classes, Ladies Get together		
4th Apr 2025	KT173EG	Home	Friday	Prayer	0-15minutes	1-2 miles	Drive alone	On-Street Northdown Rad (Cheam side o Burden lane Driveway)	3	Walk	Community Use, Classes, Ladies Get together, Counselling, Keep fit		Spots. CY
11/04/2025	KT20 5HJ	Home	Friday	Prayer	16-30minutes	>2 miles	Car share-passenger r	On-Street	4	Taxi			
11/04/2025	KT20 6EB	Work	Friday	Prayer	0-15minutes	1-2 miles	Car share- driver	On-Street	4	Walk	Youth Club		
11/04/2025	KT20 6EB	Home	Friday	Prayer	0-15minutes	1-2 miles	Drivealone	On-Street	2	Bus	Community Use		
11/04/2025	KT20 6EB	Home	Friday	Prayer	0-15minutes	1-2 miles	Drivealone	On-Street	2				
04/05/2025	KT4 8RX	Home	Friday	Prayer	0-15minutes	1-2 miles	Drive alone	On-Street North- Down	1	Walk	Classes, Counselling, Ladies Get together		
11/04/2025	SM1 2AY	Home	Friday	Prayer	0-15minutes	1-2 miles	Cycle			Walk, Cycle	Community Use, Classes, Interfaith Work		
11/04/2025	SM1 2AY	Home	Friday	Prayer	0-15minutes	1-2 miles	Cycle			Walk, Cycle	Community Use, Classes, Youth Club		
11/04/2025	SM1 2DJ	Home	Friday	Prayer	0-15minutes	1-2 miles	Car share- driver	On-Street	4	Walk, Taxi	Youth Club, Ladies Get together, Interfaith Work		
11/04/2025	SM2 1PS	Work	Friday	Prayer	0-15minutes	0-1 mile	Walk	N/A		N/A	Community Use, Classes, Counselling Tutoring, Interfaith		
11/04/2025	SM2 5BB	Home	Friday	Prayer	0-15minutes	0-1 mile	Car share- passenger r, Walk	On-Street	3	Walk	Youth Club		
04/04/2025	SM2 5BG	Home	Friday	Prayer	0-15minutes	0-1 mile	Walk	On-Street	1	Walk	Community Use, Classes, Youth Club, Counselling, Ladies Get together, Tutoring		
11/04/2025	SM2 5BG	Home	Monday, Tuesday, Wednesday, Thursday, Friday	Prayer, Circles, Keep fit	0-15minutes	0-1 mile	Walk				Community Use, Classes, Counselling, Tutoring, Interfaith Work		
11/04/2025	SM2 5LQ	Home	Friday	Prayer	0-15minutes	1-2 miles	Car share- driver	On-Street	2	Bus, Walk, Cycle	Community Use, Classes, Tutoring, Interfaith Work		
11/04/2025	SM2 5QD	Home	Friday	Prayer	0-15minutes	0-1 mile	Car share-passenger r	On-Street	2	Other (Specify)	Youth Club, Other		
11/04/2025	SM2 6AG	Home	Friday	Prayer	31-45minutes	1-2 miles	Car share-passenger r	On-Street	2		Community Use, Classes, Ladies Get together, Interfaith Work		
11.04-25	SM2 6BE	Home	Friday	Prayer	0-15minutes	0-1 mile	Walk	On-Street	1	Walk	Classes, Counselling, Ladies Get together, Tutoring, Interfaith Work, Volunteering, Ladies self-defence, kids coding, Eid and Ramadan activities, health clinics, legal aid, scholar/Islamic inquiry, financial help/zakah, gardening club (edibles)		with 4 children. Come of them is a teen)
11-00-25	Sm2 6BG	Home	Friday	Prayer	0-15minutes	0-1 mile	Walk	On-Street	1	Walk	Community Use, Classes, Youth Club, Ladies Get together, Tutoring, Interfaith Work, Counselling		
11/06/2025	SM2 6BG	Home	Friday	Prayer	0-15minutes	0-1 mile	Walk	On-Street	1	Walk	Community Use		
11/04/2025	SM2 6BH	Home	Friday	Prayer	0-15minutes	0-1 mile	Walk						DA
11/04/2025	SM2 6BZ	Home	Friday	Prayer	0-15minutes	0-1 mile	Walk			Walk	Community Use, Classes, Counselling, Tutoring, Interfaith Work		
04/04/2025	SM2 6DR	Home	Mon, Wed, Fri	Prayer	0-15minutes	0-1 mile	Walk	On-Street	2	Walk	Community Use, Counselling, Ladies Get together, Interfaith Work		
11/04/2025	SM2 6DS	Home	Friday	Prayer	0-15minutes	0-1 mile	Walk			Walk	Community Use		
11/04/2025	SM2 6DS	Home	Friday	Prayer	0-15minutes	0-1 mile	Car share-passenger r	On-Street	3	Walk	Community Use		
11/04/2025	SM2 6DS	Home	Friday	Prayer	0-15minutes	0-1 mile	Car share- driver	On-Street	3	Walk	Community Use		
11/04/2025	SM2 6DU	Home	Friday	Prayer	0-15minutes	0-1 mile	Walk				Community Use		
11/04/2025	SM2 6DU	Home	Friday	Prayer	0-15minutes	0-1 mile	Walk				Community Use		
11/04/2025	SM2 6DU	Home	Friday	Prayer	0-15minutes	0-1 mile	Walk			Bus, Train, Walk	Football Class		
11/04/2025	SM2 6DY	Home	Friday	Prayer	0-15minutes	0-1 mile	Walk	On-Street	1	Walk	Community Use, Ladies Get together		
	SM2 6DY	Home	Friday, Saturday, Sunday	Prayer	0-15minutes	0-1 mile	Walk				Community Use, Classes, Youth Club		
04-Apr	SM2 6EJ	Home	Friday	Prayer	0-15minutes	0-1 mile	Walk	On-Street	1	Walk	Counselling		
04/04/2025	Sm2 6EQ	Work	Friday	Prayer	31-45minutes	1-2 miles	Bus	On-Street	4	Walk	Community Use		es
12/04/2025	SM2 6ER	Home	Friday	Prayer	0-15minutes	0-1 mile	Walk				Community Use, Ladies Get together		
11/04/2025	SM2 6HE	Home	Monday, Friday, Saturday, Sunday	Prayer	0-15minutes	0-1 mile	Walk						
11/04/2025	SM2 6HG	Home	Friday	Prayer	0-15minutes	0-1 mile	Walk			Walk	Counselling		
11/04/2025	SM2 6HG	Home	Friday	Prayer	16-30minutes	1-2 miles	Drive alone	On-Street	1	Bus, Walk	Community Use, Classes, Interfaith Work		
	SM2 6HH	Home	Monday, Tuesday, Wednesday, Thursday, Friday, Saturday, Sunday	Prayer		0-1 mile	Walk				Community Use, Classes, Youth Club, Counselling, Ladies Get together, Tutoring, Interfaith Work		
11/04/2025	SM2 6HH	Home	Friday	Prayer	0-15minutes	0-1 mile	Drivealone			Bus	Community Use		
11/04/2025	SM2 6HN	Home	Friday	Prayer	0-15minutes	1-2 miles	Taxi	On-Street	1	CAR	Community Use		
05/04/2025	SM2 6HN	Home	Friday, Saturday, Sunday	Prayer	0-15minutes	0-1 mile	Walk				Community Use, Classes, Youth Club, Counselling, Tutoring, Youth Club, Interfaith Work		
05/04/2025	SM2 6HN	Home	Friday, Saturday, Sunday	Prayer	0-15minutes	0-1 mile	Walk			Walk	Youth Club		
11/04/2025	SM2 6HN	Home	Friday	Prayer	0-15minutes	0-1 mile	Walk			Bus	Community Use, Classes, Youth Club, Counselling, Ladies Get together, Tutoring, Interfaith Work		
11/04/2025	SM2 6HN	Home	Friday	Prayer	0-15minutes	0-1 mile	Walk			Bus	Community Use, Classes, Youth Club, Counselling, Ladies Get together, Tutoring, Interfaith Work		
11/04/2025	Sm2 6HS	Home	Friday	Prayer	0-15minutes	0-1 mile	Walk	On-Street	1	Walk	Community Use		FARZAN A
04/04/2025	SM2 6HT	Home	Monday, Tuesday, Wednesday, Thursday, Friday, Saturday, Sunday	Prayer	0-15minutes	0-1 mile	Walk	N/A	N/A	Walk	Community Use, Classes, Youth Club, Counselling, Ladies Get together, Tutoring, Interfaith Work		
11/04/2025	SM2 6HT	Home	Monday, Tuesday, Wednesday, Thursday, Friday, Saturday, Sunday	Prayer	0-15minutes	0-1 mile	Walk			Walk	Community Use, Classes, Youth Club, Counselling, Ladies Get together, Tutoring, Interfaith Work		
11/04/2025	SM2 6HW	Home	Friday	Prayer	0-15minutes	0-1 mile	Walk	On-Street	1	Walk	Community Use, Youth Club, Ladies Get together, Tutoring		
07/04/2025	SM2 6HW	Home	Monday, Tuesday, Wednesday, Thursday, Friday, Saturday, Sunday	Prayer	0-15minutes	0-1 mile	Walk	Car Park	N/A		Community Use, Youth Club, Counselling, Interfaith Work		
11/04/2025	SM2 6HW	Home	Friday	Prayer	0-15minutes	0-1 mile	Walk			Walk	Tutoring		
11/04/2025	SM2 6HW	Home	Friday	Prayer	0-15minutes	0-1 mile	Walk			Walk	Community Use		
11/04/2025	SM2 6HW	Home	Friday	Prayer	0-15minutes	0-1 mile	Walk			Walk	Community Use, Youth Club		
11/04/2025	SM2 6HW	Home	Friday	Prayer	16-30minutes	0-1 mile	Walk			Walk	Community Use, Classes, Special events		
11/04/2025	SM2 6HW	Home	Friday	Prayer	0-15minutes	0-1 mile	Walk			Walk	Community Use, Youth Club		

11/04/2025	SM2 6JE	Home	Monday, Tuesday, Wednesday, Thursday, Friday, Saturday, Sunday	Prayer	0-15minutes	0-1 mile	Walk				Walk	Community Use, Classes, Youth Club, Counselling, Ladies Get together, Tutoring, Interfaith Work	
11/04/2025	SM2 6JE	Home	Friday, Saturday, Sunday	Prayer	0-15minutes	0-1 mile	Walk				Walk	Community Use, Classes, Youth Club, Counselling, Ladies Get together, Tutoring, Interfaith Work	
11/04/2025	SM2 6JQ	Home	Friday	Prayer	0-15minutes	0-1 mile	Walk	Car Park	5		Walk	Community Use	
	SM2 6PD	Home	Friday	Prayer	0-15minutes	0-1 mile	Walk	On-Street	N/A		Walk	Community Use, Classes, Youth Club, Interfaith Work, Counselling, Ladies Get together, Tutoring	
11/04/2025	SM2 6PD	Home	Friday	Prayer	0-15minutes	0-1 mile	Walk				Bus	Community Use, Classes, Youth Club, Counselling, Ladies Get together, Tutoring, Interfaith Work	
04/04/2025	SM2 6PD	Home	Monday, Tuesday, Wednesday, Thursday, Friday, Saturday, Sunday	Prayer	0-15minutes	0-1 mile	Walk				Walk	Tutoring,	
11/04/2025	SM2 6PD	Home	Friday	Prayer	0-15minutes	0-1 mile	Walk				Walk	Community Use, Classes, Youth Club, Counselling, Ladies Get together, Tutoring, Interfaith Work	
11/04/2025	SM2 6PD	Home	Friday	Prayer	0-15minutes	0-1 mile	Walk				Bus	Community Use, Classes, Youth Club, Counselling, Ladies Get together, Tutoring, Interfaith Work	
11/04/2025	SM2 6QN	Home	Friday	Prayer	16-30minutes	1-2 miles	Walk				Cycle	Community Use	
06/04/2025	SM2 6QY	Home	Saturday, Sunday	Prayer	31-45minutes	1-2 miles	Car share - driver, Walk				Walk	Community Use, Counselling	
06/04/2025	SM2 6RB	Home	Saturday, Sunday	Prayer	0-15minutes	0-1 mile	Walk					Community Use, Classes, Interfaith Work	
11/04/2025	SM2 6SG	Home	Friday	Prayer	0-15minutes	0-1 mile	Walk	On-Street	0		Walk	Youth Club	
43-25	SM2 7 DB.	Home	Friday	TARAWA EH	0-15minutes	0-1 mile	Drive alone	Car Park	04-May		Walk	Community Use, Counselling, Tajweed classes	Blue Badge Holder
11/04/2025	SM2 7BP	Home	Friday	Prayer	0-15minutes	0-1 mile	Car share-passenge r	On-Street	2			Community Use	
06/04/2025	SM2 7DA	Home	Saturday, Sunday	Prayer	0-15minutes	0-1 mile	Walk				Walk		
11/04/2025	SM2 7DB	Home	Friday	Prayer	0-15minutes	0-1 mile	Walk						
11/04/2025	SM2 7DP	Home	Friday	Prayer	0-15minutes	1-2 miles	Car share- driver	On-Street	2		Walk	Community Use, Classes, Youth Club, Interfaith Work	
11/04/2025	SM2 7DU	Home	Friday	Prayer	0-15minutes	0-1 mile	Walk				Walk	Only Prayer	
11/04/2025	SM2 7DZ	Home	Friday	Prayer	0-15minutes	0-1 mile	Walk				Walk		
11/04/2025	SM2 7EQ	Home	Friday	Prayer	0-15minutes	0-1 mile	Walk				Walk, Cycle	Community Use, Classes, Youth Club, Tutoring, Interfaith	
11/04/2025	SM2 7EQ	Home	Friday	Prayer	0-15minutes	0-1 mile	Walk				Walk, Cycle	Community Use, Tutoring	
11/04/2025	SM2 7ES	Home	Friday, Saturday	Prayer	0-15minutes	1-2 miles	Car share- driver				Walk	Community Use, Classes, Interfaith Work	
11/04/2025	SM2 7HA	Home	Friday	Prayer	0-15minutes	0-1 mile	Car share- driver	On-Street	3		Walk	Community Use, Classes	
11/04/2025	SM2 7LN	Home	Friday	Prayer	0-15minutes	1-2 miles	Car share- driver	On-Street	3		Cycle	Community Use, Classes	
11/04/2025	SM2 7NE	Home	Friday	Prayer	0-15minutes	1-2 miles	Car share- driver	Car Park (Disabled)	3		Walk, Taxi	Tutoring, Interfaith Work	
11/04/2025	SM2 7PH	Home	Friday	Prayer	0-15minutes	0-1 mile	Walk				Walk	Community Use, Youth Club, Ladies Get together, Tutoring	
11/04/2025	SM2 7PP	Home	Friday	Prayer	0-15minutes	0-1 mile	Drive alone	On-Street Northdown Road	1		Walk	Community Use, Classes, Ladies Get together, Tutoring, Youth Club, Interfaith Work, Counselling	DA
11/04/2025	SM2 9QF	Home	Friday	Prayer	31-45minutes	>2 miles	Walk				Bus, Walk	Community Use, Classes	
11/04/2024	SM2 GER	Home	Friday	Prayer	0-15minutes	1-2 miles	Car share	On-Street	4		Walk	Community Use, Ladies Get together	CS
	SM2 TEH	Home	Friday	Prayer	16-30	>2 miles							
	SM25RD	Home	Friday	Prayer	0-15minutes	0-1 mile	Car share	On-Street	1		Walk	Counselling, Ladies Get together	Wire did you start
11/04/2025	SM3 3TH	Home	Friday	Prayer	0-15minutes	1-2 miles	Car share- driver	On-Street	2				
11/04/2025	SM3 8ED	Home	Friday	Prayer	0-15minutes	1-2 miles	Car share-passenge r	On-Street	2		Walk	Tutoring	
11/04/2025	SM3 8ED	Home	Friday	Prayer	0-15minutes	1-2 miles	Car share- driver	On-Street	3		Bus, Walk	Community Use, Youth Club	
11/04/2025	SM3 8QY	Work	Friday	Prayer	31-45minutes	>2 miles	Walk	N/A	N/A		Bus	Classes, Youth Club, Counselling, Tutoring	
11/04/2025	SM3 8SP	Home	Friday	Prayer	0-15minutes	>2 miles	Drivealone		2			Community Use	
11/04/2025	SM3 9AZ	Work	Friday	Prayer	0-15minutes	>2 miles	Car share-passenge r	On-Street	3		Walk, Taxi	Community Use, Classes, Youth Club, Counselling, Ladies Get together, Tutoring, Interfaith Work, Marriage	
11/04/2025	SM3 9AZ	Home	Friday	Prayer	0-15minutes	>2 miles	Car share- driver	On-Street	3		Taxi	Classes	
08/04/2025	SM3 9LF	Home	Friday	Prayer	0-15minutes	>2 miles	Drivealone	On-Street	1			Community Use, Interfaith Work	
11/04/2025	SM3 9QF	Home	Friday	Prayer	0-15minutes	>2 miles	Car share- passenge r, Walk	On-Street	3		Bus	Community Use, Interfaith Work	
04/04/2025	SM3 9RT	Home	Friday	Prayer	0-15minutes	>2 miles	Drive alone	On-Street	1		Walk	Community Use, Classes, Ladies Get together	
11/04/2025	SM3 9UW	Home	Friday	Prayer	0-15minutes	1-2 miles	Car share- driver	On-Street	2		Cycle, Lift share / Car Share	Community Use, Classes, Sports, Study Circle	
11/04/2025	SM4 4QG	Home	Friday	Prayer	0-15minutes	>2 miles	Car share-passenge r	On-Street	6		Bus	Community Use, Classes	
11/04/2025	SM3 4EQ	Home	Friday	Prayer	16-30minutes	1-2 miles	Car share- driver		2		Bus		
11/04/2025	SM7 2BB	Home	Friday	Prayer	0-15minutes	>2 miles	Car share- driver	On-Street	3		Train	Community Use, Youth Club, Tutoring	
11/04/2025	SM7 2HX	Home	Friday	Prayer	0-15minutes	1-2 miles	Drive alone	On-Street	1		Walk	Community Use, Classes, Ladies Get together	
11/04/2025	SM7 2JQ	Home	Friday	Prayer	0-15minutes	0-1 mile	Car share-passenge r	Car Park	3		Bus, Walk	Community Use, Classes, Interfaith Work	
11/04/2025	SM7 2JQ	Home	Friday, Saturday	Prayer	0-15minutes	>2 miles	Car share- driver	Car Park	3		Bus, Walk	Community Use, Classes, Interfaith Work	
11/04/2025	SM7 2LD	Home	Friday	Prayer	0-15minutes	>2 miles	Car share-passenge r	On-Street	2		Cycle	Community Use	
11/04/2025	SM7 2LD	Home	Friday	Prayer	0-15minutes	>2 miles	Car share- driver	On-Street	2			Community Use, Counselling	
11/04/2025	SM7 2SQ	Home	Friday	Prayer	0-15minutes	>2 miles	Car share-passenge r	Car Park	3		Bus	Community Use, Classes, Interfaith Work	
11/04/2025	SM7 3DD	Home	Friday	Prayer	16-30minutes	1-2 miles	Bus, Walk						
11/04/2025	SM7 7HE	Home	Friday	Prayer	0-15minutes	0-1 mile	Car share	On-Street	3		Bus	Ladies Get together	Car share
11/04/2025	SW2 9JR	Home	Friday	Prayer	16-30minutes	>2 miles	Car share- driver	Car Park	6				
11/04/2025	SW20 9JK	Home	Friday	Prayer	0-15minutes	>2 miles	Car share- driver	On-Street	6		Bus	Community Use, Youth Club, Interfaith Work	
11/04/2025	W10 4RE	Work	Friday	Prayer	0-15minutes	0-1 mile	Walk					Community Use, Youth Club	

Appendix E

DESIGN & ACCESS STATEMENT FOR:

The Proposed Change Of The Former Sutton Ambulance Station [Planning Use Class Sui Generis] To A Community Hub With Prayer Facility [Planning Use Class F.1 & F.2]
At: Dorset Road, Sutton, SM2 6JH

3.5 Hours of Operation

Proposed operational hours:

- Community Use: Monday to Sunday: 7:00 AM – 10:00 PM
- Prayer Use varies according to the solar cycle upto 11.00 PM

3.6 Proposed Timetable of Community Uses & Numbers

Activity	Numbers Attending	Duration
Monday		
Ladies Keep Fit Classes	12 - 15	10:00-11:00
Men's Study Circle	10 - 12	19:00-20:00
Tuesday		
Ladies Study Circle	12-15	10:00-11:00
Health and wellbeing sessions, advice & counselling sessions, (Open to all)	8-10	19:00 - 20:00
Wednesday		
Ladies counselling session	8-12	10:00-12:00
Multi Faith events (Up to maximum 4 times a Year)	Varies up to 50	17:30-19:30
Thursday		
Seniors Lunch Club (60+)	12	13:30 -14:30
Girls and young women (16-23) get together, counselling,	10	18:00-20:00
Friday		
Youth club (boys)	12	19:00-20:00
Saturday		
Saturday Cycling Club (Meet up)	8-10	7:00-7:15
Saturday Walking Club Seniors	10 - 12	10:00-12:00
Supplementary school / homework club for young people key stage 1,2,3 & 4.	10 - 15	10:00-13:00
Drop-in sessions / Information / Advice / Health & Wellbeing (Diet, Diabetes, Smoking, Heart Health)	10 - 12	14:00-16:00
Community Functions / Events (once a month) These types of activities will not take place, nor will the facility be bookable, while other programming is taking place.	80	Can vary - not later than 21:00
Sunday		
Gardening Club (Weekly)	5-10	11:00-13:00

DESIGN & ACCESS STATEMENT FOR:

The Proposed Change Of The Former Sutton Ambulance Station [Planning Use Class Sui Generis] To A Community Hub With Prayer Facility [Planning Use Class F.1 & F.2]
At: Dorset Road, Sutton, SM2 6JH

Bereavement Counselling, coffee and tea etc., (Open to all)	8-10	19:00-20:00
Table Tennis open session	10-12	14:00-17:00
Men's and boy's keep fit	10-15	17:00-18:00

3.7 Proposed Timetable of Prayer Use & Numbers

Prayer Times	Duration (Mon-Sun)	Estimated attendance
Dawn (Fajr) Prayer	10 minutes (time varies)	5-7
Mid-day (Zuhr) Prayer	15 minutes (1:00pm in Winter, 1.30pm in Summer)	7-10
Mid-Afternoon (Asr) Prayer	10 minutes (time varies)	7-10
Sunset (Maghrib) Prayer	15 minutes (time varies)	15-20
Evening (Isha) Prayer	20 minutes (time varies)	10-15
Friday (Jummah) Prayer Session 1 (Winter) Session 2 (Winter) Session 1 (Summer) Session 2 (Summer)	45 minutes per session (11:50 am to 12.30pm) (12.55pm to 1.25pm) (12.50pm to 1.35pm) (3.00pm to 3.45pm)	160 People 90 People 160 People 80 People

- Winter = GMT period, Summer = BST period